


## DIVINA SQUARE SERIES LIGHT( MOUNTED) USER MANUAL



Please read this installation manual carefully before installation, keep it for future reference! Products are well packed and performing well before leave our factory. Please strictly follow the instructions listed in the manual. Factory or distributor shall not be hold responsible for any mis-operation or damage caused by not following up the manual!

### Installation Diagram

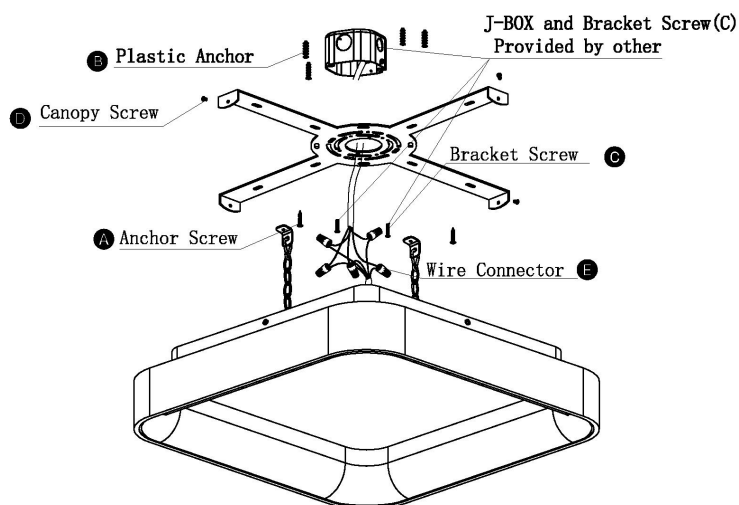


### Step 1


Shut "OFF" the electricity at main fuse box.

Place the wall switch in the "OFF" position of the room you are installing the fixture.

#### Tools You May Need

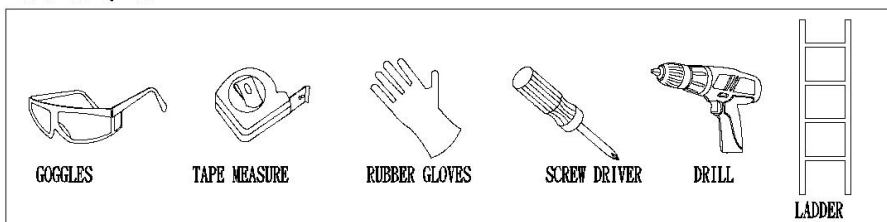


#### Circuit Box




### Step2

Use Screw driver to relief 4 Canopy screws from Bottom Bracket side.

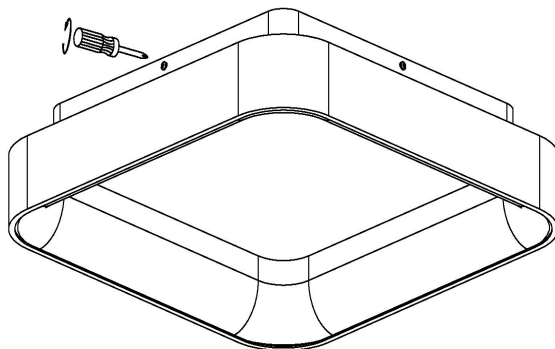


### Step3

Take out Plastic anchor , drill 4 pcs or 6 pcs diameter 6mm holes on the ceiling according to Mounting Bracket.(note: the fixture dia is bigger than 2ft\*2ft (including 2ft\*2ft), need 6pcs holes, 4 for Bracket screw, 2 for safety Bracket screw). Insert the plastic anchors into the holes. (Use 2 pcs M4\*25mm Screws to fix Mounting Bracket with J-Box, refer to picture shown below.

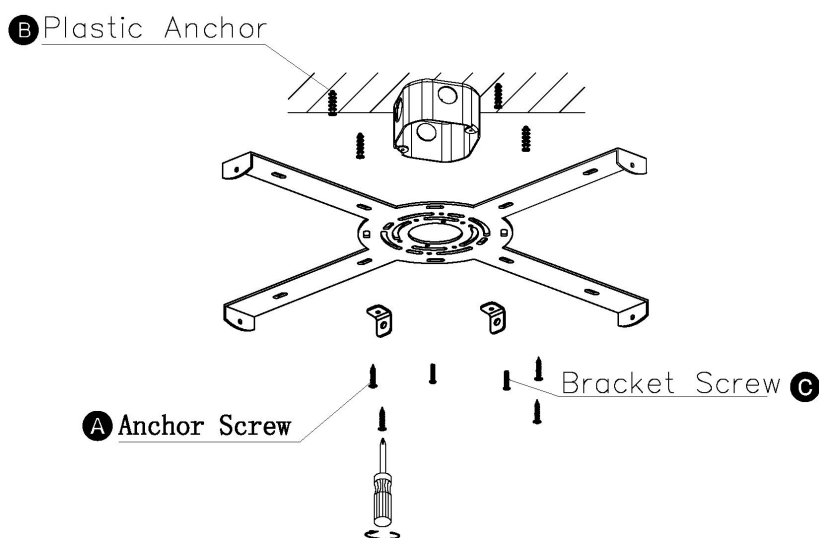

### Step4


Use 4pcs M4\*25 Self-Tapping screw to fix Mounting Bracket on the ceiling.  
NOTE: J-BOX by Garvin 54171-S or equivalent / Provided by others

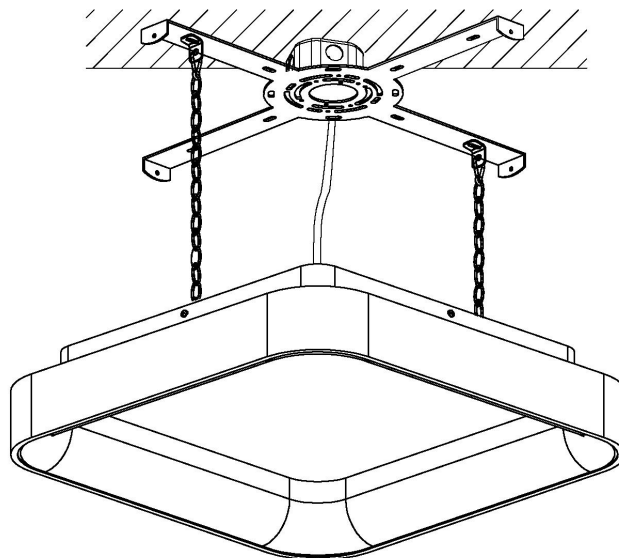

Attention: Must secure mounting plate at all connection points (junction box plus four outer points for small and medium size, or six outer points for large size) to support fixture weight appropriately. Not using all mounting points could damage the fixture and void product warranty.


### Step 5

Use wire connectors to connect L,N,G,DIM+,DIM- wires. After finish, Put all Wires with connector into J-Box

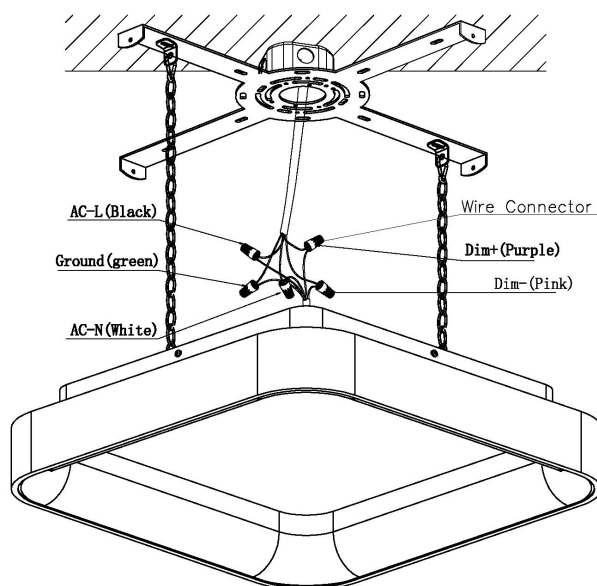


### Step 6

Have the Slot hole vertical to Side screw, put the lamp body upward. Push screw into slot, use Screw driver to fix it.

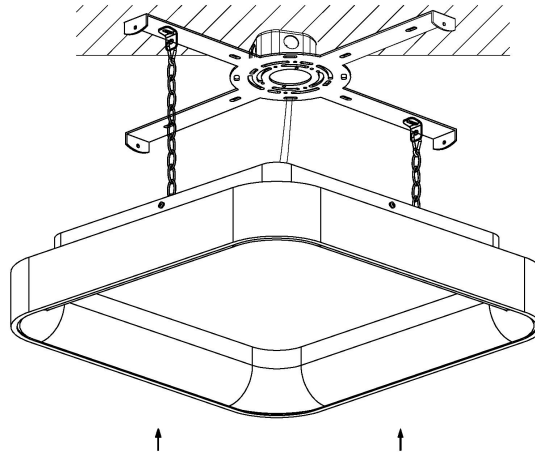


### Step 7

Turn on the electricity at main fuse box, the lighting works.

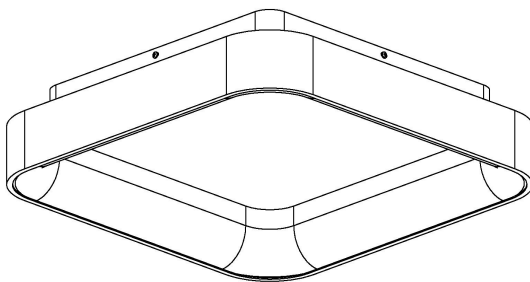

Circuit Box



### Warnings

- MIN 90 °C SUPPLY CONDUCTORS
- DAMP LOCATIONS ONLY
- CAUTION – RISK OF FIRE

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

- Application temperature for ring light is -20°C~40°C , humidity is 0~95 % . Otherwise there may be harm to the lifespan of the light.
- Please TURN OFF POWER before installation. This lamp must be installed and maintained by electrician or qualified personnel.
- Pay attention to fire prevention, electricity and shock resistance.
- Please do not cover the combustibles on the fixture.
- All screws and terminals should be tightened and tightly inserted. No loosening and improper connection are allowed. Attention should be paid to the polarity of components, power supply, driver and so on.
- Terminals should be tightened and tightly inserted. No loosening and improper