



Req. space behind
the plasterboard


80mm(3,14")




hole on the
plasterboard
255x465mm
(10,03" x 18,30")



External measures
250x460mm
(9,84" x 18,11")




Measures of the light
output
70x300mm
(2,75" x 11,81")



Height without
electrical part

80mm(3,14")



Height including the
electrical part

80mm(3,14")

General notes

WALL RECESSED LIGHTING

2415B-35

Recessed Wall lamp / CRISTALY Surface

finish : CRISTALY

GU10 ø50 MAX 2x35W / 110-277V

MODEL:

Code	2415B
Product family	Wall Recessed Lighting
Type	Recessed Wall Lamp

MATERIAL/SURFACE FINISH:

Code	004
Material	CRISTALY
Surface finish	CRISTALY

ELECTRICAL PART:

Code	35
Type	GU10 ø50
Power	MAX 2x35W
Tension	110-277V
Light Output	-----
Colour Temperature	-----
CRI	-----
Light Output of the lamp	
Dimmable	No
Power Supply	Tension
Connection	2 PVC cables
Cover	

GENERAL DATA:

Protection Index	IP20
Isolation Class	II
Weight [Kg]	3.9
Country of production	MADE IN ITALY
Mounting instruction	025.550_9010_REV02

INSTALLATION:


Multisize system	YES
Position	Wall lamp

PACKAGING:

Type	White american Box
Measures AxBxH	530x400x175mm
Gross Weight [Kg]	4.6606
Master carton	NO
Quantity of articles	
Measures AxBxH	

ACCESSORIES:

Housing Box for Brickwork

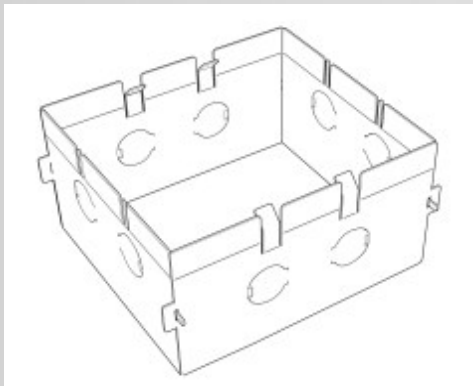


Code	023.487
Measures	465X255X85mm
Measures of the hole on Brickwork	495X285X95mm

OTHER ACCESSORIES:



Code	021.231
Description	GU4 Lampholder

LED Bulbs:

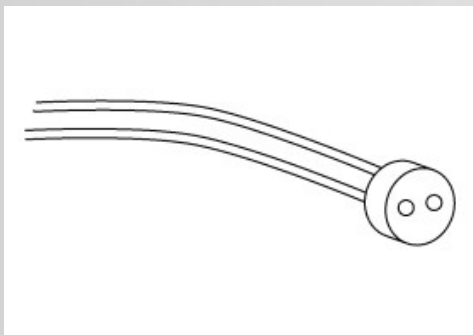

Code	L001-3018	L002-3020	L003-3022	L004-
3018				
Power	8W	8W	12W	12W
Tension	110-277V	110-277V	110-277V	110-277V
Flux	650lm	650lm	1000lm	1000lm
CRI	85	85	85	85
Color Temperature	3000°K	3000°K	3000°K	3000°K
Beam Angle	60°	30°	60°	30°