




Req. space behind the plasterboard:
-Code:4024/3024/2724
60mm(2,36")
-Code:4025/3025/2725
75mm(2,95")




hole on the plasterboard
205x175mm
(8,07"x6,88")




External measures
200x170mm
(7,87"x6,69")



Measures of the light output
90x90mm
(3,54"x3,54")



Height without electrical part
40mm
(1,57")



Height including the electrical part:
-Code:4024/3024/2724
40mm(1,57")
-Code:4025/3025/2725
65mm(2,55")

Notes on measures

4105

Recessed Spotlight / CRISTALY
Surface finish : CRISTALY

MODEL:

Code 4105
Product family CEILING AND WALL RECESSED
Type Recessed Spotlight

MATERIAL/SURFACE FINISH:

Code 004
Material CRISTALY
Surface finish CRISTALY

CODE ELECTRICAL PART

4105-3024	LED 8W-350mA-1100lm-3000°K-CRI85
4105-2724	LED 8W-350mA-1050lm-2700°K-CRI85
4105-4024	LED 8W-350mA-1160lm-4000°K-CRI85
4105-3025	LED 16W-700mA-2200lm-3000°K-CRI85
4105-2725	LED 16W-700mA-2090lm-2700°K-CRI85
4105-4025	LED 16W-700mA-2330lm-4000°K-CRI85

GENERAL DATA:

Protection Index IP20-IP44
Isolation Class III
Weight [Kg] 1.2
Country of production MADE IN ITALY
Mounting instruction 025.490_9010_REV03


INSTALLATION

Multisize system YES
Position Wall/Ceiling lighting

PACKAGING:

Type White american Box
Measures AxBxH 360x295x140mm
Gross Weight [Kg] 1.5048
Master carton NO
Quantity of articles
Measures AxBxH


FOTOMETRIC DATA 4105-2724:

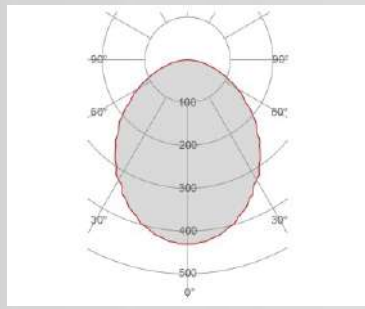

Electrical part	2724
Power	8W
Light Output	1050lm
Colour Temperature	2700°K
CRI	85
Lamp Light Output	63%
Light Output of the lamp	661.5lm
Beam Angle	96°
Beam Inclination	0°

Illuminance	1m	285lux
	2m	71lux
	3m	32lux
	4m	18lux
	5m	11lux


FOTOMETRIC DATA 4105-2725:

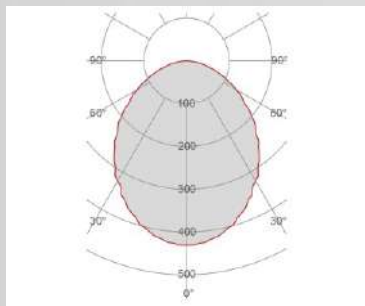

Electrical part	2725
Power	16W
Light Output	2090lm
Colour Temperature	2700°K
CRI	85
Lamp Light Output	63%
Light Output of the lamp	1316.7lm
Beam Angle	96°
Beam Inclination	0°

Illuminance	1m	567lux
	2m	142lux
	3m	63lux
	4m	35lux
	5m	23lux


FOTOMETRIC DATA 4105-3024:

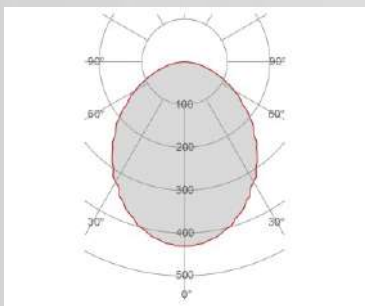

Electrical part	3024
Power	8W
Light Output	1100lm
Colour Temperature	3000°K
CRI	85
Lamp Light Output	63%
Light Output of the lamp	693lm
Beam Angle	96°
Beam Inclination	0°

Illuminance	1m	299lux
	2m	75lux
	3m	33lux
	4m	19lux
	5m	12lux


FOTOMETRIC DATA 4105-3025:

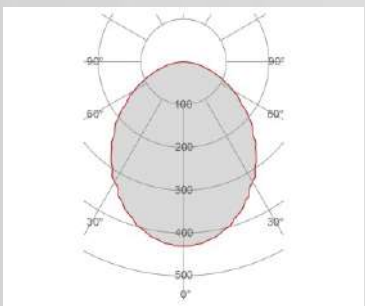

Electrical part	3025
Power	16W
Light Output	2200lm
Colour Temperature	3000°K
CRI	85
Lamp Light Output	63%
Light Output of the lamp	1386lm
Beam Angle	96°
Beam Inclination	0°

Illuminance	1m	597lux
	2m	149lux
	3m	66lux
	4m	37lux
	5m	24lux


FOTOMETRIC DATA 4105-4024:

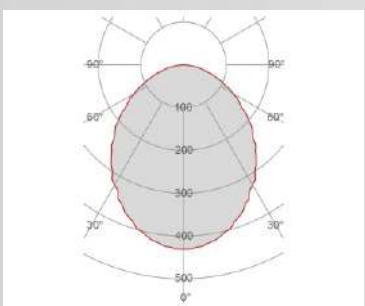

Electrical part	4024
Power	8W
Light Output	1160lm
Colour Temperature	4000°K
CRI	85
Lamp Light Output	63%
Light Output of the lamp	730.8lm
Beam Angle	96°
Beam Inclination	0°

Illuminance	1m	315lux
	2m	79lux
	3m	35lux
	4m	20lux
	5m	13lux

FOTOMETRIC DATA 4105-4025:

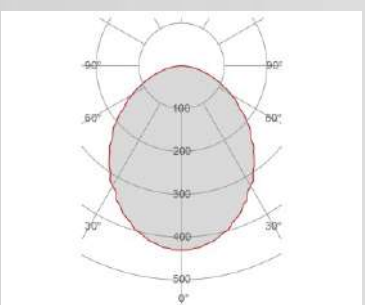


Electrical part	4025
Power	16W
Light Output	2330lm
Colour Temperature	4000°K
CRI	85
Lamp Light Output	63%
Light Output of the lamp	1467.9lm
Beam Angle	96°
Beam Inclination	0°


Illuminance	1m	633lux
	2m	158lux
	3m	70lux
	4m	40lux
	5m	25lux

ACCESSORIES

Housing Box for Brickwork




Code 023.471
Measures 175X205X75mm
Measures of the hole 205X235X85mm




Code 099.142
Description Emergency Kit
Notes

ACCESSORIES for 4105-4024/4105-3024/4105-2724


Standard Power Supply



Code 026.251
Measures 88.5x41x23mm
Power min6W max8.8W
Input 110-277V~W
Output 350mA




Code 026.252
Measures 88.5x41x23mm
Power min12.6W max18.2W
Input 110-277V~W
Output 350mA




Code 026.221
Measures 84x57x30mm
Power min9.8W max35W
Input 110-277 V~W
Output 350mA


Dimmable Power Supply



Code 026.219
Measures 155x51x26mm
Power 16.1W
Input 110-277V~W
Output 350mA
Dimmable PUSH/0-10V/DALI




Code 026.185
Measures 124x82x23mm
Power min0.7W max35W
Input 110-277V~W
Output 350mA
Dimmable PUSH/DALI




Code 026.187
Measures 124x82x23mm
Power min0.7W max35W
Input 110-277V~W
Output 350mA
Dimmable 0-10V

ACCESSORIES for 4105-4025/4105-3025/4105-2725

Standard Power Supply




Code 026.255
Measures 88.5x41x23mm
Power min11.9W max18.2W
Input 110-277V~W
Output 700mA




Code 026.256
Measures 118x42.5x24mm
Power min24.9W max35.7W
Input 110-277V~W
Output 700mA


Dimmable Power Supply



Code 026.219
Measures 155x51x26mm
Power 19.6W
Input 110-277V~W
Output 700mA
Dimmable PUSH/0-10V/DALI



Code 026.206
Measures 124x82x23mm
Power 60.2W
Input 110-277V~W
Output 700mA
Dimmable PUSH/DALI



Code 026.207
Measures 124x82x23mm
Power 60.2W
Input 110-277V~W
Output 700mA
Dimmable 0-10V