



Req. space behind
the plasterboard


110mm(4,33")



hole on the
plasterboard
190x190mm
(7,48" x 7,48")




External measures
185x185mm
(7,28" x 7,28")




Measures of the light
output

∅ 130mm(5,11")



Height without
electrical part

50mm(1,96")



Height including the
electrical part

105mm(4,13")

Notes on measures

* height including OSRAM GU10 H52 mm
lamp and lampholder

**CEILING AND WALL RECESSED LIGHTING
4175-35**

Recessed Spotlight / CRISTALY
Surface finish : CRISTALY
GU10 ∅50 MAX 35W / 110-277V

MODEL:

Code	4175
Product family	Ceiling and Wall Recessed Light
Type	Recessed Spotlight

MATERIAL/SURFACE FINISH:

Code	004
Material	CRISTALY
Surface finish	CRISTALY

ELECTRICAL PART:

Code	35
Type	GU10 ∅50
Power	Max 35W
Tension	110-277V
Light Output	----
Colour Temperature	----
CRI	----
Light Output of the lamp	
Dimmable	No
Power Supply	Tension
Connection	2 Silicon Cables
Cover	

GENERAL DATA:

Protection Index	IP20
Isolation Class	II
Weight [Kg]	1.1
Country of production	MADE IN ITALY
Mounting instruction	025.373_9010_REV08

INSTALLATION:


Multisize system	YES
Position	Wall/Ceiling light

PACKAGING:

Type	White die-cut Box
Measures AxBxH	195x195x127mm
Gross Weight [Kg]	1.999
Master carton	NO
Quantity of articles	
Measures AxBxH	

ACCESSORIES:

Housing Box for Brickwork

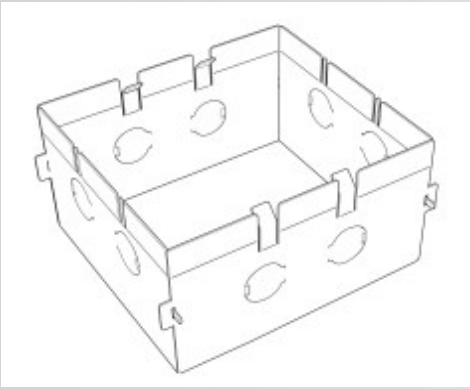

Code	023.448
Measures	190X190X125mm
Measures of the hole on Brickwork	220X220X135mm

LED bulbs:



Code	L001-3018
Power	8W
Tension	110-277V
Flux	650lm
CRI	85
Colour Temperature	3000°K
Beam Angle	60°



Code	L002-3020
Power	8W
Tension	110-277V
Flux	650lm
CRI	85
Colour Temperature	3000°K
Beam Angle	30°




Code	L003-3022
Power	12W
Tension	110-277V
Flux	1000lm
CRI	85
Colour Temperature	3000°K
Beam Angle	60°



Code	L004-3018
Power	12W
Tension	110-277V
Flux	1000lm
CRI	85
Colour Temperature	3000°K
Beam Angle	30°

OTHER ACCESSORIES:

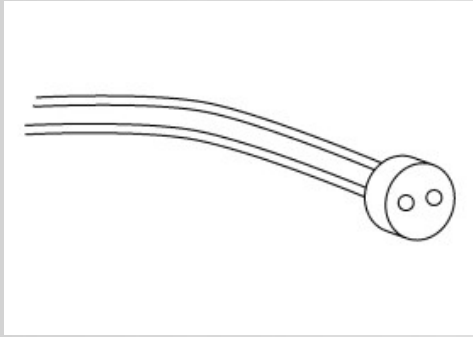

Code	021.231
Description	GU5.3 Lampholder