




Req. space behind the
plasterboard:
40mm
(1,57")

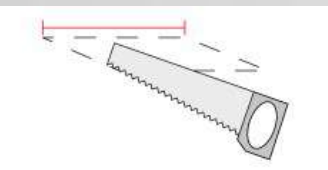


hole on the plasterboard
105x105mm
(4,13"x4,13")

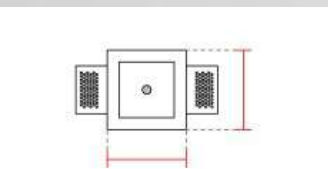


External measures
100x100mm
(3,93"x3,93")

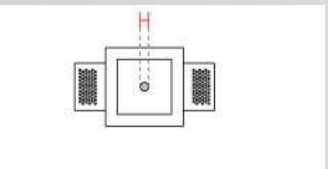

Measures of the light output
Ø11mm
(0,43")

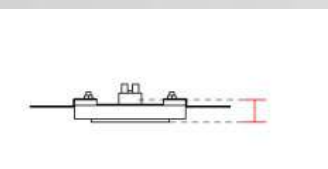

Height without electrical
part
25mm
(0,98")

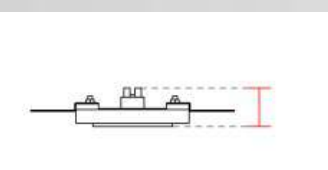

Height including the
electrical part:
35mm
(1,37")

4247A

Recessed Spotlight / CRISTALY
Surface finish : CRISTALY

MODEL:

Code	4247A
Product family	CEILING AND WALL RECESSED
Type	Recessed Spotlight

MATERIAL/SURFACE FINISH:

Code	004
Material	CRISTALY
Surface finish	CRISTALY

CODE ELECTRICAL PART

4247A-3000	LED 2W-24Vdc-200lm-3000°K-CRI90
4247A-2700	LED 2W-24Vdc-190lm-2700°K-CRI90
4247A-4000	LED 2W-24Vdc-210lm-4000°K-CRI90

GENERAL DATA:

Protection Index	IP20-IP44
Isolation Class	III
Weight [Kg]	0.35
Country of production	MADE IN ITALY
Mounting instruction	025.598_9010

INSTALLATION

Multisize system	YES
Position	Wall/Ceiling lighting


PACKAGING:

Type	White american Box
Measures AxBxH	139x139x73mm
Gross Weight [Kg]	0.3789
Master carton	NO
Quantity of articles	
Measures AxBxH	

Notes

LED maintenance without masonry work

FOTOMETRIC DATA 4247A-2700:

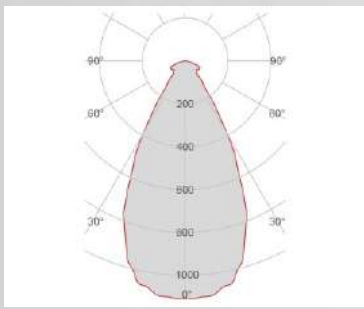


Electrical part	2700_A
Power	2W
Light Output	190lm
Colour Temperature	2700°K
CRI	90

Illuminance	1m	65lux
	2m	16lux
	3m	7lux
	4m	4lux
	5m	3lux

Lamp Light Output	31%
Light Output of the lamp	58.9lm
Beam Angle	52°
Beam Inclination	

FOTOMETRIC DATA 4247A-3000:

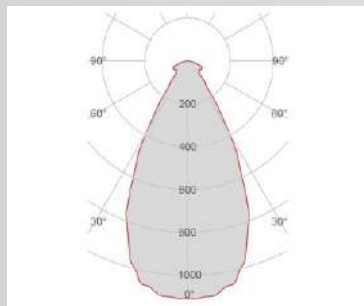


Electrical part	3000_A
Power	2W
Light Output	200lm
Colour Temperature	3000°K
CRI	90

Illuminance	1m	68lux
	2m	17lux
	3m	8lux
	4m	4lux
	5m	3lux

Lamp Light Output	31%
Light Output of the lamp	62lm
Beam Angle	52°
Beam Inclination	

FOTOMETRIC DATA 4247A-4000:

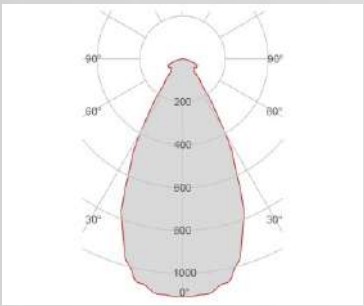


Electrical part	4000_A
Power	2W
Light Output	210lm
Colour Temperature	4000°K
CRI	90

Illuminance	1m	72lux
	2m	18lux
	3m	8lux
	4m	4lux
	5m	3lux


Lamp Light Output	31%
Light Output of the lamp	65.1lm
Beam Angle	52°
Beam Inclination	

ACCESSORIES

Housing Box for Brickwork

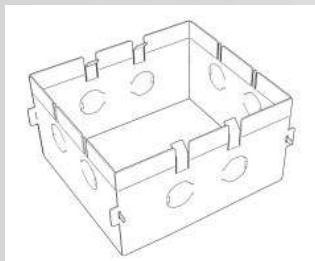


Code 023.450
Measures 105X105X65mm
Measures of the hole 135X135X75mm




Code 099.142
Description Emergency Kit
Notes


Standard Power Supply



Code 026.258
Measures 130x42x23mm
Power 12W
Input 110-277V~W
Output 24Vdc




Code 026.259
Measures 167x45x30mm
Power 36W
Input 110-277V~W
Output 24Vdc

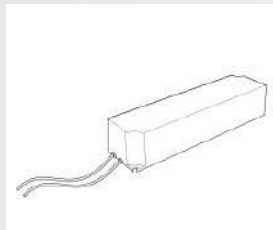


Code 026.260
Measures 157x54x36mm
Power 60W
Input 110-277V~W
Output 24Vdc

Dimmable Power Supply



Code 026.219
Measures 155x51x26mm
Power 21.6W
Input 110-277V~W
Output 24Vdc
Dimmable PUSH/0-10V/DALI

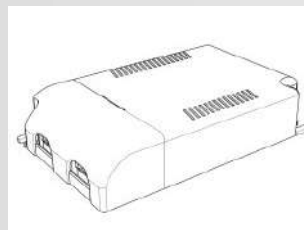

Code 026.209
Measures 125x82x29mm
Power 60W
Input 110-277 V~W
Output 24Vdc
Dimmable PUSH/1-10V