




Req. space behind the plasterboard:
Code:27153/27154/27155/30154/30155/40153/40154/40155
40mm(1,57")
Code:27150/27151/27152/30150/30151/30152/40150/40151/40152
30mm(1,18")

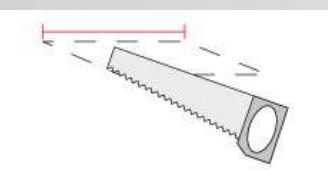


hole on the plasterboard
140x140mm
(5,51"x5,51")

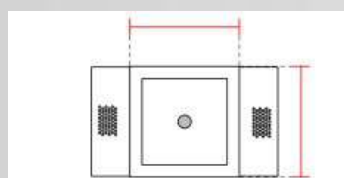


External measures
135x135mm
(5,31"x5,31")

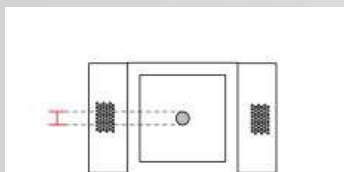

Measures of the light output
Ø16mm
(0,62")

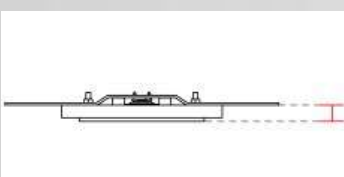

Height without electrical part
13mm
(0,51")

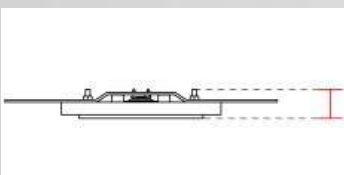

Height including the electrical part:
Code:27153/27154/27155/30154/30155/40153/40154/40155
35mm(1,37")
Code:27150/27151/27152/30150/30151/30152/40150/40151/40152
25mm(0,98")

Notes

LED maintenance without masonry work

4247E

Recessed Spotlight / CRISTALY
Surface finish : CRISTALY

MODEL:

Code 4247E
Product family CEILING AND WALL RECESSED
Type Recessed Spotlight

MATERIAL/SURFACE FINISH:

Code 004
Material CRISTALY
Surface finish CRISTALY

CODE ELECTRICAL PART

4247E-30150	LED 4W-200mA-450lm-3000°K-CRI90-60°
4247E-27150	LED 4W-200mA-430lm-2700°K-CRI90-60°
4247E-40150	LED 4W-200mA-470lm-4000°K-CRI90-60°
4247E-30153	LED 4W-200mA-450lm-3000°K-CRI90-30°
4247E-27153	LED 4W-200mA-430lm-2700°K-CRI90-30°
4247E-40153	LED 4W-200mA-470lm-4000°K-CRI90-30°
4247E-30151	LED 6.5W-350mA-650lm-3000°K-CRI90-60°
4247E-27151	LED 6.5W-350mA-620lm-2700°K-CRI90-60°
4247E-40151	LED 6.5W-350mA-680lm-4000°K-CRI90-60°
4247E-30154	LED 6.5W-350mA-650lm-3000°K-CRI90-30°
4247E-27154	LED 6.5W-350mA-620lm-2700°K-CRI90-30°
4247E-40154	LED 6.5W-350mA-680lm-4000°K-CRI90-30°
4247E-30152	LED 13W-700mA-1300lm-3000°K-CRI90-60°
4247E-27152	LED 13W-700mA-1250lm-2700°K-CRI90-60°
4247E-40152	LED 13W-700mA-1350lm-4000°K-CRI90-60°
4247E-30155	LED 13W-700mA-1300lm-3000°K-CRI90-30°
4247E-27155	LED 13W-700mA-1250lm-2700°K-CRI90-30°
4247E-40155	LED 13W-700mA-1350lm-4000°K-CRI90-30°

GENERAL DATA:

Protection Index IP20-IP44
Isolation Class III
Weight [Kg] 0.6
Country of production MADE IN ITALY
Mounting instruction 025.599_9010


INSTALLATION

Multisize system NO
Position Ceiling lighting

PACKAGING:

Type White american Box
Measures AxBxH 339x176x81mm
Gross Weight [Kg] 0.6991
Master carton NO


FOTOMETRIC DATA 4247E-27150:

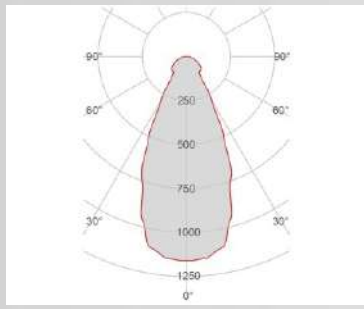

Electrical part	27150
Power	4W
Light Output	430lm
Colour Temperature	2700°K
CRI	90
Lamp Light Output	50%
Light Output of the lamp	215lm
Beam Angle	60°
Beam Inclination	

Illuminance	1m	249lux
	2m	62lux
	3m	28lux
	4m	16lux
	5m	10lux


FOTOMETRIC DATA 4247E-27151:

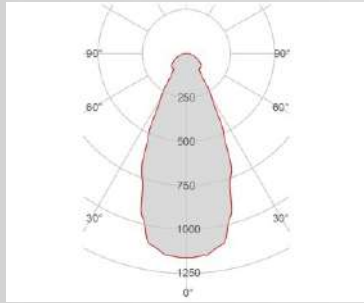

Electrical part	27151
Power	6.5W
Light Output	620lm
Colour Temperature	2700°K
CRI	90
Lamp Light Output	50%
Light Output of the lamp	310lm
Beam Angle	60°
Beam Inclination	

Illuminance	1m	360lux
	2m	90lux
	3m	40lux
	4m	22lux
	5m	14lux


FOTOMETRIC DATA 4247E-27152:

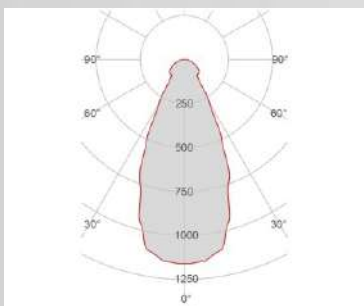

Electrical part	27152
Power	13W
Light Output	1250lm
Colour Temperature	2700°K
CRI	90
Lamp Light Output	50%
Light Output of the lamp	625lm
Beam Angle	60°
Beam Inclination	

Illuminance	1m	725lux
	2m	181lux
	3m	81lux
	4m	45lux
	5m	29lux


FOTOMETRIC DATA 4247E-27153:

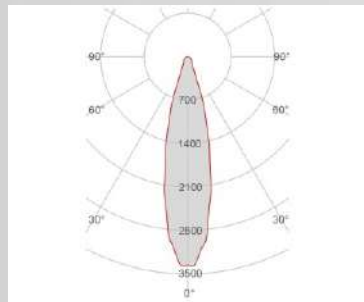

Electrical part	27153
Power	4W
Light Output	430lm
Colour Temperature	2700°K
CRI	90
Lamp Light Output	28%
Light Output of the lamp	120.4lm
Beam Angle	30°
Beam Inclination	

Illuminance	1m	404lux
	2m	101lux
	3m	45lux
	4m	25lux
	5m	16lux


FOTOMETRIC DATA 4247E-27154:

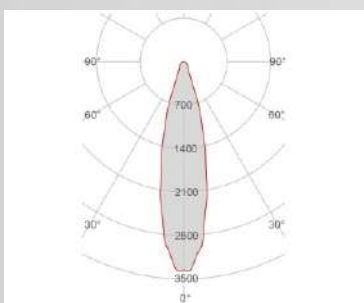

Electrical part	27154
Power	6.5W
Light Output	620lm
Colour Temperature	2700°K
CRI	90
Lamp Light Output	28%
Light Output of the lamp	173.6lm
Beam Angle	30°
Beam Inclination	

Illuminance	1m	583lux
	2m	146lux
	3m	65lux
	4m	36lux
	5m	23lux


FOTOMETRIC DATA 4247E-27155:

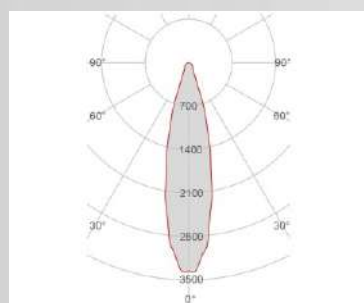

Electrical part	27155
Power	13W
Light Output	1250lm
Colour Temperature	2700°K
CRI	90
Lamp Light Output	28%
Light Output of the lamp	350lm
Beam Angle	30°
Beam Inclination	

Illuminance	1m	1175lux
	2m	294lux
	3m	131lux
	4m	73lux
	5m	47lux


FOTOMETRIC DATA 4247E-30150:

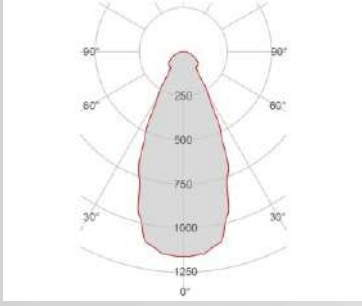

Electrical part	30150
Power	4W
Light Output	450lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	50%
Light Output of the lamp	225lm
Beam Angle	60°
Beam Inclination	

Illuminance	1m	261lux
	2m	65lux
	3m	29lux
	4m	16lux
	5m	10lux


FOTOMETRIC DATA 4247E-30151:

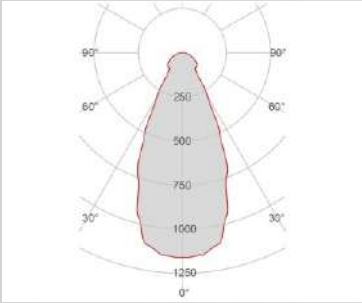

Electrical part	30151
Power	6.5W
Light Output	650lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	50%
Light Output of the lamp	325lm
Beam Angle	60°
Beam Inclination	

Illuminance	1m	377lux
	2m	94lux
	3m	42lux
	4m	24lux
	5m	15lux


FOTOMETRIC DATA 4247E-30152:

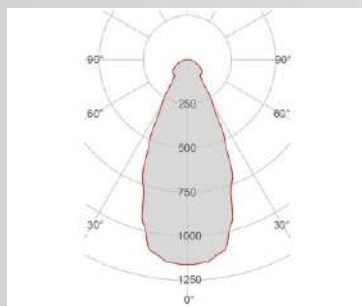

Electrical part	30152
Power	13W
Light Output	1300lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	50%
Light Output of the lamp	650lm
Beam Angle	60°
Beam Inclination	

Illuminance	1m	754lux
	2m	189lux
	3m	84lux
	4m	47lux
	5m	30lux


FOTOMETRIC DATA 4247E-30154:

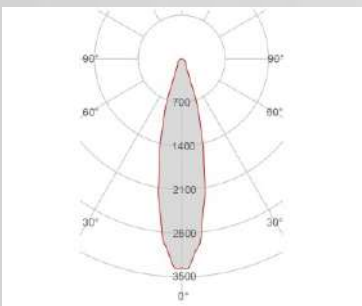

Electrical part	30154
Power	6.5W
Light Output	650lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	28%
Light Output of the lamp	182lm
Beam Angle	30°
Beam Inclination	

Illuminance	1m	611lux
	2m	153lux
	3m	68lux
	4m	38lux
	5m	24lux


FOTOMETRIC DATA 4247E-30155:

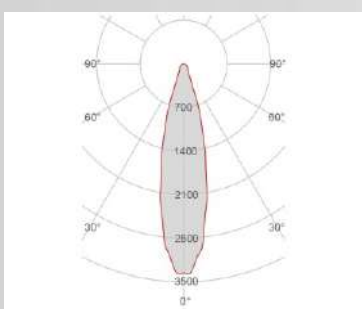

Electrical part	30155
Power	13W
Light Output	1300lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	28%
Light Output of the lamp	364lm
Beam Angle	30°
Beam Inclination	

Illuminance	1m	1222lux
	2m	305lux
	3m	136lux
	4m	76lux
	5m	49lux


FOTOMETRIC DATA 4247E-40150:

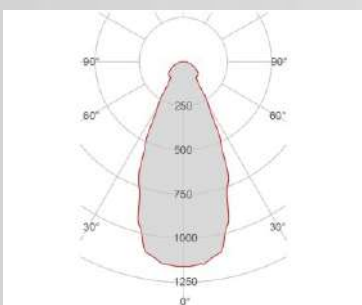

Electrical part	40150
Power	4W
Light Output	470lm
Colour Temperature	4000°K
CRI	90
Lamp Light Output	50%
Light Output of the lamp	235lm
Beam Angle	60°
Beam Inclination	


Illuminance	1m	273lux
	2m	68lux
	3m	30lux
	4m	17lux
	5m	11lux

FOTOMETRIC DATA 4247E-40151:

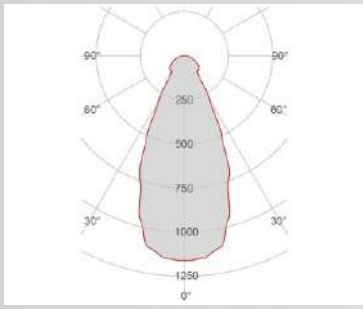


<i>Electrical part</i>	40151	<i>Illuminance</i>	1m	394lux
<i>Power</i>	6.5W		2m	99lux
<i>Light Output</i>	680lm		3m	44lux
<i>Colour Temperature</i>	4000°K		4m	25lux
<i>CRI</i>	90		5m	16lux
<i>Lamp Light Output</i>	50%			
<i>Light Output of the lamp</i>	340lm			
<i>Beam Angle</i>	60°			
<i>Beam Inclination</i>				

FOTOMETRIC DATA 4247E-40152:

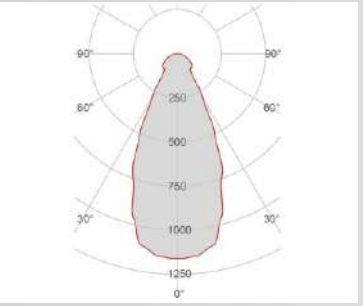


<i>Electrical part</i>	40152	<i>Illuminance</i>	1m	783lux
<i>Power</i>	13W		2m	196lux
<i>Light Output</i>	1350lm		3m	87lux
<i>Colour Temperature</i>	4000°K		4m	49lux
<i>CRI</i>	90		5m	31lux
<i>Lamp Light Output</i>	50%			
<i>Light Output of the lamp</i>	675lm			
<i>Beam Angle</i>	60°			
<i>Beam Inclination</i>				

FOTOMETRIC DATA 4247E-40153:

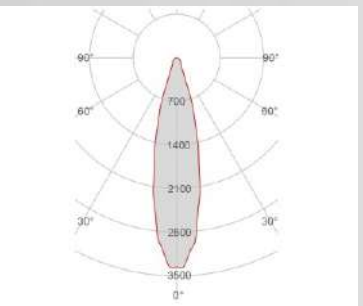


<i>Electrical part</i>	40153	<i>Illuminance</i>	1m	442lux
<i>Power</i>	4W		2m	110lux
<i>Light Output</i>	470lm		3m	49lux
<i>Colour Temperature</i>	4000°K		4m	28lux
<i>CRI</i>	90		5m	18lux
<i>Lamp Light Output</i>	28%			
<i>Light Output of the lamp</i>	131.6lm			
<i>Beam Angle</i>	30°			
<i>Beam Inclination</i>				

FOTOMETRIC DATA 4247E-40154:

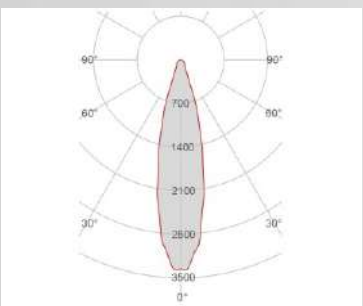

<i>Electrical part</i>	40154	<i>Illuminance</i>	1m	639lux
<i>Power</i>	6.5W		2m	160lux
<i>Light Output</i>	680lm		3m	71lux
<i>Colour Temperature</i>	4000°K		4m	40lux
<i>CRI</i>	90		5m	26lux
<i>Lamp Light Output</i>	28%			
<i>Light Output of the lamp</i>	190.4lm			
<i>Beam Angle</i>	30°			
<i>Beam Inclination</i>				

FOTOMETRIC DATA 4247E-40155:

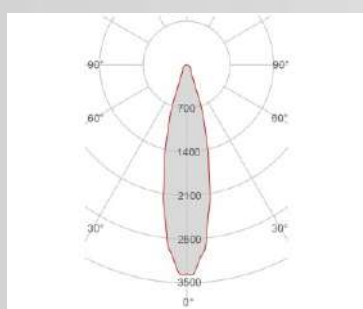


<i>Electrical part</i>	40155	<i>Illuminance</i>	1m	1269lux
<i>Power</i>	13W		2m	317lux
<i>Light Output</i>	1350lm		3m	141lux
<i>Colour Temperature</i>	4000°K		4m	79lux
<i>CRI</i>	90		5m	51lux
<i>Lamp Light Output</i>	28%			
<i>Light Output of the lamp</i>	378lm			
<i>Beam Angle</i>	30°			
<i>Beam Inclination</i>				


ACCESSORIES

Housing Box for Brickwork

Other Accessories



Code 023.4010
Measures 235X140X45mm
Measures of the hole 265X170X55mm




Code 099.142
Description Emergency Kit
Notes


ACCESSORIES FOR CODE: 27150/27153/30150/30153/40150/40153

Standard Power Supply

Dimmable Power Supply




Code 026.218
Measures 75x38x22mm
Power 8W
Input 110-277V~W
Output 200mA




Code 026.219
Measures 155x51x26mm
Power 9.2W
Input 110-277V~W
Output 200mA
Dimmable PUSH/0-10V/DALI

ACCESSORIES FOR CODE: 27151/27154/30151/30154/40151/40154


Standard Power Supply

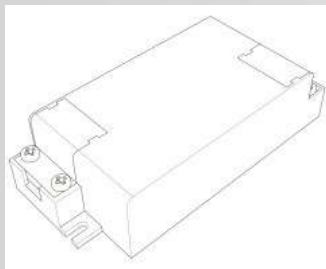

Code 026.251
Measures 88.5x41x23mm
Power min6W max8.8W
Input 110-277V~W
Output 350mA

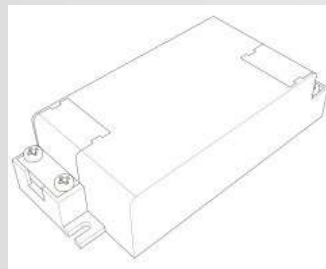


Code 026.252
Measures 88.5x41x23mm
Power min12.6W max18.2W
Input 110-277V~W
Output 350mA




Code 026.221
Measures 84x57x30mm
Power min9.8W max35W
Input 110-277V~W
Output 350mA


Dimmable Power Supply



Code 026.219
Measures 155x51x26mm
Power 16.1W
Input 110-277V~W
Output 350mA
Dimmable PUSH/0-10V/DALI

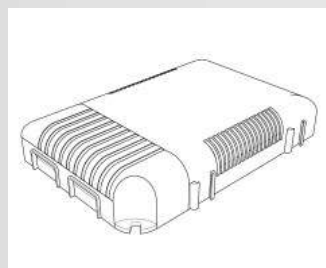


Code 026.185
Measures 124x82x23mm
Power min0.7W max35W
Input 110-277V~W
Output 350mA PUSH/
Dimmable DALI

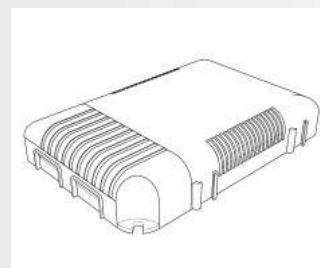


Code 026.187
Measures 124x82x23mm
Power min0.7W max35W
Input 110-277V~W
Output 350mA
Dimmable 0-10V

ACCESSORIES FOR CODE: 27152/27155/30152/30155/40152/40155

Standard Power Supply

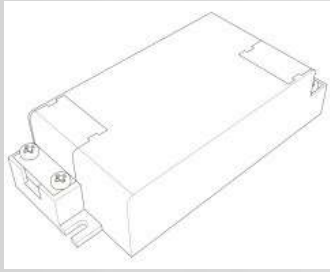


Code 026.255
Measures 88.5x41x23mm
Power min11.9W max18.2W
Input 110-277V~W
Output 700mA

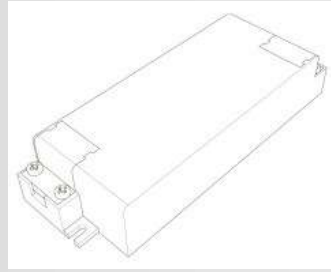


Code 026.256
Measures 118x42.5x24mm
Power min24.9W max35.7W
Input 110-277V~W
Output 700mA


Dimmable Power Supply



Code 026.219
Measures 155x51x26mm
Power 19.6W
Input 110-277V~W
Output 700mA
Dimmable PUSH/0-10V/DALI

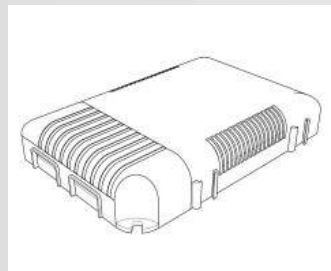

Code 026.206
Measures 124x82x23mm
Power 60.2W
Input 110-277V~W
Output 700mA
Dimmable PUSH/DALI

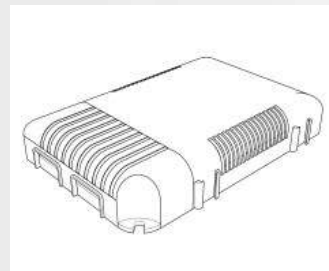

Code 026.207
Measures 124x82x23mm
Power 60.2W
Input 110-277V~W
Output 700mA
Dimmable 0-10V