




CONVERSO S
Indoor Suspension

Painted pyrex glass luminaire for indoor suspension mount. High-efficiency 24V LED circuit comprised of 120 LED/m, 3000K and CRI up to 90. Power consumption is 14W/m with lumen output of 1300 lm/m and energy efficiency of 93lm/W. IP44. Total weight 0,35kg/m. The luminaire comes wired, assembled, and ready for installation. Accessories, suspension cables, and remote 24V IP67 SELV II driver are included.

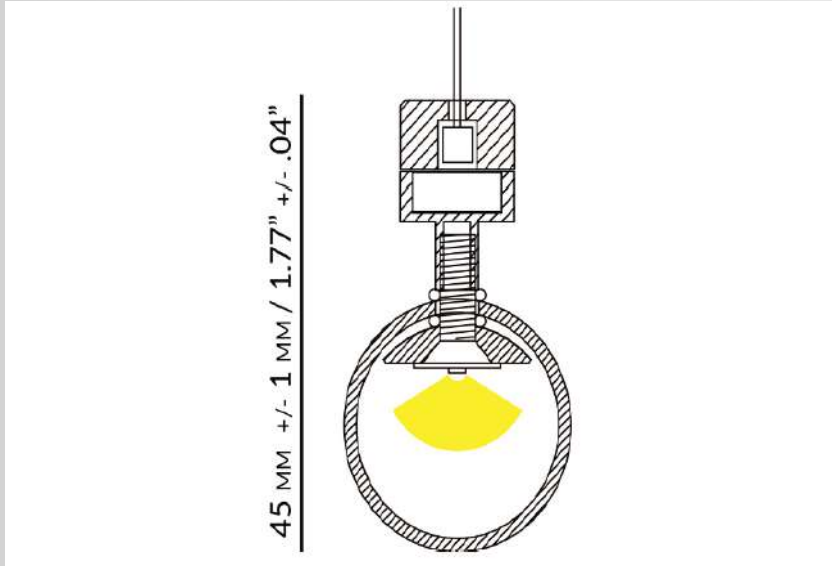

TECH SPECIFICATIONS:

Voltage:	24 Vdc
Dimmable:	On request
Temperature of use:	min -20°C / max +50°C
Glass dimension:	Ø26mm / Ø1.02"
Length:	20,24" / 32,05" / 47,8" / 57,64"
Materials:	Pyrex glass
Fixing system:	Magnetic

PROFILE CODE:	CIRCUIT CODE:	POWER (Watt/ft):	LUMEN OUTPUT (lm/ft)	OPTIC	CRI:	COLOR T°(K):
PR-C1S	SO1120P	3 W/ft	230 260 290	180°	> 90	3000 K 4000 K 6000K
PR-C1S	SOZ60P	4,3W/ft	396 427 457	180°	> 90	3000 K 4000 K 6000K
PR-C1S	Custom	/	NA	/	NA	/

AVAILABLE FINISH: **FOTOMETRIC DATA:**

Suspension electric cable:

