




## CONVERSO W/C

### Indoor ceiling and wall

Painted pyrex glass luminaire for indoor wall mount. High-efficiency 24V LED circuit comprised of 120 LED/m, 3000K and CRI up to 90. Power consumption is 14W/m with lumen output of 1300 lm/m and energy efficiency of 93lm/W. IP44. Total weight 0,35kg/m. The profile comes wired, assembled, and ready for installation. Accessories, magnetic fixing system, and remote 24V IP67 SEL II driver are included.

### TECH SPECIFICATIONS:

Voltage:	24 Vdc
Dimmable:	On request
Temperature of use:	min -20°C / max +50°C
Glass dimension:	Ø26mm / Ø1.02"
Length:	20,24" / 32,05" / 47,8" / 57,64"
Materials:	Pyrex glass
Fixing system:	Magnetic

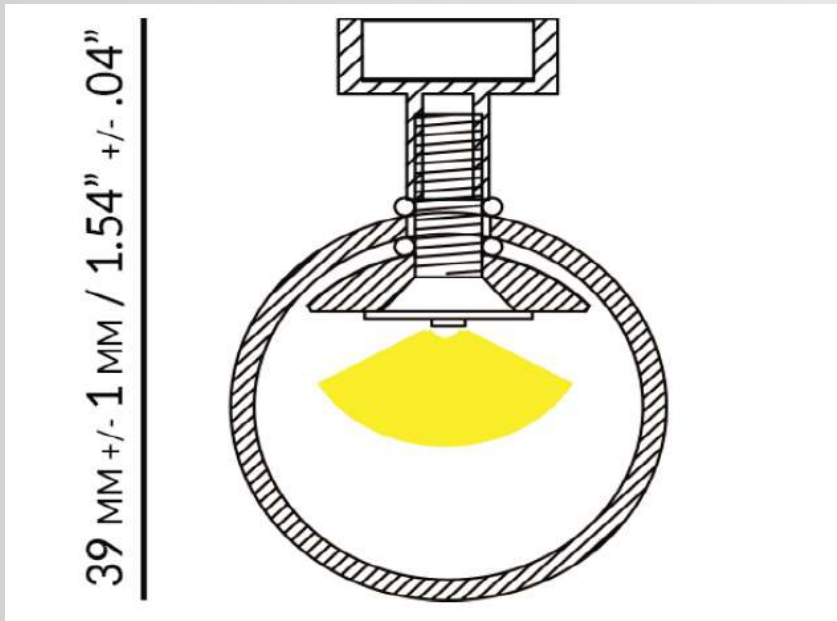

PROFILE CODE:	CIRCUIT CODE:	POWER (Watt/ft):	LUMEN OUTPUT (lm/ft):	OPTIC	CRI:	COLOR T° (K):
PR-C1W	SOI120P	3 W/ft	230	120°	> 90	3000 K
			260			4000 K
			290			6000K
PR-C1W	SOZ60P	4,3W/ft	396	120°	> 90	3000 K
			427			4000 K
			457			6000K
PR-C1W	Custom	/	NA	/	NA	/

### FOTOMETRIC DATA:

