




DM2 s
Ceiling Suspension

Anodized aluminium luminaire for indoor suspension mount with three high-efficiency 24V LED circuits comprised of 120 LED/m, 3000K and CRI up to 90. Power consumption is 30W with lumen output of 2250 lm and energy efficiency of 75lm/W. IP20. Total weight 3,38kg/m. The profile comes wired, assembled, and ready for installation. Accessories, suspension cables, and remote 24V IP67 SELV II driver are included.

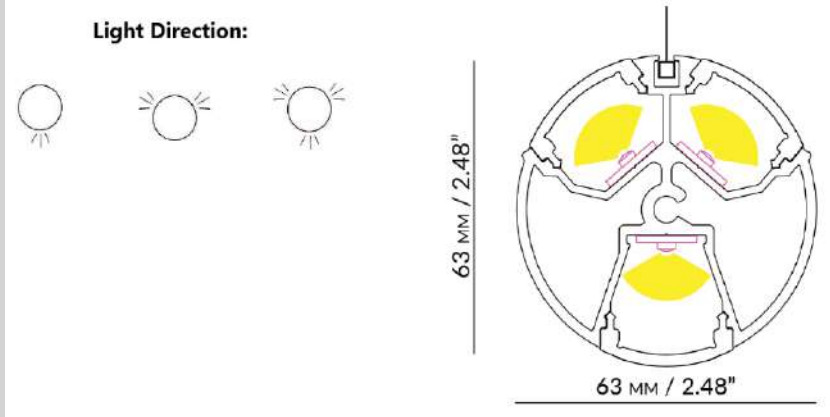

TECH SPECIFICATIONS:

Materials:	Polycarbonate and anodized aluminum
Length:	900 / 1800 mm / Custom
Dimension:	Ø 63 mm
Dimmable:	On request

PROFILE CODE:	CIRCUIT CODE:	POWER (Watt/ft):	LUMEN OUTPUT (lm/ft)	OPTIC	CRI:	COLOR T°(K):
PR-DM2S	SOI120P	3 W/ft	230	120°	> 90	3000 K
			260			4000 K
			290			6000K
PR-DM2S	SOZ60P	4,3W/ft	396	120°	> 90	3000 K
			427			4000 K
			457			6000K
PR-DM2S	SOZPRGB	4,3W/ft	NA	120°	NA	RGB
PR-DM2S	SOE120P	5,8W/ft	550	120°	> 90	3000 K
			610			4000 K
			730			6000 K
PR-DM2S	SOW126P	6,8W/ft	670	120°	> 90	3000 K
			730			4000 K
			793			6000 K
PR-DM2S	Custom	/	/	/	/	/





AVAILABLE FINISH:

Body:



Suspension Electric Cable:



AVAILABLE ACCESSORIES:



END CAP