




DEKO FRAME
Ceiling or Wall application / decorative system for indoor

Decorative, paintable, and plasterable Dekorex crown molding with integrated, anodized aluminum linear LED source for wall mount application. High-efficiency 24V LED circuit with 120 LED/m, 3000K and CRI up to 90. Power consumption is 14 W/Mt with lumen output of 1300 lm/m and energy efficiency of 93lm/W. Total weight 1,15kg/m. Custom length and finish of Dekorex crown molding. Crown molding and luminaire are delivered ready for installation including wiring and assembly. Accessories, end caps, and remote 24V IP67 SELV II driver are included.

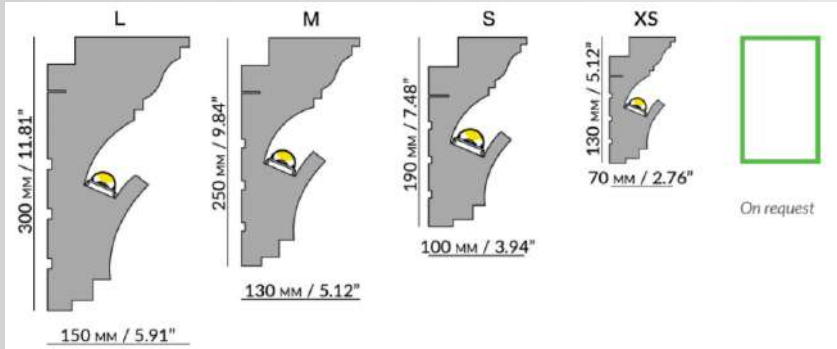

TECH SPECIFICATIONS:

Voltage: 24 Vdc
 Dimmable: On request
 Temperature of use: min -20°C / max +50°C
 Dimension: 1000mm / 2000mm / 39,37" / 78,34"
 Materials: Dekorex

PROFILE CODE:	CIRCUIT CODE:	POWER (Watt/ft):	LUMEN OUTPUT (lm/ft):	OPTIC	CRI:	COLOR T°(K):
PR-DKF	SOI120P	3 W/ft	230	120°	> 90	3000 K
			260			4000 K
			290			6000K
PR-DKF	SOZ60P	4,3W/ft	396	120°	> 90	3000 K
			427			4000 K
			457			6000K
PR-DKF	SOZPRGB	4,3W/ft	NA	120°	NA	RGB
PR-DKF	SOE120P	5,8W/ft	550	120°	> 90	3000 K
			610			4000 K
			730			6000K
PR-DKF	Custom	/	/	/	/	/

AVAILABLE FINISH:

Body:





AVAILABLE MODELS:

