




DEKO WALL

Wall application / decorative system for indoor and outdoor

Decorative, paintable, and plasterable Dekorex panel with integrated, linear anodized aluminum LED luminaire for wall mount. High-efficiency 24V LED circuit with 120 LED/m, 3000K e CRI up to 90. Power consumption is 14 W/Mt with lumen output of 1300 lm/m and energy efficiency of 93lm/W. Total weight 0,26kg/m. Dekorex panel comes ready for installation as does the already wired and assembled luminaire. Accessories, end caps, and remote 24V IP67 SELV II driver are included.

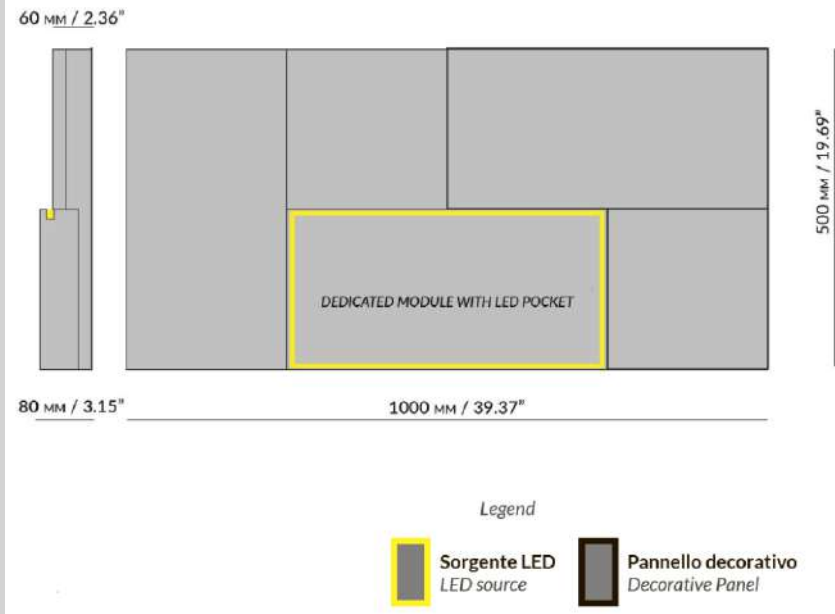

TECH SPECIFICATIONS:

- Voltage: 24 Vdc
- Dimmable: On request
- Temperature of use: min -20°C / max +50°C
- Dimension: 39,37" x 19,69" x 3,15"
- Lenght: 20,24" / 32,05" / 47,8" / 57,64"
- Materials: Dekorex

PROFILE CODE:	CIRCUIT CODE:	POWER (Watt/ft):	LUMEN OUTPUT (lm/ft):	OPTIC	CRI:	COLOR T°(K):
PR-DKP	SOI120P	3 W/ft	230	120°	> 90	3000 K
			260			4000 K
			290			6000K
PR-DKP	SOZ60P	4,3W/ft	396	120°	> 90	3000 K
			427			4000 K
			457			6000K
PR-DKP	SOZPRGB	4,3W/ft	NA	120°	NA	RGB
PR-DKP	Custom	/	NA	/	NA	/

AVAILABLE FINISH:

