



LINEAR OR




LL2821.FAXO400EL4848 20836.48.41 Smatt white aluminium

GENERAL INFORMATION:

| | |
|--------------------------|---------------------------------|
| Installation Environment | Indoor |
| Type of fitting | Recessed wall, Recessed ceiling |
| Place of application | Recessed Lights |
| Application field | Residential |

CONSTRUCTIVE & DIMENSIONAL:

| | |
|--------------|----------------|
| Length | 1010mm(39,76") |
| Width | 24,5mm(0,96") |
| Height | 16mm(0,62") |
| Cutout width | 16mm(0,62") |

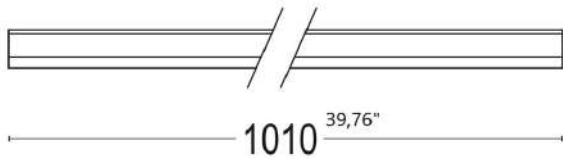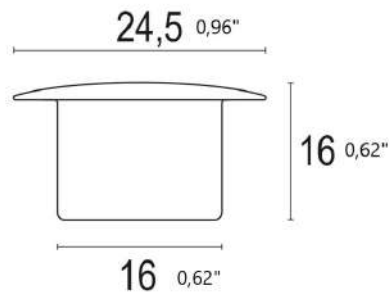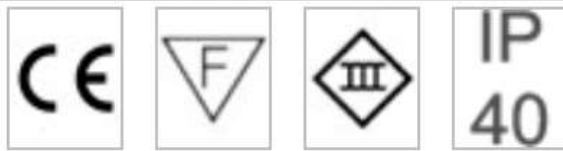


ELECTRICAL:

| | |
|------------------------|----------------------------------|
| Description | 1 x 14W LED 4000K CRI>85 1300 lm |
| Operating Power [V/mA] | 24V DC |
| Number of heads | 1 |
| Driver positioning | Remote |
| Control gear type | Electronic |
| Emergency kit | Not available |

OPTICAL:

| | |
|-----------------------|--------------------|
| Beam type | Extra wide (> 60°) |
| Beam angle [°] | 110° |
| Light distribution | Direct lighting |
| Beam directionability | Fixed |
| Diffuser finish | Opal |

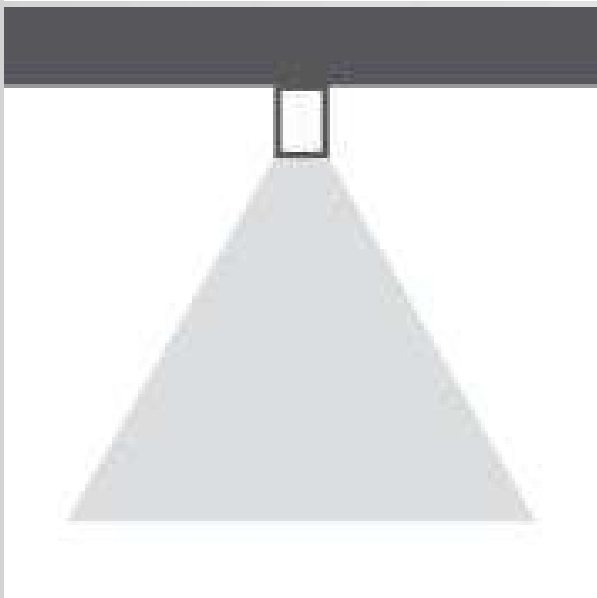

ACCESSORIES:



LED driver
Luc22028



LED driver
Luc22029



Steel fixing
clip
Luc20885



Plastic fixing
clip
Luc20886



Plasterboard
spring
Luc20894