



**LINEAR OR**



LL2822.ELXO400EL4848 20837.48.41 Smatt white aluminium

**GENERAL INFORMATION:**

Installation Environment	Indoor
Type of fitting	Recessed wall, Recessed ceiling
Place of application	Recessed Lights
Application field	Residential

**CONSTRUCTIVE & DIMENSIONAL:**

Length	2010mm(79,13")
Width	24,5mm(0,96")
Height	16mm(0,62")
Cutout width	16mm(0,62")

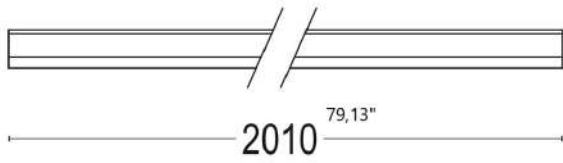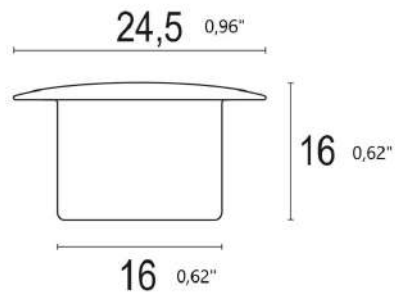


**ELECTRICAL:**

Description	1 x 28W LED 4000K CRI>85 2600 lm
Operating Power [V/mA]	24V DC
Number of heads	1
Driver positioning	Remote
Control gear type	Electronic
Emergency kit	Not available

**OPTICAL:**

Beam type	Extra wide (> 60°)
Beam angle [°]	110°
Light distribution	Direct lighting
Beam directionability	Fixed
Diffuser finish	Opal

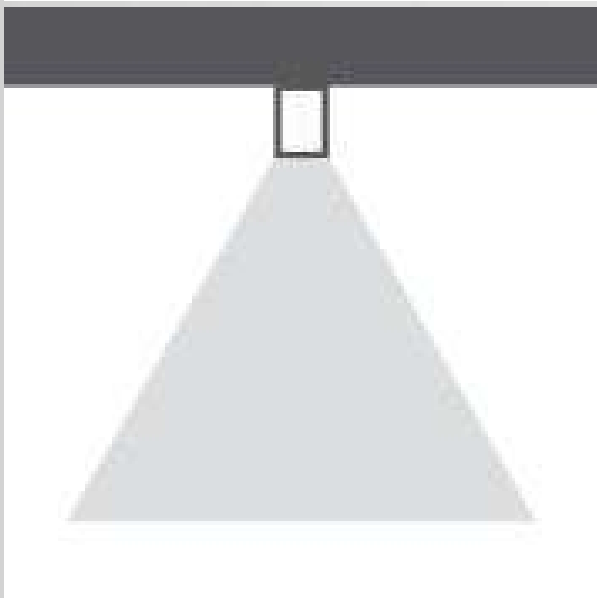

**ACCESSORIES:**

LED driver Luc22028	LED driver Luc22029	Steel fixing clip Luc20885	Plastic fixing clip Luc20886	Plasterboard spring Luc20894