



LINEAR 0W 45°

LL2814.FAXO300EL48 20830.48.31 Smatt white aluminium

GENERAL INFORMATION:

Installation Environment	Indoor
Type of fitting	Wall, Ceiling
Place of application	Ceiling/Wall Lights
Application field	Residential



CONSTRUCTIVE & DIMENSIONAL:

Length	1010mm(39,76")
Width	27mm(1,06")
Height	17,5mm(0,68")



ELECTRICAL:

Description	1 x 14W LED 3000K CRI>85 1200 lm
Operating Power [V/mA]	24V DC
Number of heads	1
Driver positioning	Remote
Control gear type	Electronic
Emergency kit	Not available

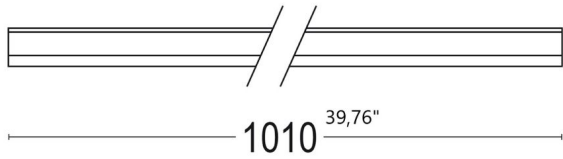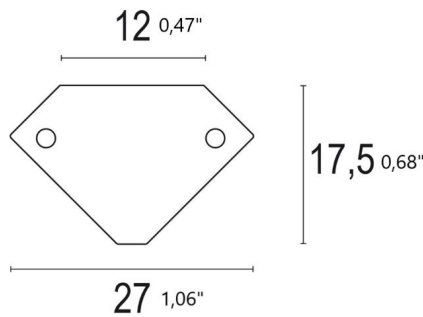

OPTICAL:

Beam type	Extra wide (> 60°)
Beam angle [°]	110°
Light distribution	Asymmetric
Beam directionability	Fixed
Diffuser finish	Opal



ACCESSORIES:



LED driver
Luc22028



LED driver
Luc22029



Steel fixing clip
Luc20890

