



LINEAR 0W AS


LL2811.FAXO400EL48 20827.48.41 Smatt white aluminium

GENERAL INFORMATION:

Installation Environment	Indoor
Type of fitting	Wall, Ceiling
Place of application	Ceiling/Wall Lights
Application field	Residential



CONSTRUCTIVE & DIMENSIONAL:

Length	1010mm(39,76")
Width	15mm(0,59")
Height	21mm(0,82")

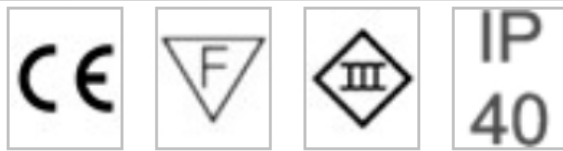


ELECTRICAL:

Description	1 x 14W LED 4000K CRI>85 1300 lm
Operating Power [V/mA]	24V DC
Number of heads	1
Driver positioning	Remote
Control gear type	Electronic
Emergency kit	Not available

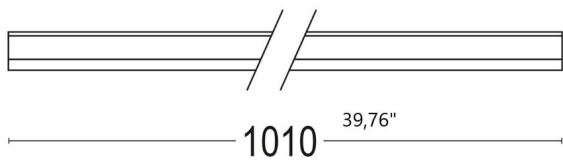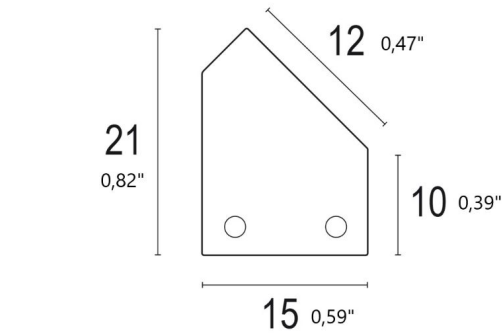

OPTICAL:

Beam type	Extra wide (> 60°)
Beam angle [°]	110°
Light distribution	Asymmetric
Beam directionability	Fixed
Diffuser finish	Opal

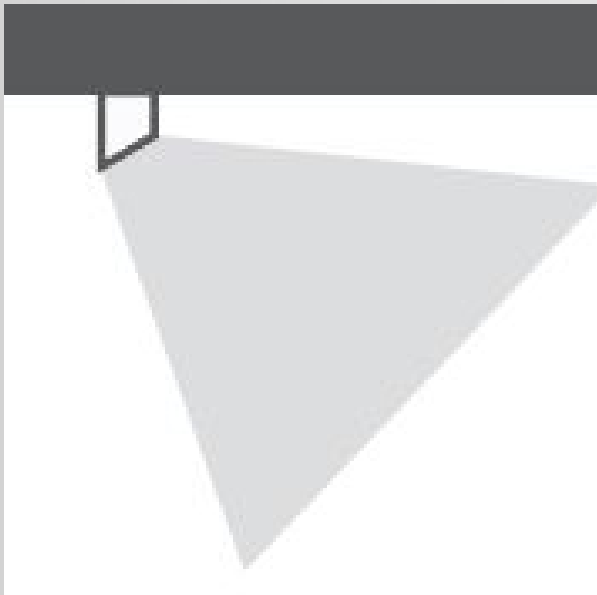

ACCESSORIES:



@B Xfj Yf
@V&&S&



@B Xfj Yf
@V&&S&-



GYV Zj Jb[Vjd
@V&S, .)