




POINT 1R RD 32

LLLL1007.BAMT300EL.40	Frosted stainless steel
LL1007.BAMT300EL.01	White (matt)
LL1007.BAMT300EL.19	Silver grey (matt)
LL1007.BAMT300EL.22	Black (matt)
LL1007.BAMT300EL.45	Rust brown

GENERAL INFORMATION:

Installation Environment	Indoor
Type of fitting	Recessed ceiling, Recessed in-ground
Place of application	Path Lights, Ceiling

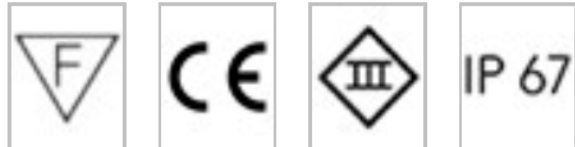

CONSTRUCTIVE & DIMENSIONAL:

Construction material	Stainless steel AISI 316L
Diameter	35mm(1,37")
Cutout shape	Round
Recessed depth	90mm(3,54")

ELECTRICAL:

Description	1 x 1.5W LED 3000K CRI>85 200 lm
Operating Power [V/mA]	24V DC
Number of heads	1
Control gear	24 VDC not included
Driver positioning	Remote
Control gear type	Electronic
Cord length [m]	0.5
Water-Lock system	Included
Emergency kit	Not available

OPTICAL:

Beam type	Medium (21° - 40°)
Beam angle [°]	32°
Light distribution	Light distribution diffused
Beam directionability	Fixed
Diffuser material	Tempered glass
Diffuser finish	Opal


ACCESSORIES:



LED driver
Luc22008



IP 68 fast
connector
Luc22080



Rough-in housing
Luc20580

