




**POINT 1R RD 32**

LL1007.BAST300EL40	Frosted stainless steel
LL1007.BAST300EL01	White (matt)
LL1007.BAST300EL19	Silver grey (matt)
LL1007.BAST300EL22	Black (matt)
LL1007.BAST300EL45	Rust brown

**GENERAL INFORMATION:**

Installation Environment	Indoor
Type of fitting	Recessed ceiling, Recessed in-ground
Place of application	Path Lights, Ceiling

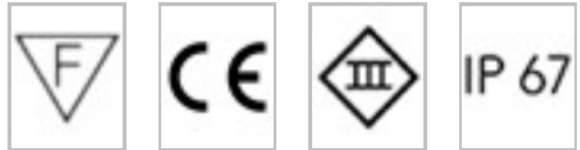

**CONSTRUCTIVE & DIMENSIONAL:**

Construction material	Stainless steel AISI 316L
Diameter	35mm(1,37")
Cutout shape	Round
Recessed depth	90mm(3,54")

**ELECTRICAL:**

Description	1 x 1.5W LED 3000K CRI>85 200 lm
Operating Power [V/mA]	24V DC
Number of heads	1
Control gear	24 VDC not included
Driver positioning	Remote
Control gear type	Electronic
Cord length [m]	0.5
Water-Lock system	Included
Emergency kit	Not available

**OPTICAL:**

Beam type	Narrow (11° - 20°)
Beam angle [°]	16°
Light distribution	Light distribution diffused
Beam directionability	Fixed
Diffuser material	Tempered glass
Diffuser finish	Opal


**ACCESSORIES:**



LED driver  
Luc22008



IP 68 fast  
connector  
Luc22080



Rough-in housing  
Luc20580

