BYİBA
BACKLIGHT

POINT 2R SQ 45

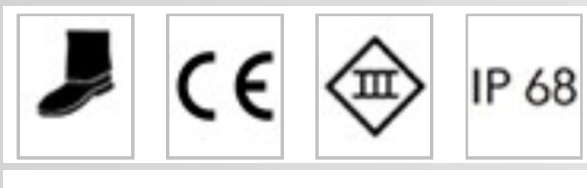

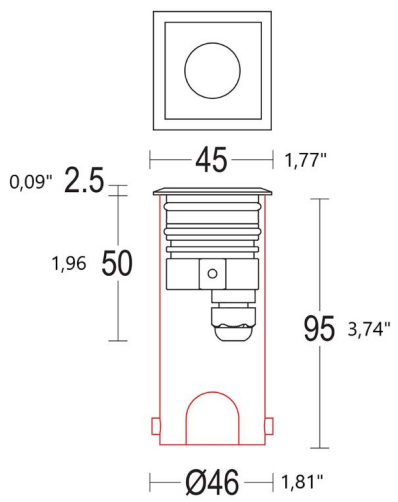

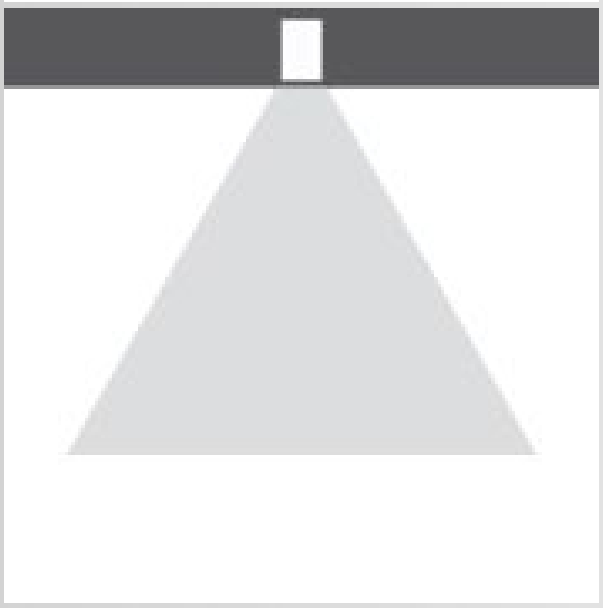

LL1228.BAMT300EC15 Stainless steel

GENERAL INFORMATION:

Installation Environment	Outdoor, Indoor
Type of fitting	Recessed ceiling, Recessed in-ground
Place of application	Ceiling, In-Ground

CONSTRUCTIVE & DIMENSIONAL:

Construction material	Stainless steel AISI 316L
Length	45mm(1,77")
Width	45mm(1,77")
Height	2,5mm(0,09")
Cutout shape	Square
Cutout diameter	46mm(1,81")
Recessed depth	95mm(3,74")

ELECTRICAL:

Description	1 x 2W LED 3000K CRI>85 225 lm
Operating Power [V/mA]	700mA
Number of heads	1
Control gear	700 mA not included
Driver positioning	Remote
Control gear type	Electronic
Cord length [m]	0,5
Emergency kit	Not available

OPTICAL:

Beam type	Wide (41° - 60°)
Beam angle [°]	47°
Light distribution	Light distribution diffused
Beam directionability	Fixed
Diffuser material	Tempered glass
Diffuser finish	Opal

ACCESSORIES:

Led driver 14W
700mA
AC624-IP67

IP 68 fast
connector
Luc22080



Rough-in
housing
Luc20581

Adaptor for installation
like box 503
AC296



Rough-in housing
Luc611

g@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA