




POINT 3R RD 55

| | | |
|--------------------|-------------|--------------------|
| LL1009.BGMT400EC40 | 20510.40.41 | Stainless steel |
| LL1009.BGMT400EC01 | 20510.01.41 | White (matt) |
| LL1009.BGMT400EC19 | 20510.19.41 | Silver grey (matt) |
| LL1009.BGMT400EC22 | 20510.22.41 | Black (matt) |
| LL1009.BGMT400EC45 | 20510.45.41 | Rust brown |

GENERAL INFORMATION:

| | |
|--------------------------|--------------------------------------|
| Installation Environment | Indoor |
| Type of fitting | Recessed ceiling, Recessed in-ground |
| Place of application | Path Lights, Ceiling |

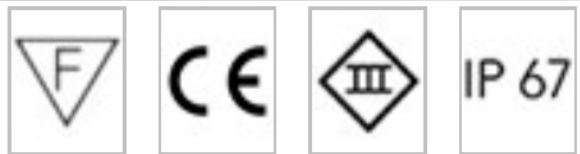

CONSTRUCTIVE & DIMENSIONAL:

| | |
|-----------------------|---------------------------|
| Construction material | Stainless steel AISI 316L |
| Diameter | 55mm(2,16") |
| Cutout shape | Round |
| Recessed depth | 100mm(3,93") |

ELECTRICAL:

| | |
|------------------------|--------------------------------|
| Description | 1 x 3W LED 4000K CRI>85 335 lm |
| Operating Power [V/mA] | 1050mA |
| Number of heads | 1 |
| Control gear | 1050 mA not included |
| Driver positioning | Remote |
| Control gear type | Electronic |
| Cord length [m] | 0.5 |
| Emergency kit | Not available |


OPTICAL:

| | |
|-----------------------|-----------------------------|
| Beam type | Medium (21° - 40°) |
| Beam angle [°] | 37° |
| Light distribution | Light distribution diffused |
| Beam directionability | Fixed |
| Diffuser material | Polycarbonate |

ACCESSORIES:



LED driver
Luc22017



Rough-in housing
Luc20582

