




**POINT 3R RD 55**

LL1009.BGST400EC40	20511.40.41	Stainless steel
LL1009.BGST400EC01	20511.01.41	White (matt)
LL1009.BGST400EC19	20511.19.41	Silver grey (matt)
LL1009.BGST400EC22	20511.22.41	Black (matt)
LL1009.BGST400EC45	20511.45.41	Rust brown

**GENERAL INFORMATION:**

Installation Environment	Indoor
Type of fitting	Recessed ceiling, Recessed in-ground
Place of application	Path Lights, Ceiling

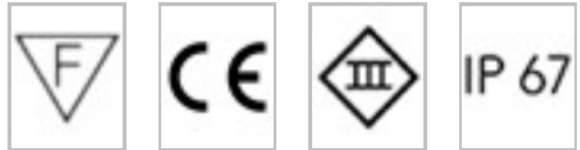

**CONSTRUCTIVE & DIMENSIONAL:**

Construction material	Stainless steel AISI 316L
Diameter	55mm(2,16")
Cutout shape	Round
Recessed depth	100mm(3,93")

**ELECTRICAL:**

Description	1 x 3W LED 4000K CRI>85 335 lm
Operating Power [V/mA]	1050mA
Number of heads	1
Control gear	1050 mA not included
Driver positioning	Remote
Control gear type	Electronic
Cord length [m]	0.5
Emergency kit	Not available


**OPTICAL:**

Beam type	Extra narrow (0° - 10°)
Beam angle [°]	10°
Light distribution	Light distribution diffused
Beam directionability	Fixed
Diffuser material	Polycarbonate

**ACCESSORIES:**



LED driver  
Luc22017



Rough-in housing  
Luc20582

