




**Q39S
Ceiling Suspension**

Anodized aluminum luminaire for indoor suspension mount with high-efficiency 24V LED circuit of 120 LED/m, 3000K and CRI up to 90. Power consumption is 19W/m with a lumen output of 1800 lm/m and energy efficiency of 95lm/W. IP20. Total weight 0,28kg/m. The profile comes wired, assembled, and ready for installation. Accessories, suspension cables, and remote 24V IP67 SELV II driver are included.

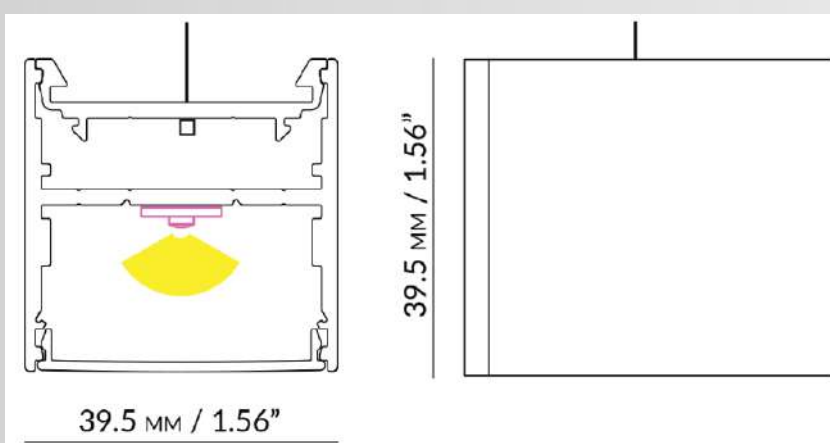

TECH SPECIFICATIONS:

Materials:	Polycarbonate and anodized aluminum
Length:	Custom
Dimension:	39,5 x 39,5mm / 1,56" x 1,56"
Dimmable:	On request
Operating temperature:	Ta min -20°C / Ta max + 50 °C

PROFILE CODE:	CIRCUIT CODE:	POWER (Watt/ft):	LUMEN OUTPUT (lm/ft)	OPTIC	CRI:	COLOR T° (K):
PR-Q39S	SOI120P	3 W/ft	230	120°	> 90	3000 K
			260			4000 K
			290			6000K
PR-Q39S	SOZ60P	4,3W/ft	396	120°	> 90	3000 K
			427			4000 K
			457			6000K
PR-Q39S	SOZPRGB	4,3W/ft	NA	120°	NA	RGB
PR-Q39S	SOE120P	5,8W/ft	550	120°	> 90	3000 K
			610			4000 K
			730			6000 K
PR-Q39S	SOW126P	6,8W/ft	670	120°	> 90	3000 K
			730			4000 K
			793			6000 K
PR-Q39S	Custom	/	/	/	/	/






AVAILABLE FINISH:


Body:



Suspension Electric Cable:

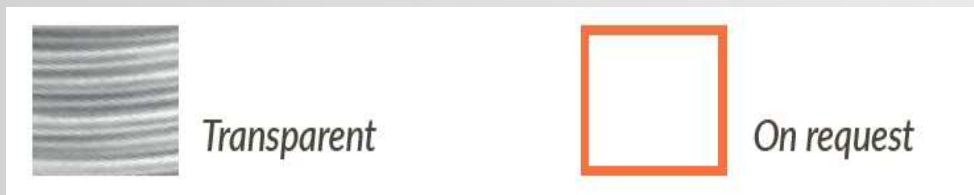

INSTALLATION CONFIGURATIONS:

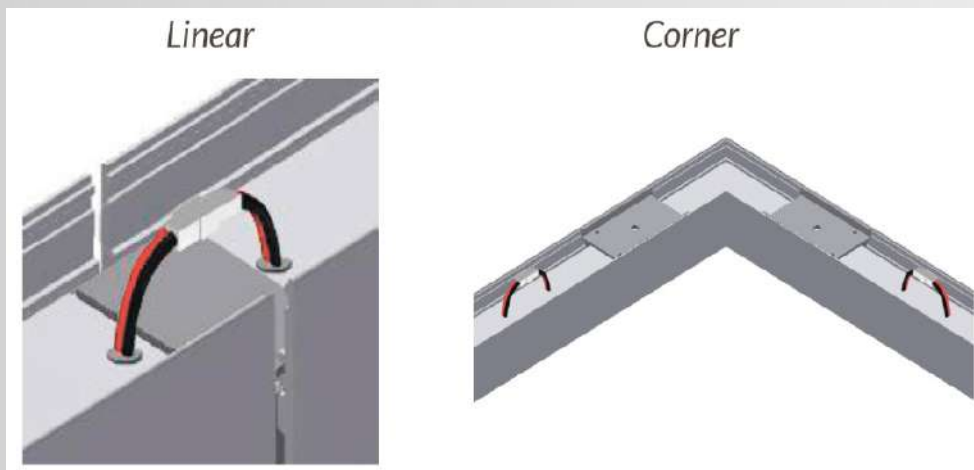

Accessories:

- End Cap
- Suspension KIT

FOTOMETRIC DATA:

