





**METROFFICE**


**METROFFICE 1**

1210-BB-C(C)-K-J-1-I  
1210-BB-C(C)-K-J-2GGH-I

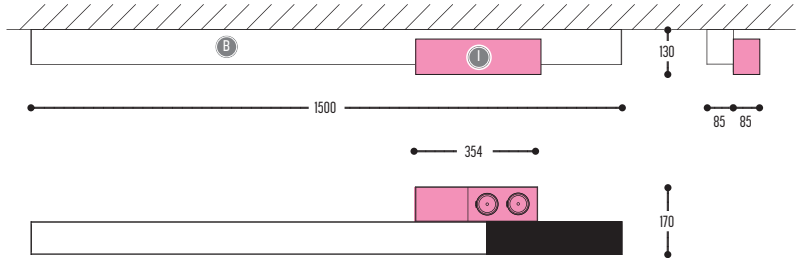

**METROFFICE 2**

1211-BB-C(C)-K-J-1-I  
1211-BB-C(C)-K-J-2GGH-I

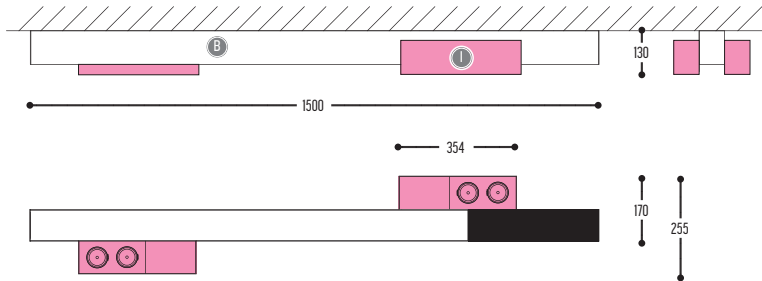


BB	C(C)	K	J	M				I
COLORS	TYPE 1	DRIVER	DIFFUSER	TYPE 2				COLORS
02 Black 03 White	3 LED >80 CRI • 7640 Lm / 49,6 W / 3000K 13 LED >80 CRI • 4100 Lm / 24,8 W / 3000K	0 incl./non dim 2 Dim 1-10 V 3 Dali	0 opal 1 prismatic	110-277V	1	GUI0	QPAR51 (MAX 50 W)	B Black W White G Gold point C Copper point
					E CRI • LUMENOUTPUT		GG REFLECTOR	H COLOR TEMP.
				LED	2	>85 CRI • 2x 1000 Lm / 350 mA / 9 W	22 22° 34 34° 54 54°	2 2700 K 3 3000 K





**METROFFICE**

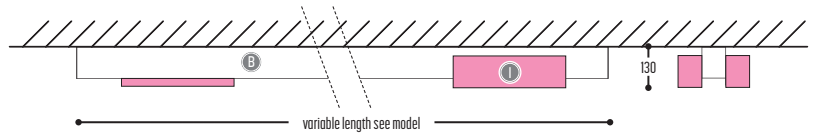

PC | Alu

6 kg/m	CE	Grounding symbol	110-277V	0,5m	UGR <math>< 19</math> prismatic
LED	96°	IP20	Light distribution diagram	House icon	Upward arrow icon

BB		C(C)		
COLORS		TYPE 1		
02	Black	3	LED	Metroffice 7 >80 CRI • 15280 Lm / 99,2 W / 3000K
03	White			Metroffice 8 >80 CRI • 17190 Lm / 111,6 W / 3000K
				Metroffice 9 >80 CRI • 19100 Lm / 123,8 W / 3000K
		13	LED	Metroffice 10 >80 CRI • 21000 Lm / 136,1 W / 3000K
				Metroffice 11 >80 CRI • 22920 Lm / 148,4 W / 3000K
				Metroffice 12 >80 CRI • 24830 Lm / 160,7 W / 3000K
				Metroffice 13 >80 CRI • 26740 Lm / 173 W / 3000K
				Metroffice 7 >80 CRI • 8200 Lm / 49,6 W / 3000K
				Metroffice 8 >80 CRI • 9225 Lm / 55,8 W / 3000K
				Metroffice 9 >80 CRI • 10250 Lm / 62 W / 3000K
				Metroffice 10 >80 CRI • 11275 Lm / 68,2 W / 3000K
				Metroffice 11 >80 CRI • 12300 Lm / 74,7 W / 3000K
				Metroffice 12 >80 CRI • 13325 Lm / 80,6 W / 3000K
				Metroffice 13 >80 CRI • 15375 Lm / 86,8 W / 3000K






**METROFFICE**


**METROFFICE 7**

1320-BB-C(C)-K-J-1-I  
1320-BB-C(C)-K-J-2GGH-I




**METROFFICE 8**

1321-BB-C(C)-K-J-1-I  
1321-BB-C(C)-K-J-2GGH-I



**METROFFICE 9**

1322-BB-C(C)-K-J-1-I  
1322-BB-C(C)-K-J-2GGH-I




**METROFFICE 10**

1323-BB-C(C)-K-J-1-I  
1323-BB-C(C)-K-J-2GGH-I




**METROFFICE 11**

1324-BB-C(C)-K-J-1-I  
1324-BB-C(C)-K-J-2GGH-I




**METROFFICE 12**

1325-BB-C(C)-K-J-1-I  
1325-BB-C(C)-K-J-2GGH-I



**METROFFICE 13**

1326-BB-C(C)-K-J-1-I  
1326-BB-C(C)-K-J-2GGH-I



K		J		M						I		
DRIVER		DIFFUSER		TYPE 2						COLORS		
0	incl./non dim	0	opal	110-277V	1	GU10		QPAR51 (MAX 50 W)	B		Black	
2	Dim 1-10 V	1	prismatic						W		White	
3	Dali								G		Gold point	
				E		GG	H	C		Copper point		
				CRI • LUMENOUTPUT		REFLECTOR	COLOR TEMP.					
				LED	2	>85 CRI • 2x1000 Lm / 350 mA / 9 W	22	22°	2	2700 K		
							34	34°	3	3000 K		
							54	54°				