



Req. space behind the plasterboard:


30mm(1,18")




hole on the plasterboard
-P001B 37x1025 ±10mm
(1,45"x40,35"±0,39")
-P001C 37x2025 ±10mm
(1,45"x79,72"±0,39")
-P001D 37x3025 ±10mm
(1,45"x119,09"±0,39")



External measures
-P001B 90x1020 ±10mm
(3,54"x40,15"±0,39")
-P001C 90x2020 ±10mm
(3,54"x79,52"±0,39")
-P001D 90x3020 ±10mm
(3,54"x118,89"±0,39")



Measures of the light output
-P001B 36x1020 ±10mm
(1,41"x40,15"±0,39")
-P001C 36x1020 ±10mm
(1,41"x79,52"±0,39")
-P001D 36x3020 ±10mm
(1,41"x118,89"±0,39")



Height without electrical part

35mm(1,37")

PROFILES
P015

Recessed Profile / ALUMITE
Surface finish : ALUMITE
Without electrical part

MODEL:

Product family PROFILES
Type Recessed Profile

MATERIAL/SURFACE FINISH:

Code 006
Material ALUMITE
Surface finish ALUMITE

ELECTRICAL PART:

Code 00
Type Without electrical part

GENERAL DATA:

Weight [Kg] P001B/P001C/P001D
0.8/1.6/2.4
Cover METACRILATO OPALINO
Country of production MADE IN ITALY
Mounting instruction 025.452_9010_REV02

INSTALLATION

Multisize system No
Position Wall/Ceiling lighting


PACKAGING:

Type Brown carton tube
Measures AxBxH 90x90x1100mm(P001B)
90x90x2100mm(P001C)
90x90x3100mm(P001D)
Gross Weight [Kg] 0.9827(P001B)
1.9487(P001C)
2.9148(P001D)
Master carton NO
Quantity of articles
Measures AxBxH

General Notes:

- LED= MAX 40W/m
 - Included in the packaging of each profile:
 - ALUMITE® profile;
 - Screen in opal methacrylate;
- STRIP LED 9010 TO BE ORDERED SEPARATELY.


FOTOMETRIC DATA P001B-00:

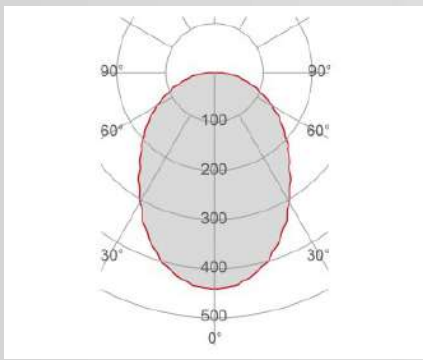

| | |
|-------------------------|-------------|
| Electrical part | 021.792.100 |
| Power | 26W |
| Light Output | 3000lm |
| Colour Temperature | 3000°K |
| CRI | 90 |
| Lamp Light Output Light | 58% |
| Output of the lamp | 1740lm |
| Beam Angle | 86° |
| Beam Inclination | 0° |

| | | |
|-------------|----|--------|
| Illuminance | 1m | 767lux |
| | 2m | 192lux |
| | 3m | 85lux |
| | 4m | 48lux |
| | 5m | 31lux |


FOTOMETRIC DATA P001C-00:

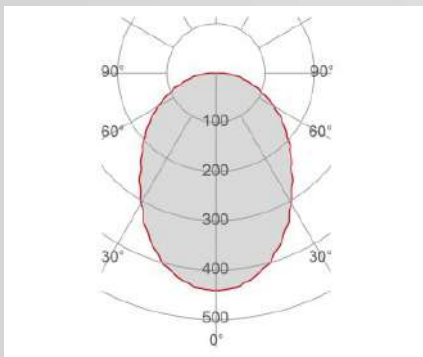

| | |
|-------------------------|-------------|
| Electrical part | 021.792.200 |
| Power | 52W |
| Light Output | 6000lm |
| Colour Temperature | 3000°K |
| CRI | 90 |
| Lamp Light Output Light | 58% |
| Output of the lamp | 3480lm |
| Beam Angle | 86° |
| Beam Inclination | 0° |

| | | |
|-------------|----|---------|
| Illuminance | 1m | 1535lux |
| | 2m | 384lux |
| | 3m | 171lux |
| | 4m | 96lux |
| | 5m | 61lux |

FOTOMETRIC DATA P001D-00:

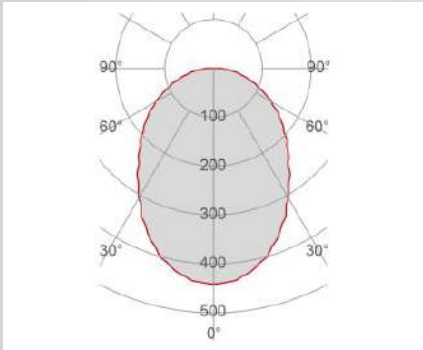


| | |
|-------------------------|-------------|
| Electrical part | 021.792.300 |
| Power | 78W |
| Light Output | 9000lm |
| Colour Temperature | 3000°K |
| CRI | 90 |
| Lamp Light Output Light | 58% |
| Output of the lamp | 5220lm |
| Beam Angle | 86° |
| Beam Inclination | 0° |

| | | |
|-------------|----|---------|
| Illuminance | 1m | 2302lux |
| | 2m | 576lux |
| | 3m | 256lux |
| | 4m | 144lux |
| | 5m | 92lux |

ACCESSORIES:

LED strip



| | |
|--------------------|----------|
| Code | 021.793 |
| Power | 10W/m |
| Tension | 24Vdc |
| Flux | 1150lm/m |
| Colour Temperature | 3000°K |
| CRI | 90 |
| led/m | 224 |



| | |
|--------------------|----------|
| Code | 021.790 |
| Power | 15W/m |
| Tension | 24Vdc |
| Flux | 1400lm/m |
| Colour Temperature | 3000°K |
| CRI | 90 |
| led/m | 140 |



| | |
|--------------------|----------|
| Code | 021.791 |
| Power | 18W/m |
| Tension | 24Vdc |
| Flux | 2000lm/m |
| Colour Temperature | 3000°K |
| CRI | 90 |
| led/m | 224 |




| | |
|--------------------|----------|
| Code | 021.792 |
| Power | 26W/m |
| Tension | 24Vdc |
| Flux | 3000lm/m |
| Colour Temperature | 3000°K |
| CRI | 90 |
| led/m | 224 |




| | |
|--------------------|---------------|
| Code | 021.794 |
| Power | 20W/m |
| Tension | 24Vdc |
| Flux | 1800-2000lm/m |
| Colour Temperature | 2700K-6000K |
| CRI | 85 |
| led/m | 160 |

OTHER ACCESSORIES

Other Accessories

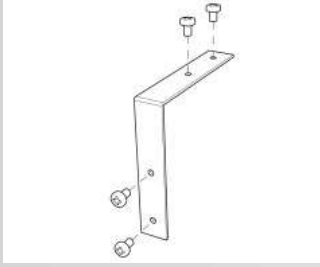


Code 023.704
Description Wall/Ceiling connection
Notes

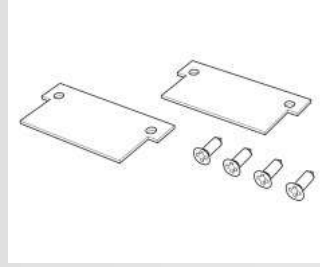


Code P001.KIT01
Description Couple of end caps
Notes




Code 029.009.100
Description Replacement opal cover
Notes L 1000mm




Code TGA
Description Cut to size
Notes (45°-90°)

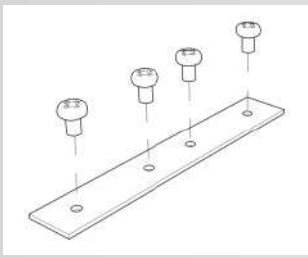


Code 023.700
Description Linear connection
Notes

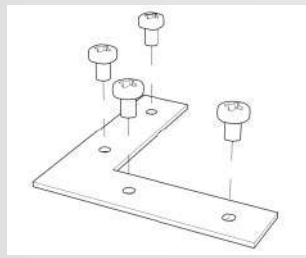

Code 023.701
Description L connection
Notes

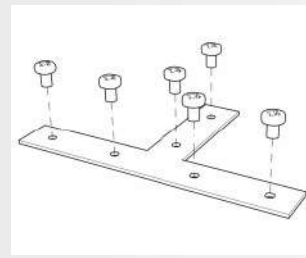

Code 023.702
Description T connection
Notes

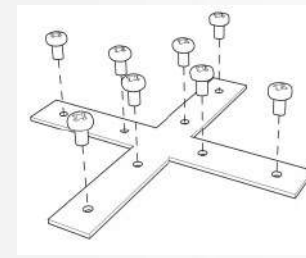

Code 023.703
Description X connection
Notes