


Req. space behind  
the plasterboard


30mm(1,18")




hole on the plasterboard:  
-P004B 60x1025 ±10mm  
(2,36"x40,35"±0,39")  
-P004C 60x2025 ±10mm  
(2,36"x79,72"±0,39")  
-P004D 60x3020 ±10mm  
(2,36"x118,89"±0,39")

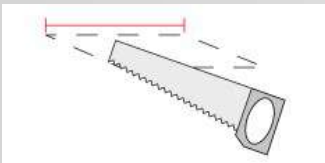

External measures  
-P004B 104x1020 ±10mm  
(4,09"x40,15"±0,39")  
-P004C 104x2020 ±10mm  
(4,09"x79,52"±0,39")  
-P004D 104x3020 ±10mm  
(4,09"x118,89"±0,39")

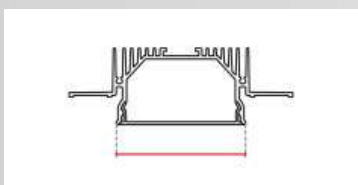

Measures of the light  
output  
-P004B 57x1020 ±10mm  
(2,24"x40,15"±0,39")  
-P004C 57x1020 ±10mm  
(2,24"x79,52"±0,39")  
-P004D 57x3020 ±10mm  
(2,24"x118,89"±0,39")

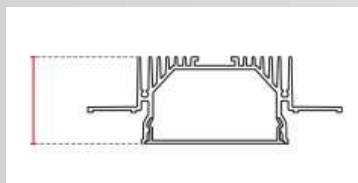

Height without  
electrical part

35mm(1,37")

#### General Notes:

- LED= MAX 40W/m
  - Included in the packaging of each profile:
    - ALUMITE® profile;
    - Dual Cover screen:
      - A) Disposable screen for the installation
      - B) Opal methacrylate screen;
- STRIP LED 9010 TO BE ORDERED SEPARATELY.

#### PROFILES

##### P004

Recessed Profile / ALUMITE

Surface finish : ALUMITE

Without electrical part

#### MODEL:

Product family

PROFILES

Type

Recessed Profile

#### MATERIAL/SURFACE FINISH:

Code

006

Material

ALUMITE

Surface finish

ALUMITE

#### ELECTRICAL PART:

Code

00

Type

Without electrical part

#### GENERAL DATA:

P004B/P004C/P004D

Weight [Kg]

1.3/2.6/3.9

Cover

METACRILATO OPALINO

Country of production

MADE IN ITALY

Mounting instruction

025.481\_9010\_REV03

#### INSTALLATION

Multisize system

No

Position

Wall/Ceiling lighting

#### PACKAGING:

Type

Brown carton tube

Measures AxBxH

120x120x1100mm(P004B)

120x120x2100mm(P004C)

120x120x3100mm(P004D)

Gross Weight [Kg]

1.6247(P004B) /3.2199(P004C) /

4.8151(P004D)


NO

Master carton

Quantity of articles

Measures AxBxH


## FOTOMETRIC DATA P004B-00:

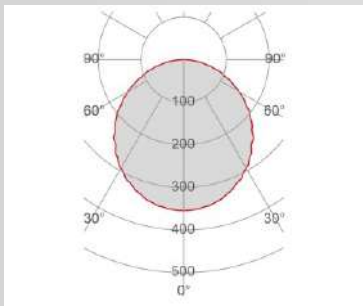

<i>Electrical part</i>	021.792.100
<i>Power</i>	26W
<i>Light Output</i>	3000lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	90
<i>Lamp Light Output</i>	60%
<i>Light Output of the lamp</i>	1800lm
<i>Beam Angle</i>	110°
<i>Beam Inclination</i>	0°

<i>Illuminance</i>	1m	637lux
	2m	159lux
	3m	71lux
	4m	40lux
	5m	25lux


## FOTOMETRICDATA P004C-00:

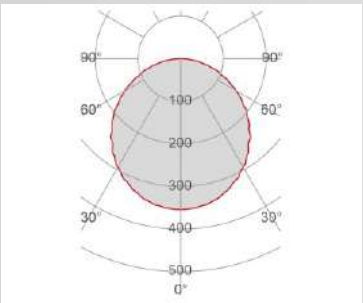

<i>Electrical part</i>	021.792.200
<i>Power</i>	52W
<i>Light Output</i>	6000lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	90
<i>Lamp Light Output</i>	60%
<i>Light Output of the lamp</i>	3600lm
<i>Beam Angle</i>	110°
<i>Beam Inclination</i>	0°

<i>Illuminance</i>	1m	1274lux
	2m	319lux
	3m	142lux
	4m	80lux
	5m	51lux

## FOTOMETRICDATA P004D-00:

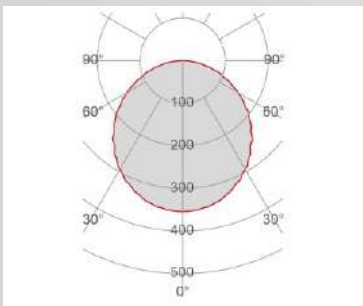


<i>Electrical part</i>	021.792.300
<i>Power</i>	78W
<i>Light Output</i>	9000lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	90
<i>Lamp Light Output</i>	60%
<i>Light Output of the lamp</i>	5400lm
<i>Beam Angle</i>	110°
<i>Beam Inclination</i>	0°


<i>Illuminance</i>	1m	1912lux
	2m	478lux
	3m	212lux
	4m	119lux
	5m	76lux

## ACCESSORIES:

### LED strip




Code	021.793
Power	10W/m
Tension	24Vdc
Flux	1150lm/m
Colour Temperature	3000°K
CRI	90
led/m	224



Code	021.790
Power	15W/m
Tension	24Vdc
Flux	1400lm/m
Colour Temperature	3000°K
CRI	90
led/m	140



Code	021.791
Power	18W/m
Tension	24Vdc
Flux	2000lm/m
Colour Temperature	3000°K
CRI	90
led/m	224




Code	021.792
Power	26W/m
Tension	24Vdc
Flux	3000lm/m
Colour Temperature	3000°K
CRI	90
led/m	224




Code	021.794
Power	20W/m
Tension	24Vdc
Flux	1800-2000lm/m
Colour Temperature	2700K-6000K
CRI	85
led/m	160

**OTHER ACCESSORIES**

Other Accessories

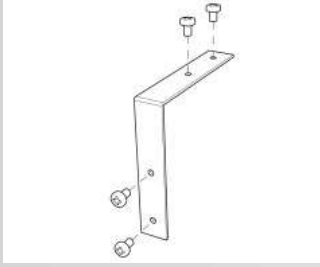


Code 023.704  
Description Wall/Ceiling connection  
Notes

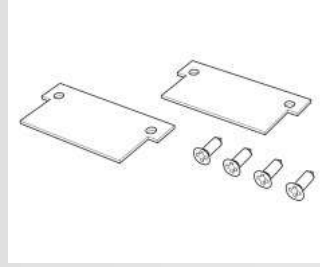


Code P001.KIT01  
Description Couple of end caps  
Notes




Code 029.009.100  
Description Replacement opal cover  
Notes L 1000mm




Code TGA  
Description Cut to size  
Notes (45°-90°)

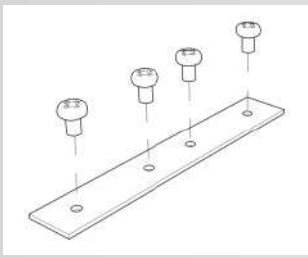


Code 023.700  
Description Linear connection  
Notes

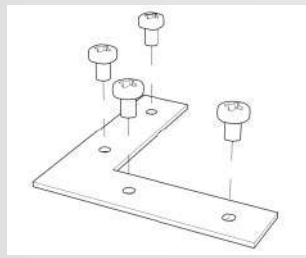

Code 023.701  
Description L connection  
Notes

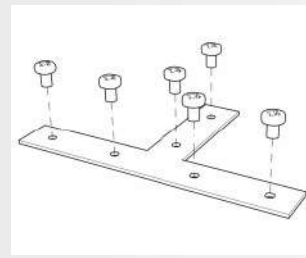

Code 023.702  
Description T connection  
Notes

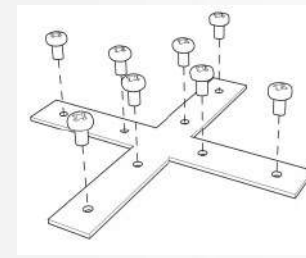

Code 023.703  
Description X connection  
Notes