



Req. space behind
the plasterboard


30mm(1,18")




hole on the plasterboard:
-P005B 53x1025 ±10mm
(2,08"x40,35"±0,39")
-P005C 60x2025 ±10mm
(2,08"x79,72"±0,39")
-P005D 60x3020 ±10mm
(2,08"x118,89"±0,39")



External measures
-P005B 115x1020 ±10mm
(4,52"x40,15"±0,39")
-P005C 115x2020 ±10mm
(4,52"x79,52"±0,39")
-P005D 115x3020 ±10mm
(4,52"x118,89"±0,39")



Measures of the light
output
-P005B 50x1020 ±10mm
(1,96"x40,15"±0,39")
-P005C 50x1020 ±10mm
(1,96"x79,52"±0,39")
-P005D 50x3020 ±10mm
(1,96"x118,89"±0,39")



Height without
electrical part

35mm(1,37")

**PROFILES
P005**

Recessed Profile / ALUMITE
Surface finish : Matt RAL 9010 painted ALUMITE
Without electrical part

MODEL:

Product family PROFILES
Type Recessed Profile

MATERIAL/SURFACE FINISH:

Code 006A
Material ALUMITE
Surface finish Matt RAL 9010 painted ALUMITE

ELECTRICAL PART:

Code 00
Type Without electrical part

GENERAL DATA:

Weight [Kg] P005B/P005C/P005D
1.2/2.4/3.6
Cover METACRILATO OPALINO
Country of production MADE IN ITALY
Mounting instruction 025.481_9010_REV03

INSTALLATION

Multisize system No
Position Wall/Ceiling lighting


PACKAGING:

Type Brown carton tube
Measures AxBxH 120x120x1100mm(P005B)
120x120x2100mm(P005C)
120x120x3100mm(P005D)
Gross Weight [Kg] 1.5247(P005B) /3.0199(P005C) /
4.5151(P005D)
NO
Master carton
Quantity of articles
Measures AxBxH

General Notes:

- LED= MAX 30W/m
 - Included in the packaging of each profile:
 - ALUMITE® profile;
 - Screen in opal methacrylate;
- STRIP LED 9010 TO BE ORDERED SEPARATELY.


FOTOMETRIC DATA P005B-00:

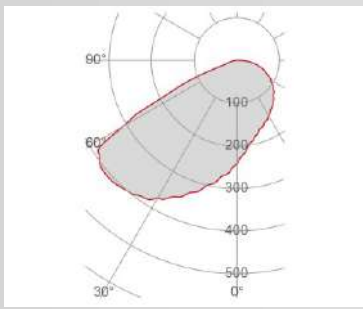

Electrical part	021.792.100
Power	26W
Light Output	3000lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	45%
Light Output of the lamp	1350lm
Beam Angle	71°
Beam Inclination	50°

Illuminance	0.3m	6300lux
	0.5m	2268lux
	1m	567lux


FOTOMETRICDATA P005C-00:

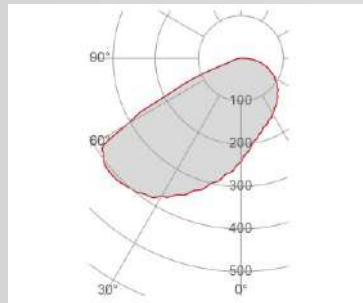

Electrical part	021.792.200
Power	52W
Light Output	6000lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	45%
Light Output of the lamp	2700lm
Beam Angle	71°
Beam Inclination	50°

Illuminance	0.3m	12600lux
	0.5m	4536lux
	1m	1134lux

FOTOMETRICDATA P005D-00:

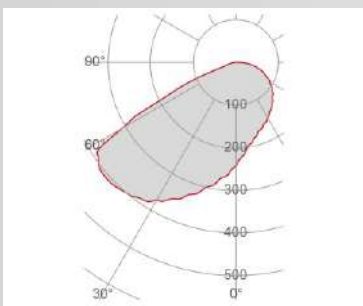


Electrical part	021.792.300
Power	78W
Light Output	9000lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	45%
Light Output of the lamp	4050lm
Beam Angle	71°
Beam Inclination	50°

Illuminance	0.3m	18900lux
	0.5m	6804lux
	1m	1701lux

ACCESSORIES:

LED strip



Code	021.793
Power	10W/m
Tension	24Vdc
Flux	1150lm/m
Colour Temperature	3000°K
CRI	90
led/m	224



Code	021.790
Power	15W/m
Tension	24Vdc
Flux	1400lm/m
Colour Temperature	3000°K
CRI	90
led/m	140



Code	021.791
Power	18W/m
Tension	24Vdc
Flux	2000lm/m
Colour Temperature	3000°K
CRI	90
led/m	224




Code	021.792
Power	26W/m
Tension	24Vdc
Flux	3000lm/m
Colour Temperature	3000°K
CRI	90
led/m	224




Code	021.794
Power	20W/m
Tension	24Vdc
Flux	1800-2000lm/m
Colour Temperature	2700K-6000K
CRI	85
led/m	160

OTHER ACCESSORIES


Other Accessories




Code 023.700
Description Linear connection
Notes



Code 023.701
Description L connection
Notes




Code 023.704
Description Wall/Ceiling connection
Notes




Code P005.KIT01
Description Couple of end caps
Notes


Other Accessories



Code 029.010.300
Description Replacement opal cover
Notes L 3000mm



Code TGA
Description Cut to size
Notes (45°-90°)



Code TGP
Description Custom Cut
Notes (different angles)