



Base:
-P009B 1020 ±10mm
(40,15"±0,39")
-P009C 2020 ±10mm
(79,52"±0,39")
-P009D 3020 ±10mm
(118,89"±0,39")



Height:
61mm
(2,40")



Depth:
45mm
(1,77")

PROFILES
P009

Recessed Profile / ALUMITE
Surface finish : ANODIZED GREY ALUMITE
Without electrical part

MODEL:

Product family PROFILES
Type Recessed Profile

MATERIAL/SURFACE FINISH:

Code 006B
Material ALUMITE
Surface finish ANODIZED GREY ALUMITE

ELECTRICAL PART:

Code 00
Type Without electrical part

GENERAL DATA:

P009B/P009C/P009D
Weight [Kg] 1.1/2/2.9
Cover METACRILATO OPALINO
Country of production MADE IN ITALY
Mounting instruction 025.572_9010

INSTALLATION

Multisize system No
Position Wall/Ceiling lighting


PACKAGING:

Type Brown carton tube
Measures AxBxH 90x90x1100mm(P009B)
90x90x2100mm(P009C)
90x90x3100mm(P009D)
Gross Weight [Kg] 1.2827(P009B) /2.3487(P009C)
/ 3.4148(P009D)
NO
Master carton
Quantity of articles
Measures AxBxH

General Notes:


- LED= MAX 2x26W/m
 - Included in the packaging of each profile:
- ALUMITE® grey anodized profile;
-Dual cover screen in opal methacrylate;
STRIP LED 9010 TO BE ORDERED SEPARATELY.

FOTOMETRIC DATA P009B-00

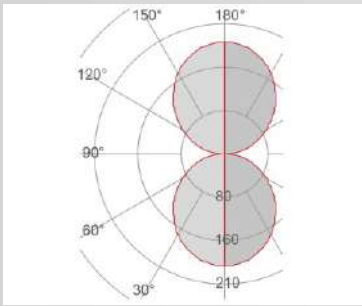


Electrical part	021.792.100
Power	26W
Light Output	3000lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	75%
Light Output of the lamp	2250lm
Beam Angle	111°/111°
Beam Inclination	

FOTOMETRIC DATA P009C-00:

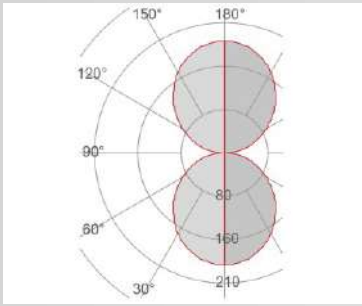

Electrical part	021.792.200
Power	52W
Light Output	6000lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	75%
Light Output of the lamp	4500lm
Beam Angle	111°/111°
Beam Inclination	


FOTOMETRIC DATA P009D-00:

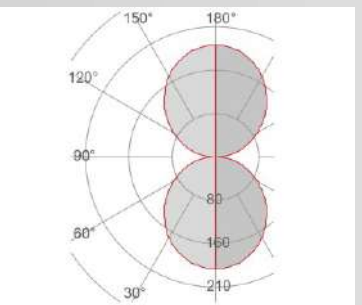

Electrical part	021.792.300
Power	78W
Light Output	9000lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	75%
Light Output of the lamp	6750lm
Beam Angle	111°/111°
Beam Inclination	

ACCESSORIES:

LED strip




Code	021.793
Power	10W/m
Tension	24Vdc
Flux	1150lm/m
Colour Temperature	3000°K
CRI	90
led/m	224



Code	021.790
Power	15W/m
Tension	24Vdc
Flux	1400lm/m
Colour Temperature	3000°K
CRI	90
led/m	140



Code	021.791
Power	18W/m
Tension	24Vdc
Flux	2000lm/m
Colour Temperature	3000°K
CRI	90
led/m	224




Code	021.792
Power	26W/m
Tension	24Vdc
Flux	3000lm/m
Colour Temperature	3000°K
CRI	90
led/m	224




Code	021.794
Power	20W/m
Tension	24Vdc
Flux	1800-2000lm/m
Colour Temperature	2700K-6000K
CRI	85
led/m	160

OTHER ACCESSORIES


Other Accessories

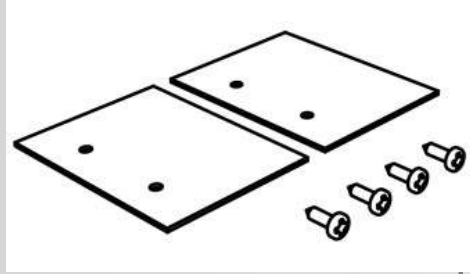


Code P009.KIT01
Description Couple of end caps
Notes



Code P009B.KIT02
Description profilo ad "U" per fissagg
Notes L 1000mm




Code P009B.KIT03
Description profilo ad "L" per fissagg
Notes L 1000mm



Code 029.012.100
Description Replacement opal co
Notes L 1000mm


Other Accessories




Code TGA
Description Cut to size
Notes (45°-90°)



Code TGP
Description Custom Cut
Notes (different angles)



Code 026.267
Description DRIVER ON/OFF SLIM m
Notes

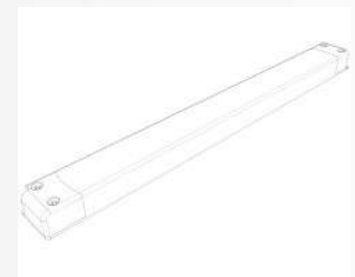

Code 026.268
Description DRIVER ON/OFF SLIM
Notes