





Type A




Type B




hole on the plasterboard:
 -P012B 18x1020 ±10mm
 (0,70"x40,15"±0,39")
 -P012C 18x2020 ±10mm
 (0,70"x79,52"±0,39")
 -P012D 18x3020 ±10mm
 (0,70"x118,89"±0,39")




External measures:
 -P012B 68x1020 ±10mm
 (2,67"x40,15"±0,39")
 -P012C 68x2020 ±10mm
 (2,67"x79,52"±0,39")
 -P012D 68x3020 ±10mm
 (2,67"x118,89"±0,39")



Measures of the light output:
 -P012B-00-A 15x1020 ±10mm
 (0,59"x40,15"±0,39")
 -P012B-00-B 22x1020 ±10mm
 (0,86"x40,15"±0,39")
 -P012C-00-A 15x2020 ±10mm
 (0,59"x79,52"±0,39")
 -P012C-00-B 22x2020 ±10mm
 (0,86"x79,52"±0,39")
 -P012D-00-A 15x3020 ±10mm
 (0,59"x118,89±0,39")
 -P012D-00-B 22x3020 ±10mm
 (0,86"x118,89±0,39")



Height without electrical part:
13.7mm(0,53")



Height including the electrical part:
13.7mm(0,53")

General Notes:

- LED= MAX 18W/m
 - Included in the packaging of each profile:
 - ALUMITE® profile;
 - Dual Cover screen:
 - A) Disposable screen for the installation
 - B) opal methacrylate screen;
- STRIP LED 9010 TO BE ORDERED SEPARATELY.

**PROFILES
P012**

Recessed Profile / ALUMITE
 Surface finish : ALUMITE
 Without electrical part

MODEL:

Product family PROFILES
 Type Recessed Profile

MATERIAL/SURFACE FINISH:

Code 006
 Material ALUMITE
 Surface finish ALUMITE

CODE	TYPE	DESCRIPTION
	TYPE A	Quick recessing system
P012B-00-A		L 1020±10mm – Without electrical part
P012C-00-A		L 2020±10mm – Without electrical part
P012D-00-A		L 3020±10mm – Without electrical part
	TYPE B	Quick recessing system (Plaster finish is not required)
P012B-00-B		L 1020±10mm – Without electrical part
P012C-00-B		L 2020±10mm – Without electrical part
P012D-00-B		L 3020±10mm – Without electrical part

GENERAL DATA: P012B/P012C/P012D

Weight [Kg] 0.37/0.74/1.11
 Cover METACRILATO OPALINO
 Country of production MADE IN ITALY
 Mounting instruction 025.601_9010


INSTALLATION

Multisize system No
 Position Wall/Ceiling lighting

PACKAGING:

Type Brown carton tube
 Measures AxBxH 90x90x1100mm(P012B)
 90x90x2100mm(P012C)
 90x90x3100mm(P012D)
 Gross Weight [Kg] 0.5527(P012B)
 1.0887(P012C)
 1.6248(P012D)
 Master carton NO
 Quantity of articles
 Measures AxBxH


FOTOMETRIC DATA P012B-00-A/P012 B-00-B

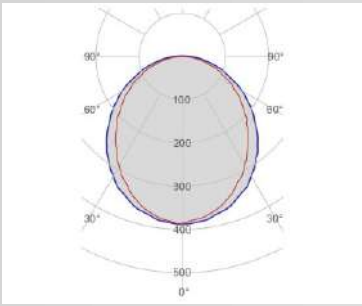

Electrical part	021.791.100
Power	18W
Light Output	2000lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	58%
Light Output of the lamp	1160lm
Beam Angle	95°
Beam Inclination	

Illuminance	1m	448lux
	2m	112lux
	3m	50lux
	4m	28lux
	5m	18lux


FOTOMETRIC DATA P0012C-00-A/P012C-00-B

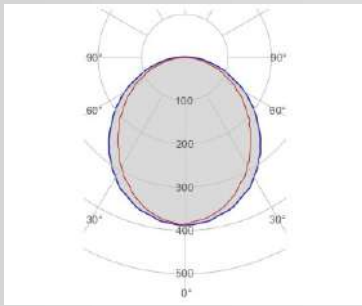

Electrical part	021.791.200
Power	36W
Light Output	4000lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	58%
Light Output of the lamp	2320lm
Beam Angle	95°
Beam Inclination	

Illuminance	1m	896lux
	2m	224lux
	3m	100lux
	4m	56lux
	5m	36lux

FOTOMETRIC DATA P012D-00-A/P012D-00-B:

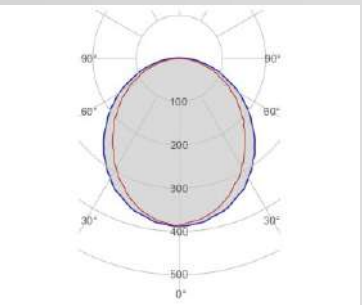


Electrical part	021.791.300
Power	54W
Light Output	6000lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	58%
Light Output of the lamp	3480lm
Beam Angle	95°
Beam Inclination	

Illuminance	1m	1343lux
	2m	336lux
	3m	149lux
	4m	84lux
	5m	54lux

ACCESSORIES:


LED strip



Code 021.793
Power 10W/m
Tension 24Vdc
Flux 1150lm/m
Colour Temperature 3000°K
CRI 90
led/m 224




Code 021.790
Power 15W/m
Tension 24Vdc
Flux 1400lm/m
Colour Temperature 3000°K
CRI 90
led/m 140




Code 021.791
Power 18W/m
Tension 24Vdc
Flux 2000lm/m
Colour Temperature 3000°K
CRI 90
led/m 224


Other Accessories




Code P012.KIT01
Description Couple of end caps
Notes




Code 029.010.100
Description Replacement opal cover
Notes L 1000mm



Code 029.017.100
Description Replacement opal cover
Notes L 1000mm



Code TGA
Description Cut to size
Notes (45°-90°)



Code TGP
Description Custom Cut
Notes (different angles)