



hole on the plasterboard:
-P015B 21x1020 ±10mm
(0,82x40,15"±0,39")
-P015C 21x2020 ±10mm
(0,82x79,52"±0,39")
-P015D 21x3020 ±10mm
(0,82x118,89"±0,39")




External measures
-P001B 41x1020 ±10mm
(1,61"x40,15"±0,39")
-P001C 41x2020 ±10mm
(1,61"x79,52"±0,39")
-P001D 41x3020 ±10mm
(1,61"x118,89"±0,39")



Measures of the
light output
-P001B 15x1020 ±10mm
(0,59"x40,15"±0,39")
-P001C 15x1020 ±10mm
(0,59"x79,52"±0,39")
-P001D 15x3020 ±10mm
(0,59"x118,89"±0,39")



Height without electrical part:
13.7mm(0,53")



Height without electrical part:
13.7mm(0,53")

**PROFILES
P015**

Recessed Profile / ALUMITE
Surface finish : ALUMITE GLAZED RAL 9010 MATT
Without electrical part

MODEL:

Product family PROFILES
Type Recessed Profile

MATERIAL/SURFACE FINISH:

Code 006A
Material ALUMITE
Surface finish ALUMITE GLAZED RAL 9010 MATT

ELECTRICAL PART:

Code 00
Type Without electrical part

GENERAL DATA:

P015B/P015C/P015D
Weight [Kg] 0.16/0.32/0.48
Cover
Country of production MADE IN ITALY
Mounting instruction 025.602_9010

INSTALLATION

Multisize system No
Position Wall/Ceiling lighting


PACKAGING:

Type Brown carton tube
Measures AxBxH 90x90x1100mm(P015B)
90x90x2100mm(P015C)
90x90x3100mm(P015D)
Gross Weight [Kg] 0.3427(P015B)
0.6687(P015C)
0.9948(P015D)
Master carton NO
Quantity of articles
Measures AxBxH

General Notes:


- LED= MAX 10W/m
- Included in the packaging of each profile:
- ALUMITE® profile painted ral 9010 matt;;
STRIP LED 9010 TO BE ORDERED SEPARATELY.

FOTOMETRIC DATA P001B-00:

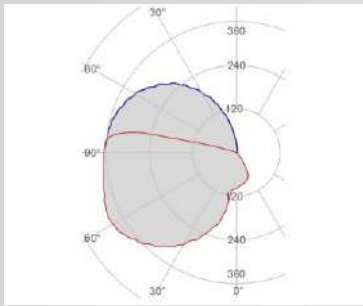


<i>Electrical part</i>	021.793.100
<i>Power</i>	10W
<i>Light Output</i>	1150lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	90
<i>Lamp Light Output</i>	90%
<i>Light Output of the lamp</i>	1035lm
<i>Beam Angle</i>	/
<i>Beam Inclination</i>	

FOTOMETRIC DATA P001C-00:

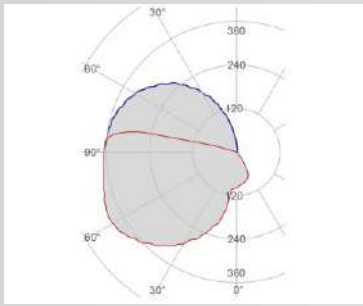

<i>Electrical part</i>	021.793.200
<i>Power</i>	20W
<i>Light Output</i>	2300lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	90
<i>Lamp Light Output</i>	90%
<i>Light Output of the lamp</i>	2070lm
<i>Beam Angle</i>	/
<i>Beam Inclination</i>	

FOTOMETRIC DATA P001D-00:

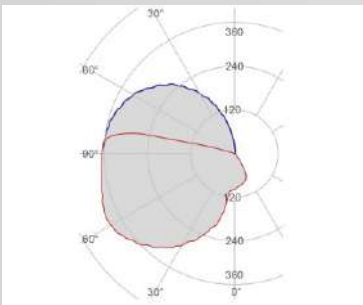

<i>Electrical part</i>	021.793.300
<i>Power</i>	30W
<i>Light Output</i>	3450lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	90
<i>Lamp Light Output</i>	90%
<i>Light Output of the lamp</i>	3105lm
<i>Beam Angle</i>	/
<i>Beam Inclination</i>	


ACCESSORIES:

LED strip



<i>Code</i>	021.793
<i>Power</i>	10W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	1150lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	90
<i>led/m</i>	224

Other Accessories



<i>Code</i>	TGA
<i>Description</i>	Cut to size
<i>Notes</i>	(45°-90°)



<i>Code</i>	TGP
<i>Description</i>	Custom Cut
<i>Notes</i>	(different angles)