




Req. space behind the
plasterboard:
70mm
(2,75")




hole on the plasterboard
120x110mm
(4,72"x4,33")




External measures
115x105mm
(4,52"x4,13")



Measures of the light output
20mm x 20mm
(0,78" x 0,78")



Height without electrical
part
40mm
(1,57")



Height including the
electrical part:
65mm
(2,55")

General notes:

4202

Recessed Spotlight / CRISTALY
Surface finish : CRISTALY

MODEL:

Code 4202
Product family PATHMARKERS
Type Recessed Spotlight

MATERIAL/SURFACE FINISH:

Code 004
Material CRISTALY
Surface finish CRISTALY

CODE ELECTRICAL PART

4202-2700	LED 2W / 24Vdc / 190lm / 2700°K / CRI90
4202-3000	LED 2W / 24Vdc / 200lm / 3000°K / CRI90
4202-4000	LED 2W / 24Vdc / 210lm / 4000°K / CRI90

GENERAL DATA:

Dimmable	Yes
Power Supply	by Remote Power Supply
Connection	2 PVC cables
Protection Index	IP20
Isolation Class	III
Weight [Kg]	0,35
Country of production	MADE IN ITALY
Mounting instruction	025.416_9010_REV03


INSTALLATION

Multisize system	YES
Position	Wall pathmarker

PACKAGING:

Type	White die-cut Box
Measures AxBxH	165x165x116mm
Gross Weight [Kg]	0.4147
Master carton	NO


FOTOMETRIC DATA 4202-2700:

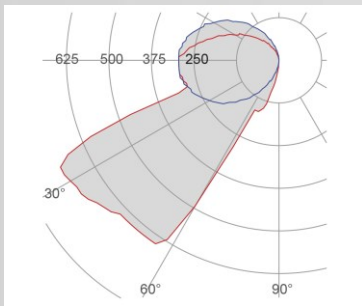

Electrical part	2700_A
Power	2W
Light Output	190lm
Colour Temperature	2700°K
CRI	90
Lamp Light Output	48%
Light Output of the lamp	91.2lm
Beam Angle	42°
Beam Inclination	50°

Illuminance	0.3m	725lux
	0.5m	261lux
	1m	65lux


FOTOMETRICDATA 4202-3000:

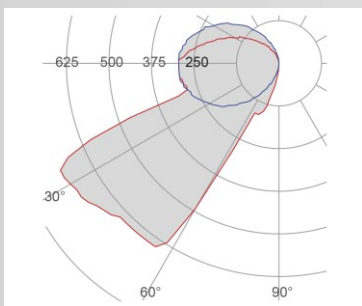

Electrical part	3000_A
Power	2W
Light Output	200lm
Colour Temperature	3000°K
CRI	90
Lamp Light Output	48%
Light Output of the lamp	96lm
Beam Angle	42°
Beam Inclination	50°

Illuminance	0.3m	763lux
	0.5m	275lux
	1m	69lux

FOTOMETRICDATA 4202-4000:

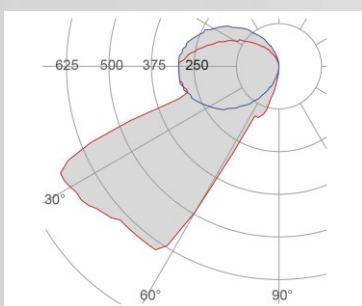


Electrical part	4000_A
Power	2W
Light Output	210lm
Colour Temperature	4000°K
CRI	90
Lamp Light Output	48%
Light Output of the lamp	100.8lm
Beam Angle	42°
Beam Inclination	50°

Illuminance	0.3m	801lux
	0.5m	288lux
	1m	72lux


ACCESSORIES

Housing Box for Brickwork




Code 023.411
Measures 105X115X70mm
Measures of the hole 135X145X80mm

Other Accessories




Code 099.142
Description Emergency Kit
Notes


Standard Power Supply



Code 026.258
Measures 130x42x23mm
Power 12W
Input 110-277V~W
Output 24Vdc




Code 026.259
Measures 167x45x30mm
Power 36W
Input 110-277V~W
Output 24Vdc




Code 026.260
Measures 157x54x36mm
Power 60W
Input 110-277V~W
Output 24Vdc

Dimmable Power Supply



Code 026.219
Measures 155x51x26mm
Power 21.6W
Input 110-277V~W
Output 24Vdc
Dimmable PUSH/0-10V/DALI



Code 026.209
Measures 125x82x29mm
Power 60W
Input 110-277V~W
Output 24Vdc
Dimmable PUSH/1-10V