

BYIBA
L I G H T



BIG G
(cylinders)

BY-1001-CL

PROJECT

SPEC TYPE

NOTES



LED



IP20



GENERAL INFORMATION:

The Znow cylinders collection offers a sleek, modern design with six surface-mounted lighting models crafted from high-quality metal, available in various sizes. Choose from a vibrant palette of finishes, including Black, White, Gold, and more. The collection supports LED or GU10 light sources, with options for different wattages and color temperatures (2700K, 3000K, 4000K). Dimming options include Non-Dimmable and 0-10V. Suitable for indoor environments, this ETL-certified collection is perfect for adding a touch of minimalist elegance to contemporary spaces.

MATERIAL

Acryl and metal

HOUSING FINISHES:

Silver, Black, White, Bronze, Champagne and Custom on request

SHADE FINISHES:

Clear, Frosted, Bubble Acrylic

LIGHT SOURCE

LED / 12W / 350mA / 1450lm / 82 CRI

VOLTAGE:

110-277V

DRIVER POSITION:

Remove

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

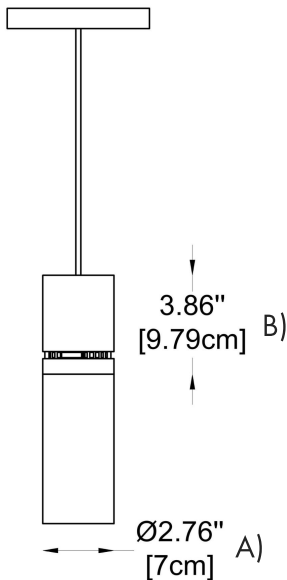

HOW TO ORDER:

CODE:

Example:
CODE: BY-1001-CL-01-CR-WH-K30-CS-DIM-IP20

BY-1001-CL-01-
CR-WH-K30-CS-
DIM-IP20

1 GENERAL DIMENSIONS:

A) Diameter - Ø: 2.75" (7 cm)
B) Height of LED housing - H: 3.85" (10.75 cm)

2 SIZE OF THE LENS:

-01	H: 2"	-06	H: 12"
-02	H: 4"	-07	H: 14"
-03	H: 6"	-08	H: 16"
-04	H: 8"	-09	H: 18"
-05	H: 10"	-10	H: 24"

-CUS* Custom on request*

3 TYPE OF SHADE:

- CR Clear
- FR Frosted
- BA Bubble Acrylic

4 LED HOUSING FINISHES

- WH White
- BL Black
- BR Bronze
- SL Silver
- CH Champagne
- CUS Custom on request*

5 CCT:

- K27 2700K
- K30 3000K
- K35 3500K
- K40 4000K
- RGB RGB

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



CONTACT US:


sales@gordonbullard.com
www.byiba.com
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS

PROJECT

SPEC TYPE

NOTES

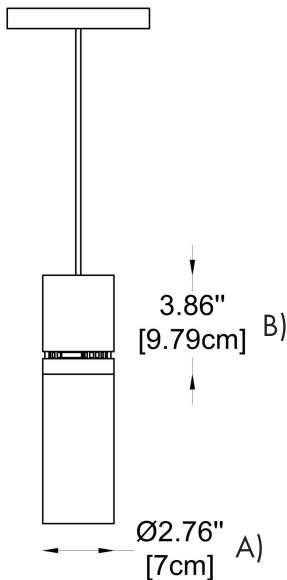

HOW TO ORDER:

CODE:

Example:
CODE: BY-1001-CL-01-CR-WH-K30-CS-DIM-IP20

BY-1001-CL-01-
CR-WH-K30-CS-
DIM-IP20

6 TYPE OF INSTALLATION:

- CS Cable Suspension
- SS Stem Suspension
- SM Surface-mounted
- CM Catenary-mounted
- RD Recessed

Cable suspension will include standard field-cutable 60" suspension cable. For longer lengths, please consult BYIBA. (Please proceed with caution with field-cutting cable). *

7 STEM SUSPENSION LENGTHS:

- L6 L: 6"
- L12 L: 12"
- L18 L: 18"
- L24 L: 24"
- L30 L: 30"
- L36 L: 36"

Only for STEM SUSPENSION type of installation*

8 DIMMING OPTIONS:

- NON Non-Dimmable
- DIM 0-10V

9 IP RAITING:

- IP20 IP20 - Indoor
- IP65 IP65 - Outdoor