



**CATEGORY:**

Indoor, Suspension or Surface Mount, Damp Location

**MATERIALS:**


Aluminium, Polycarbonate

**FEATURES:**

- Available in standard light, acoustic w/light or acoustic only (no light)
- 3 color finishes (black, white, silver), can be customized.
- 35 acoustic felt colors
- Operation Voltage: AC120-277V;
- 0-10v dimming and non-dimmable options
- Direct and indirect lighting options
- Efficiency: >85lm/w
- PC, UL-94VO, Anti-UV lens
- Samsung 2835, 9V, 100mA LED System
- CCT: 2700K, 3000K, 3500K, 4000K and 5000K with a great color consistency (within 3-step MacAdam ellipse)

**DIMENSIONS AND MODELS:**

MODEL NUMBER	DIMENSION				DIMENSION CODE
	A	B	L	H	
LL0186S-25W	16.4"(416mm)	18.9"(480mm)	9.45"(240mm)	3.1"(80mm)	S
LL0186S-40W	20.5"(520mm)	23.6"(600mm)	11.8"(300mm)	3.1"(80mm)	M
LL0186S-90W	30.7"(780mm)	35.4"(900mm)	17.7"(450mm)	3.1"(80mm)	L
LL0186S-180W	40.9"(1038mm)	47.2"(1200mm)	23.6"(600mm)	3.1"(80mm)	XL

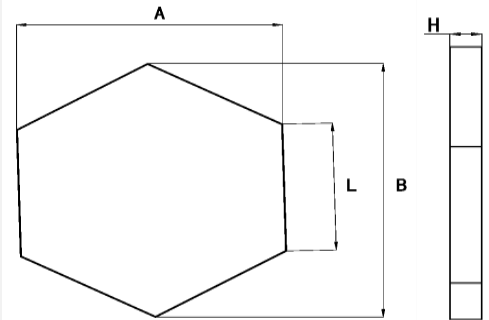


Ordering Format	Model No.	Distribution	Installation	Acoustic Configuration	Power	CRI	CCT		Control		Body Color		Size
		LL0186	Blank down	S suspended	Blank no acoustic	25W	80+	30K	3000K	STD	non-dimming	SW	matt white
	UD Up and down		M surface mounted	AC Acoustic only	40W	90+	40K	4000K	DIM	0-10V dimming	SB	matt black	M
					50W		50K	5000K			RAL	customized color	L
					80W								XL
					90W								
					120W								
					180W								
					220W								
Order Example:	LL0186S-25W-80-30K-DIM--SW-S												

## ACOUSTIC COLORS:



## LIGHT DISTRIBUTION

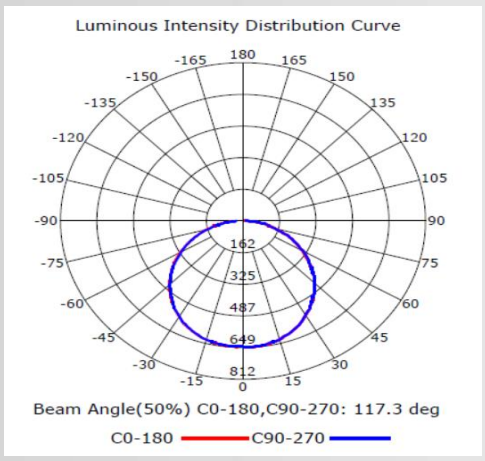

## OPTICAL SYSTEM

