



**CATEGORY:**

Indoor, Suspension or Surface Mount, Damp Location

**MATERIALS:**


Aluminum, PMMA

**FEATURES:**

- Available in standard light, acoustic w/light or acoustic only (no light)
- 3 color finishes (black, white, silver), can be customized.
- 35 acoustic felt colors
- Operation Voltage: AC120-277V;
- 0-10v dimming and non-dimmable options
- Efficiency: >70lm/w
- PMMA, UL-94VO, Anti-UV lens
- Samsung 2835, 3V, 150mA LED System
- CCT: 2700K, 3000K, 3500K, 4000K and 5000K with a great color consistency (within 3-step MacAdam ellipse)
- Standard safe cable length: 5ft (can be customized).


**DIMENSIONS OF SURFACE-MOUNTED MODELS:**

MODEL NUMBER	DIMENSION		DIMENSION CODE
	D	H	
LL0201M-15W	14.2"(360mm)	4.6"(115mm)	S
LL0201M-25W	17.7"(450mm)	4.6"(115mm)	M
LL0201M-36W	23.6"(600mm)	4.6"(115mm)	L
LL0201M-50W	31.5"(800mm)	4.6"(115mm)	XL

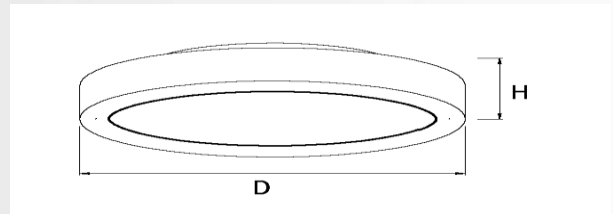

**DIMENSIONS OF SUSPENDED MODELS:**


MODEL NUMBER	DIMENSION				DIMENSION CODE
	D	H	A	B	
LL0201S-15W	14.2"(360mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	S
LL0201S-25W	17.7"(450mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	M
LL0201S-36W	23.6"(600mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	L
LL0201S-50W	31.5"(1200mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	XL

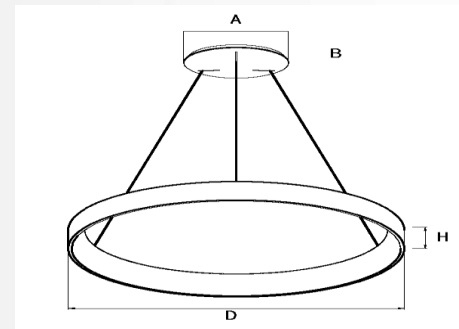


**ACOUSTIC COLORS:**



**LIGHT DISTRIBUTION**

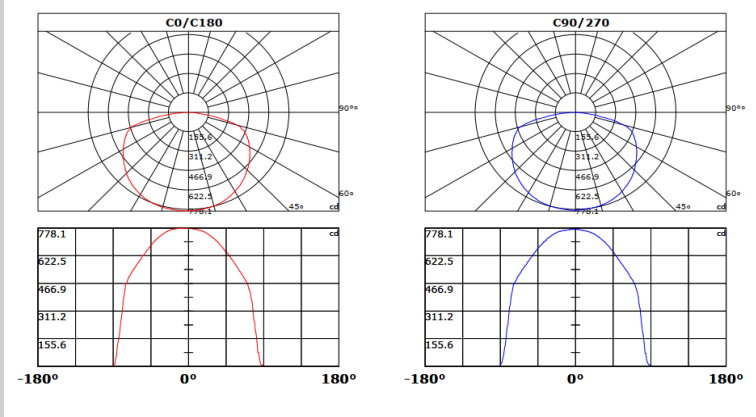

**OPTICAL SYSTEM**

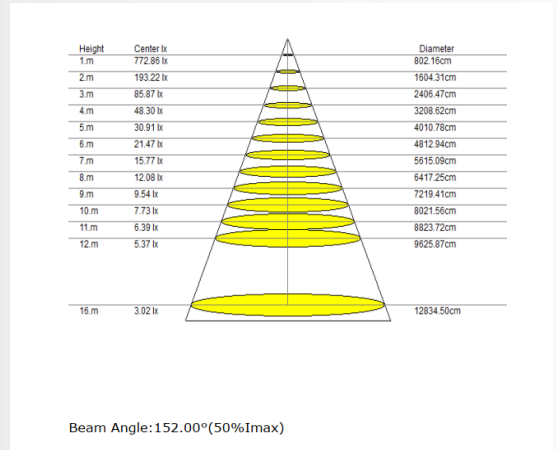

Ordering Format	Model No.	Installation		Acoustic Configuration	Power	CRI	CCT		Control		Body Color		Dimension (mm/inch)
	LL0201	<b>S</b>	suspended	<b>Blank</b> no acoustic	<b>15W</b>	<b>80+</b>	<b>30K</b>	3000K	<b>STD</b>	non-dimming	<b>SW</b>	matt white	<b>S</b>
		<b>M</b>	surface mounted	<b>AC</b> Acoustic only	<b>25W</b>	<b>90+</b>	<b>40K</b>	4000K	<b>DIM</b>	0-10V dimming	<b>SB</b>	matt black	<b>M</b>
				<b>ACLT</b> Acoustic with Light	<b>36W</b>		<b>50K</b>	5000K			<b>RAL</b>	customized color	<b>XL</b>
				<b>50W</b>									

**Order Example:** LL0201S-15W-80-30-DIM--SW-S