

CATEGORY:

Indoor, Suspension or Surface Mount, Damp Location

MATERIALS:


Aluminum, PMMA

FEATURES:

- Available in standard light, acoustic w/light or acoustic only (no light)
- 3 color finishes (black, white, silver), can be customized.
- 35 acoustic felt colors
- Operation Voltage: AC120-277V;
- 0-10v dimming and non-dimmable options
- Efficiency: >70lm/w
- PMMA, UL-94VO, Anti-UV lens
- Samsung 2835, 3V, 150mA LED System
- CCT: 2700K, 3000K, 3500K, 4000K and 5000K with a great color consistency (within 3-step MacAdam ellipse)
- Standard safe cable length: 5ft (can be customized).


DIMENSIONS OF SURFACE-MOUNTED MODELS:

MODEL NUMBER	DIMENSION			DIMENSION CODE
	D	W	H	
LL020115M-15W	14.2"(360mm)	14.2"(360mm)	4.6"(115mm)	S
LL020125M-25W	17.7"(450mm)	17.7"(450mm)	4.6"(115mm)	M
LL020136M-36W	23.6"(600mm)	23.6"(600mm)	4.6"(115mm)	L
LL020150M-50W	31.5"(800mm)	31.5"(800mm)	4.6"(115mm)	XL

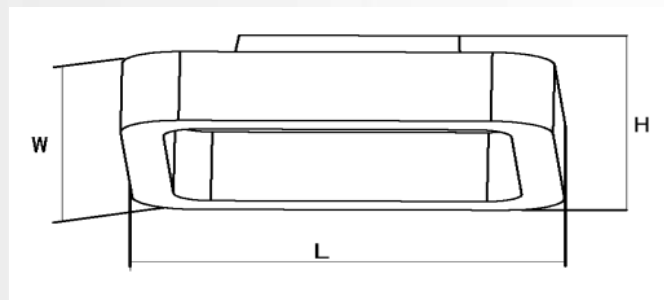

DIMENSIONS OF SUSPENDED MODELS:


MODEL NUMBER	DIMENSION				DIMENSION CODE
	D	H	A	B	
LL020115S-15W	14.2"(360mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	S
LL020125S-25W	17.7"(450mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	M
LL020136S-36W	23.6"(600mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	L
LL020150S-50W	31.5"(1200mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	XL

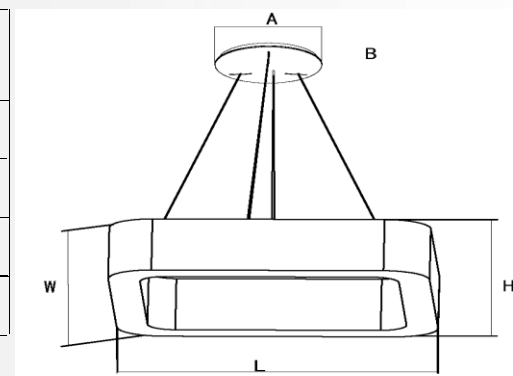


ACOUSTIC COLORS:



LIGHT DISTRIBUTION

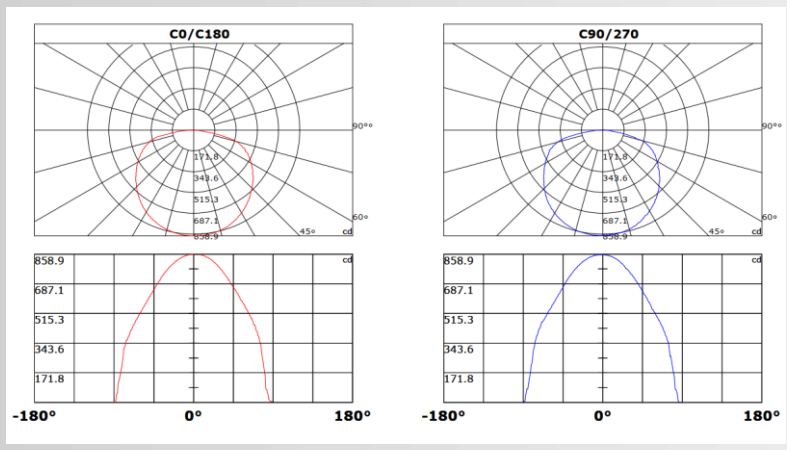

OPTICAL SYSTEM

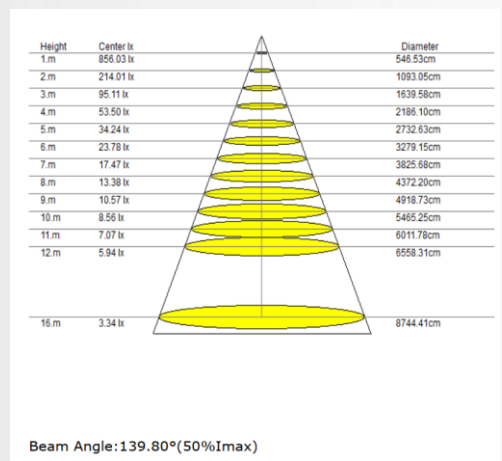

Ordering Format	Model No.	Installation	Acoustic Configuration	Power	CRI	CCT		Control		Body Color		Dimension (mm/inch)	
	LL0202	S	suspended	Blank no acoustic	15W	80+	30K	3000K	STD	non-dimming	SW	matt white	S
		M	surface mounted	AC Acoustic only	25W	90+	40K	4000K	DIM	0-10V dimming	SB	matt black	M
				ACLT Acoustic with Light	36W		50K	5000K			RAL	customized color	XL
				50W									

Order Example: LL0202S-15W-80-30-DIM--SW-S