BYIBA LIGHT

PENDANT BGB-9011D

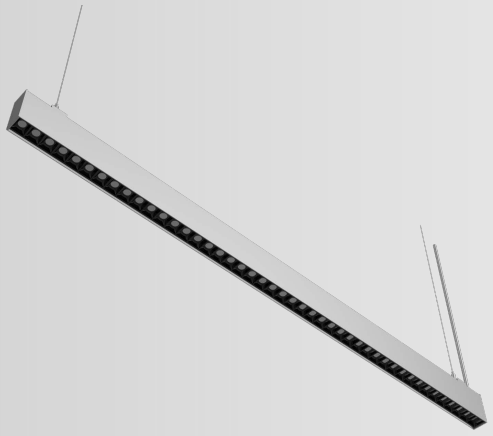

CATEGORY:

Indoor, Suspension,Surface mounted

MATERIALS:

Aluminum + Lens

FEATURES:

-Distinctively rectangular aluminum luminaire housing from 1.3mm extruded aluminum profile
-Class Two driver with AC110-277v
-High efficacy LEDs with 3 years warranty
-No flicker, low glare
-Available with Dali, 0-10V, ON/OFF dimming control
-Emergency and microwave sensor functions are available

DIMENSIONS:

Model	Length	Power	Efficacy	Flux
BGB-9011D-20W	600mm(2ft)	15W	120lm/W	1800lm
BGB-9011D-40W	1200mm(4ft)	25W	120lm/W	3000lm
BGB-9011D-80W	2400mm(8ft)	50W	120lm/W	6000lm

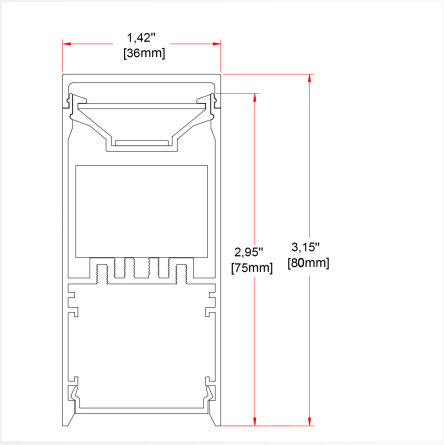

HOW TO ORDER:

	Model No.	Power	Installation		Control		CRI	CCT		Body Color		Other Functions	
Ordering Format	BGB-9011D	15W	S	suspended	STD	non-dimming	80+	30K	3000K	SW	white	EM	emergency
		25W			01	0-10V dimming		40K	4000K	SB	black	MW	microwave sensor
		50W	M	surface	02	DALI dimming		50K	5000K	RAL	customized color		
					00	ON/OFF		65K	6500K				
Order Example:	BGB-9011D-15W-S-01-80-40K-SB-EM												

g@gordonbullard.com
www.byiba.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

BYIBA
LIGHT

PENDANT BGB-9011D

PERFORMANCE

Item	Technical Data
Driver	Class Two
Size(W x H)	36 x75mm
Input Voltage	AC110-270v
Input Frequency	50/60Hz
Power Factor	≥0.9
Light Source	SMD2835
Color Temperature	3000K/4000K/5000K/6500K
Color Rendering Index	> 80
Beam Angle(50%)	110°
IP Grade	IP20
Material	6063 Aluminum + Lens
Warranty	3 Years
Dimming	0-10v, DALI
Installation	Suspension, Surface mounted
Other Function	Emergency, Microwave Sensor

g@gordonbullard.com
www.byiba.com
1-877-964-4646
991 South Gull Lake Dr
Richland, MI 49083
USA