

CATEGORY:

Indoor, Suspension, Damp Location

MATERIALS:


Aluminum, PMMA

FEATURES:

- 3 sizes to choose from ranging from 23.6" x 23.6" up to 47.2" x 47.2"
- Comes in two standard finishes: Black, White, can be customized.
- Aluminum body construction
- Operation Voltage: AC120-277V;
- 0-10v dimming and non-dimmable options
- Efficiency: >105lm/w
- PMMA, UL-94VO, Anti-UV lens
- Samsung 2835, 3V, 150mA LED System
- CCT: 2700K, 3000K, 3500K, 4000K and 5000K with a great color consistency (within 3-step MacAdam ellipse)
- 4 different lighting distribution: indirect, inner and outer.

DIMENSIONS AND MODELS:

MODEL NUMBER	DIMENSION			DIMENSION CODE
	D	W	H	
LL0195S-40W	23.6"(600mm)	23.6"(600mm)	0.98"(25mm)	S
LL0195S-60W	35.4"(900mm)	35.4"(900mm)	0.98"(25mm)	M
LL0195S-80W	47.2"(1200mm)	47.2"(1200mm)	0.98"(25mm)	L

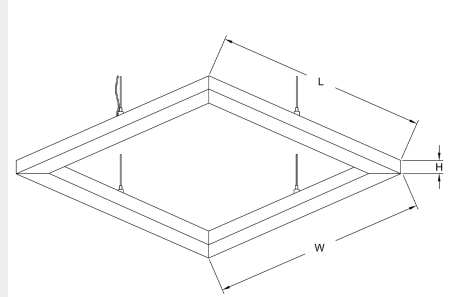


Ordering Format	Model No.	Installation	Power	Lighting Distribution	CRI	CCT		Control		Body Color		Dimension (mm/inch)	
	LL0195	S	suspended	40W	U:indirect	80+	30K	3000K	STD	non-dimming	SW	matt white	S
				60W	I:inner	90+	40K	4000K	DIM	0-10V dimming	SB	matt black	M
				80W	O:outer		50K	5000K			RAL	customized color	L
				D:direct									

Order Example:

LL0195S-U-40W-90-30-DIM--SW-S

LIGHT DISTRIBUTION

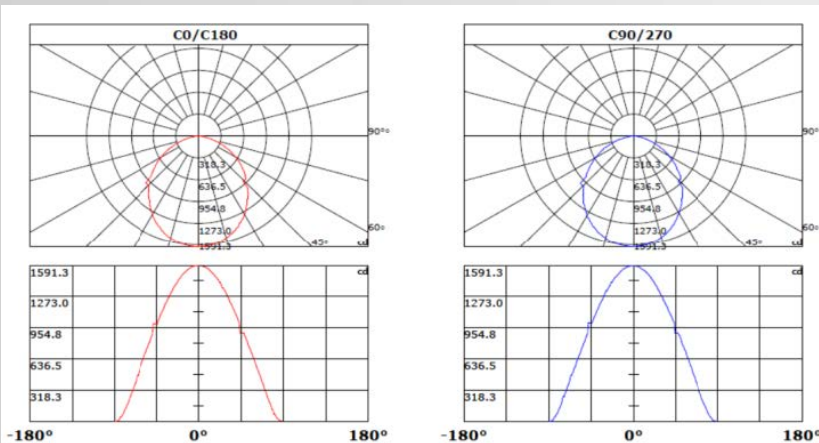

OPTICAL SYSTEM

