BYIBA
LIGHT

Designed by :
9010 it

IP 20
IP 44

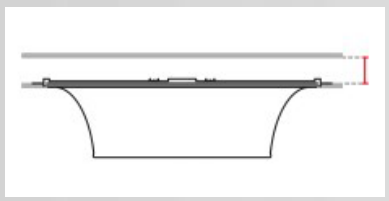

Req. space behing the plasterboard:

50mm(1,96")

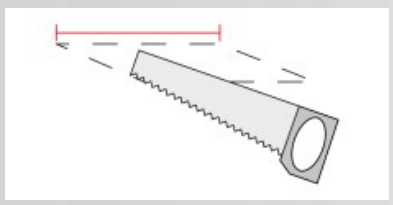

hole on the plasterboard

1000x1000mm
(39,37" x 39,37")

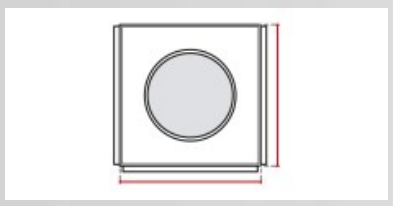

External measures

990x990mm
(38,97" x 38,97")

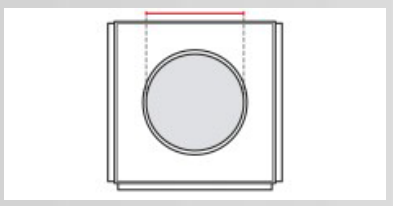

Measures of the light output

Ø600mm
(23,62")

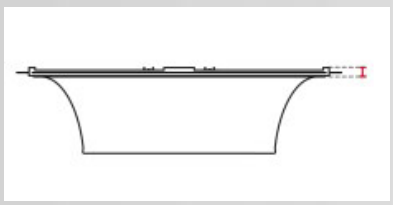

Height without electrical part
30mm
(1,18")

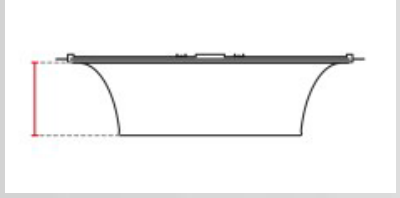

Height including the electrical part:
250mm
(9,84")

8935C

Recessed Spotlight / CRISTALY
Surface finish : CRISTALY

MODEL:

Code	8935C
Product family	CEILING RECESSED LIGHTING
Type	Recessed Spotlight

MATERIAL/SURFACE FINISH:

Code	004
Material	CRISTALY
Surface finish	CRISTALY

CODE	ELECTRICAL PART
8935C-2715	LED 88W-2x1050mA-9880lm-2700°K-CRI85
8935C-3015	LED 88W-2x1050mA-10400lm-3000°K-CRI85
8935C-4015	LED 88W-2x1050mA-11000lm-4000°K-CRI85

GENERAL DATA:

Light Output of the lamp	6916lm for code 8935C-2715 7280lm for code 8935C-3015 7700lm for code 8935C-4015
Protection Index	IP20-IP44
Isolation Class	III
Weight [Kg]	28.5
Country of production	MADE IN ITALY
Mounting instruction	025.504_9010_REV03
Power Supply	Power Supply in counterceiling 2
Connection	PVC cables
Cover	Etched Glass

INSTALLATION

Multisize system	YES
Position	Ceiling

PACKAGING:

Type	SCATOLA AMERICANA AVANA
Measures AxBxH	1210x1210x460mm
Gross Weight [Kg]	42.306
Master carton	NO
Quantity of articles	
Measures AxBxH	

General Notes:

- Designer amarantostudio

g@gordonbullard.com
www.byiba.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

BYİBA

LIGHT

Designed by :
9010 it

FOTOMETRIC DATA 8935C-2715:

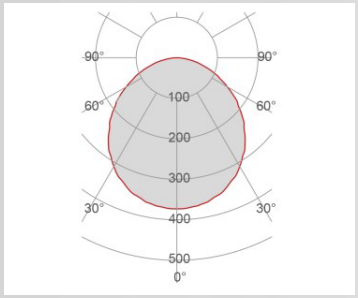

Electrical part	2715
Power	88W
Light Output	9880lm
Colour Temperature	2700°K
CRI	85
Lamp Light Output	70%
Light Output of the lamp	6916lm
Beam Angle	106°
Beam Inclination	0°

Illuminance	*1m*	*2580lux*
	2m	*645lux*
	3m	*287lux*
	4m	*161lux*
	5m	*103lux*

FOTOMETRICDATA 8935C-3015

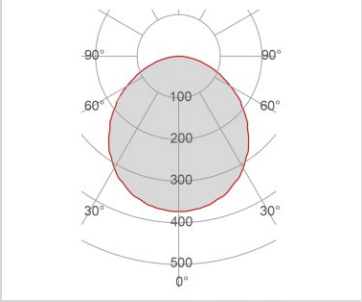

Electrical part	3015
Power	88W
Light Output	10400lm
Colour Temperature	3000°K
CRI	85
Lamp Light Output	70%
Light Output of the lamp	7280lm
Beam Angle	106°
Beam Inclination	0°

Illuminance	*1m*	*2715lux*
	2m	*679lux*
	3m	*302lux*
	4m	*170lux*
	5m	*109lux*

FOTOMETRICDATA 8935C-4015:

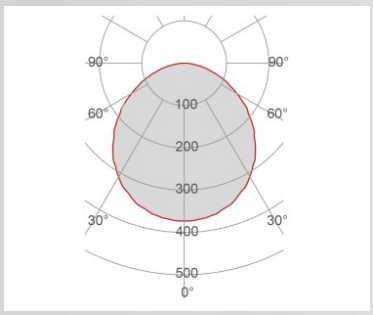

Electrical part	4015
Power	88W
Light Output	11000lm
Colour Temperature	4000°K
CRI	85
Lamp Light Output	70%
Light Output of the lamp	7700lm
Beam Angle	106°
Beam Inclination	0°

Illuminance	*1m*	*2872lux*
	2m	*718lux*
	3m	*319lux*
	4m	*180lux*
	5m	*115lux*

ACCESSORIES

Standard Power Supply



Code	2x026.205
Measures	128x60x31.5mm
Power	min35.7W max59.9W
Input	180-295V~W
Output	1050mA

Dimmable Power Supply



Code	2x026.206
Measures	124x82x23mm
Power	59.9W
Input	180-295V~
Output	W 1050mA
Dimmable	PUSH/DALI



Code	2x026.207
Measures	124x82x23mm
Power	59.9W
Input	180-295V~
Output	W 1050mA
Dimmable	0-10V

Dimmable Power Supply



Code	099.142
Description	Emergency Kit
Notes	

g@gordonbullard.com
www.byiba.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA