

MODEL:

5HFHVHVG6SRWOLKW,67\$<
6MIDFHILQLVK,67\$<

MATERIAL/SURFACE FINISH:

Code
Product family /,15(66(/,7,1*
Type 5HFHVHVG6SRWOLKW

GENERAL DATA:

Code
Material ,67\$<
Surface,67\$<
/(8YN"MNr.,
/(8YN"MNr.\$*
/(8YN"MNr.\$*

INSTALLATION

Multisize system 1R
Position ,LOLO,DLKWLOJ
Protection Index 11
:FT
1PS4VQQM,DPVOUFSDFM,OH
,DIFE(MBTT
Isolation Class ""
Weight [Kg]
Country of production MADE IN ITALY
Mounting instruction ,


PACKAGING:

Type White american Box
Measures AxBxH YNN
Gross Weight [Kg]
Master carton NO
Quantity of articles
Measures AxBxH

Notes




FOTOMETRIC DATA 4118-2715:

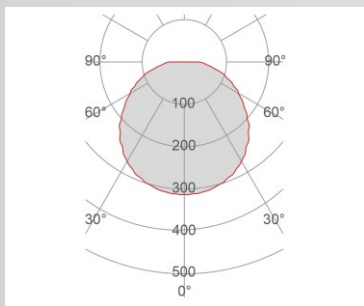

Electrical part	2715
Power	88W
Light Output	9880lm
Colour Temperature	2700°K
CRI	85
Lamp Light Output	72%
Light Output of the lamp	7113.6lm
Beam Angle	116°
Beam Inclination	0°

illuminance	1m	2227lux
	2m	557lux
	3m	247lux
	4m	139lux
	5m	89lux


FOTOMETRIC DATA 4118-3015:

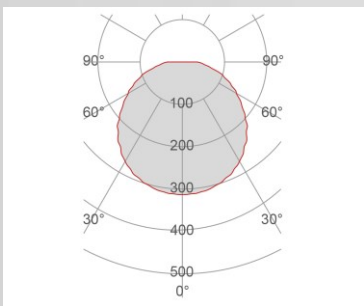

Electrical part	3015
Power	88W
Light Output	10400lm
Colour Temperature	3000°K
CRI	85
Lamp Light Output	72%
Light Output of the lamp	7488lm
Beam Angle	116°
Beam Inclination	0°

illuminance	1m	2344lux
	2m	586lux
	3m	260lux
	4m	146lux
	5m	94lux

FOTOMETRIC DATA 4118-4015:

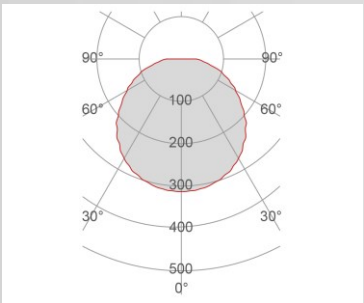


Electrical part	4015
Power	88W
Light Output	11000lm
Colour Temperature	4000°K
CRI	85
Lamp Light Output	72%
Light Output of the lamp	7920lm
Beam Angle	116°
Beam Inclination	0°

illuminance	1m	2479lux
	2m	620lux
	3m	275lux
	4m	155lux
	5m	99lux


ACCESSORIES

Standard Power Supply




Code	2x026.205
Measures	128x60x31.5mm
Power	min35.7W max59.9W
Input	180-295V~W
Output	1050mA

Dimmable Power Supply




Code	2x026.206
Measures	124x82x23mm
Power	59.9W
Input	180-295V~W
Output	1050mA
Dimmable	PUSH/DALI



Code	2x026.207
Measures	124x82x23mm
Power	59.9W
Input	180-295V~W
Output	1050mA
Dimmable	0-10V

Other Accessories



Code	099.142
Description	Emergency Kit
Notes	