

FLESSIBLE PENDANT



CATEGORY:

Indoor, Suspension, Ceiling

MATERIALS:

PMMA

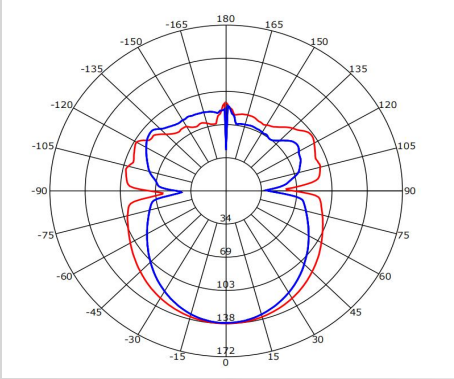
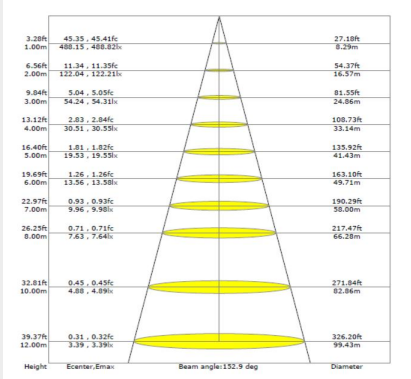
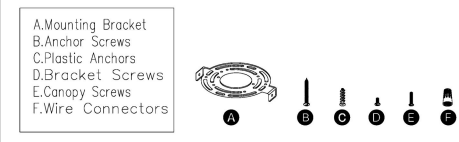
MATERIALS:

1. Available in flexible length and shape.
2. Tube dia:0.9"
3. 360 deg full light emitting.
4. Operation Voltage: DC24V, non-dimmable .
5. Efficiency: ≥ 70 lm/w

DIMENSION

Type	Suspended		Size									
<p>D:0.9"(23mm) L:per request Rn:Per request</p>	Model No	D	L	Rn								
	LL0180S	0.9"(23mm)	Per request	Per request								
Ordering Format	Model No.	Installation		Power	CRI	CCT		Control		Body Color		Dimension code
	LL0180	S	suspended	12w/m	80+	30K	3000K	STD	non-dimming	MW	Milk White	TBD
					90+	35K	3500K					
						40K	4000K					
						50K	5000K					
Order Example:	LL0180S-14W-90-30K-STD--MW-4											
Certificate	UL1598 / UL8750 / LM80 / EN62471											

LIGHT DISTRIBUTION and OPTICAL SYSTEM

			
Accessories 		Continuous run	
Material		LED system	
LED Driver	YEONGDEOK or Equivalent, DC24V, PF>0.5, no flicker, UL Cert	LED	Samsung 2835, 3V, 60mA
Alu PCB	2.0W.M/K, UL Cert	CCT	2700K, 3000K, 3500K, 4000K and 5000K with a great color consistency (within 3-step MacAdam ellipse)
Housing	Alumium6063, painting.	Led life	Minimum 50,000h with 70% of lumen maintenance in 25C ambient temperature, in compliance with IES LM-80 testing measurements.
Lens	Silicon, Anti-UV	Operation temp	minus 20C to 40C (centigrade)
Other	New Shine Lighting reserves the right to make any design changes for continuous improvement without notification, contact us for the latest technical information!	File name	NS/SS-LL0180-REV2.0