

CATEGORY:

Indoor, Suspension, Ceiling

MATERIALS:

PMMA

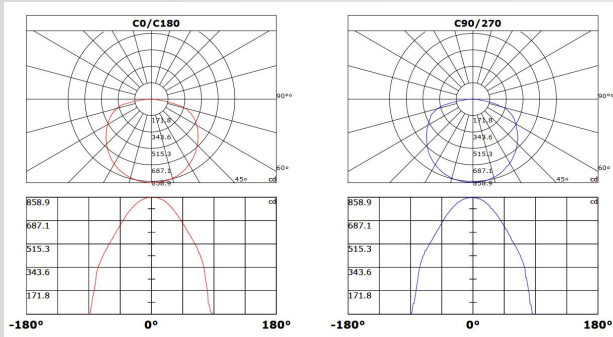
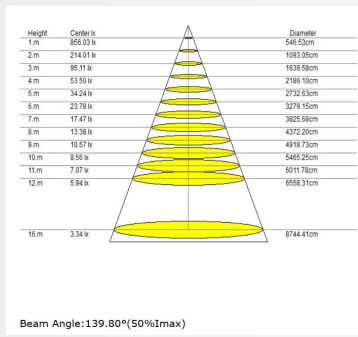

MATERIALS:

1. Available in standard light, with multi-color lip
2. Outer color finishes (black, white), and 9 colors for lip, also can be customized
3. Operation Voltage: AC120-277V, 0-10v dimming and non-dimmable for optional
4. Efficiency: $\geq 70\text{lm/w}$

DIMENSIONS:

Type	Surface Mounted				Size								
	Model type	L	W	H	Dimension Code	/	/						
	LL0202M-15W	14.2"(360mm)	14.2"(360mm)	4.6"(116mm)	S	/	/						
	LL0202M-25W	17.7"(450mm)	17.7"(450mm)	4.6"(116mm)	M	/	/						
	LL0202M-36W	23.6"(600mm)	23.6"(600mm)	4.6"(116mm)	L	/	/						
	LL0202M-50W	31.5"(800mm)	31.5"(800mm)	4.6"(116mm)	XL	/	/						
Type	Suspended				Size								
	Model type	D	W	H	A	B	Dimension Code						
	LL0202S-15W	14.2"(360mm)	14.2"(360mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	S						
	LL0202S-25W	17.7"(450mm)	17.7"(450mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	M						
	LL0202S-36W	23.6"(600mm)	23.6"(600mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	L						
	LL0202S-50W	31.5"(800mm)	31.5"(800mm)	3.5"(88mm)	10.0"(250mm)	2.0"(50mm)	XL						
Ordering Format	Model No.	Installation		Power	Ver	CRI	CCT		Control		Body Color		Dimension Code
	LL0202	S	suspended	15W	PRO	80+	30K	3000K	STD	non-dimming	SW	matt white	S
		M	surface mounted	25W		90+	35K	3500K	DIM	0-10V dimming	SB	matt black	M
				36W			40K	4000K			RAL	customized color	L
				50W			50K	5000K					XL
Order Example:	LL0202S-15W-PRO-90-35-DIM--SW-S												
Certificate	UL1598 / UL8750 / LM80 / EN62471												

LIGHT DISTRIBUTION and OPTICAL SYSTEM

Light distribution 		Optical system 	
Accessories <ul style="list-style-type: none"> A. Mounting Bracket B. Anchor Screws C. Plastic Anchors D. Bracket Screws E. Canopy Screws F. Wire Connectors 		Continuous run	
Material		LED system	
LED Driver	ARCATA or Equivalent, AC120-277V, PF>0.9, no flicker, UL Cert, Class P	LED	Samsung 2835, 3V, 150mA
Alu PCB	2.0W.M/K, UL Cert	CCT	2700K, 3000K, 3500K, 4000K and 5000K with a great color consistency (within 3-step MacAdam ellipse)
Housing	Alumium6063, painting.	Led life	Minimum 50,000h with 70% of lumen maintenance in 25C ambient temperature, in compliance with IES LM-80 testing measurements.
Lens	PMMA, UL-94VO, Anii-UV	Operation temp	minus 20C to 40C (centigrade)
Other			
		File name	NS/SS-LL0202-RPO-REV2.0