

**BYIBA**  
L I G H T



**ABACO-P 500**  
**(pendant)**

**BY-51190-P**

PROJECT

SPEC TYPE

NOTES



LED



IP20



4.6 kg

### GENERAL INFORMATION:

This modern and minimalist pendant lighting fixture is made from aluminum die-casting with an electrostatic powder coating. It measures Ø 19.7" (50 cm) x H 1.8" (4.5 cm) and is available in white, black and grey finishes. Featuring an LED light source, it operates at 110-277V with a wattage of 45W, offering color temperatures of 3000K, 4000K, and 5000K, with CRI options of 80 or 90. Designed for pendant mounting, it is ETL certified and ideal for indoor use.

### HOUSING:

AL. Die-Casting, Electrostatic Powder Coating

### FINISHING:

White, Black, Grey

### LIGHTING:

LED (SMD)

### INPUT VOLTAGE:

110-277V

### IP RATING:

20

### OPERATING TEMPERATURE RANGE:

-20 to +40 C

### COVER:

PC

### WIRE:

PVC

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)


[www.byiba.com](http://www.byiba.com)

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

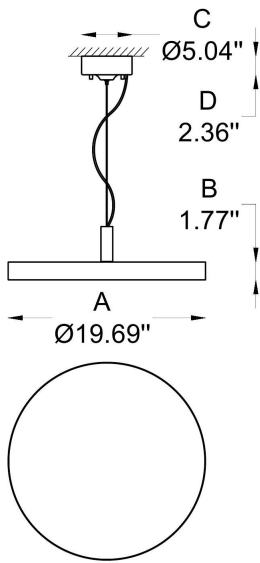

## HOW TO ORDER:

## CODE:

Example:  
CODE: BY-51190-P-K30-80-BL-RE

BY-51190-P-  
K30-80-BL-  
RE

## 1 DIMENSIONS:

A) Diameter- Ø: 19.7" (50 cm)  
B) Height - H: 1.8" (4.5 cm)  
C,D) Canopy - Ø: 5" (13 cm) x H: 2.36" (6 cm)

## 2 LIGHT SOURCE:

45W - LED - 1 050 mA - 4 541 lm

## 3 CCT SPECIFY:

-K30 3000K  
-K40 4000K  
-K50 5000K

## 4 CRI:

-80 CRI 80  
-90 CRI 90


## 5 FINISH OPTIONS:

-BL Black  
-GR Grey  
-WH White

## 6 DRIVER POSITION:

-RE Remove

## 7 PHOTOMETRIC:

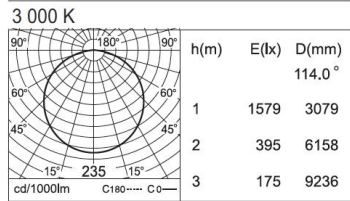

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

- TECHNICAL
- OUTDOOR
- DECORATIVE



CONTACT US:

sales@gordonbullard.com  
[www.byiba.com](http://www.byiba.com)  
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS