


BYIBA
L I G H T

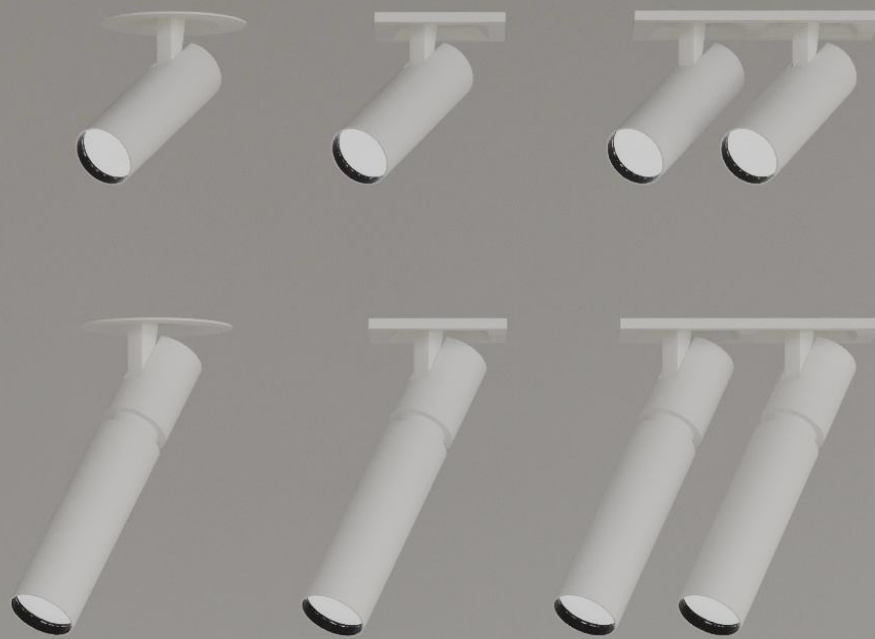


FLOW 35
(cylinders)

BY-27600-CL

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:


The Flow Cylinders Collection features recessed downlight fixtures with a modern, minimalist design, available in six models. Crafted from durable metal, the fixtures come in sleek Black, White, and Grey finishes. The compact designs offer different sizes, with options like a Ø 1.4" (3.5 cm) diameter and heights of 3.74" (9.5 cm) or 6.5" (16.5 cm). Equipped with energy-efficient LED lighting, the fixtures support 110-277V and offer wattage options of 7W for the Zoom Type model and 9W for the non-Zoom model, with color temperatures of 3000K, 4000K, or 5000K. These ETL-certified lights are ideal for indoor environments.

HOUSING:

AL. Die-Casting, Electrostatic Powder Coating

FINISHING:

White, Grey, Black



LIGHTING:

LED

INPUT VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C

REFLECTOR:

Lens

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE:

Example:
CODE: BY-27600-CL-01-W9-B1-K30-80-P-BL

BY-27600-
CL-01-W9-B1-
K30-80-P-BL

1 MODEL:


- 01 A) Diameter - Ø: 1.4" (3.5 cm)
B) Height - H: 3.74" (9.5 cm)
C) Mounting base - Ø: 3" (7.7 cm)
- 02 A) Diameter - Ø: 1.4" (3.5 cm)
B) Height - H: 3.74" (9.5 cm)
C) Mounting base - L/W: 2.7" (7cm) x 2.7" (7cm)
- 03 A) Diameter - Ø: 1.4" (3.5 cm)
B) Height - H: 3.74" (9.5 cm)
C) Mounting base - L/W: 5" (13cm) x 2.7" (7cm)
- 06 A) Diameter - Ø: 1.4" (3.5 cm)
B) Height - H: 6.5" (16.5 cm)
C) Mounting base - Ø: 3" (7.7 cm)
- 07 A) Diameter - Ø: 1.4" (3.5 cm)
B) Height - H: 6.5" (16.5 cm)
C) Mounting base - L/W: 2.7" (7cm) x 2.7" (7cm)
- 08 A) Diameter - Ø: 1.4" (3.5 cm)
B) Height - H: 6.5" (16.5 cm)
C) Mounting base - L/W: 5.1" (13 cm) x 2.7" (7cm)

2 LIGHT SOURCE:


- W9 LED - 9W - 450 mA - 1 980 lm (Non-Zoom type)
- W7 LED - 7W - 450 mA - 2 680 lm (Zoom type)

2 BEAM ANGLE - LUMINOUS FLUX:


- B1 12.5° 419 lm
- B2 17.5° 396 lm
- B3 25.5° 394 lm
- Z1 10.2° 176 lm (Zoom IN)
- Z0 31.0° 262 lm (Zoom Out)

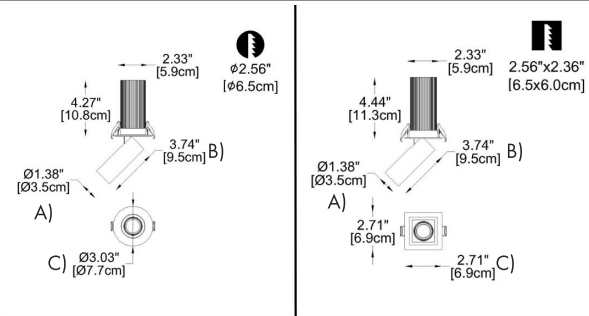

Zoom type model

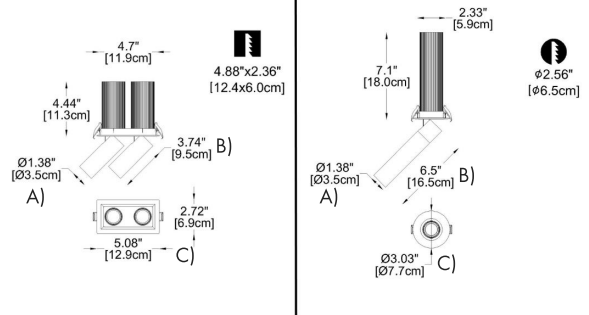

Zoom type model

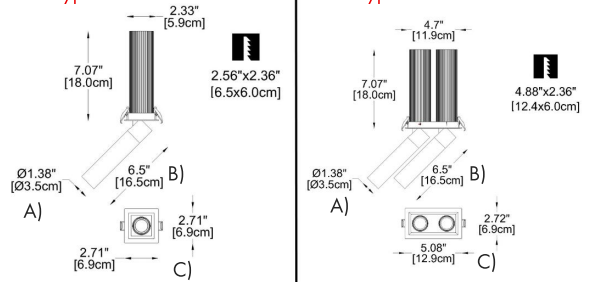

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE:

Example:
CODE: BY-27600-CL-01-W9-B1-K30-80-P-BL

BY-27600-
CL-01-W9-B1-
K30-80-P-BL

4 CCT SPECIFY:

-K30 3000K
-K40 4000K
-K50 5000K

5 CRI:

-80 CRI 80
-90 CRI 90

6 FINISH OPTIONS:

-BL Black
-GR Grey
-WH White









7 DRIVER POSITION:

Remove



8 PHOTOMETRICS:

Non Zoom type


Zoom type

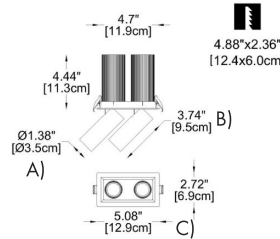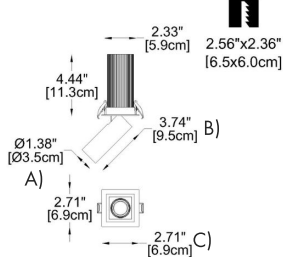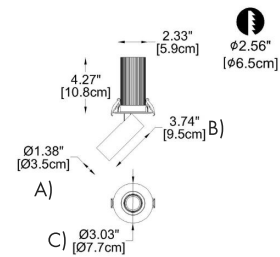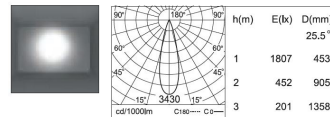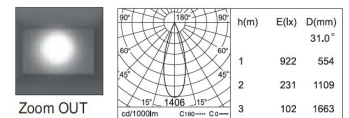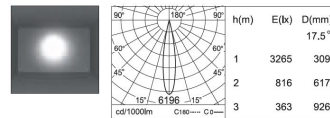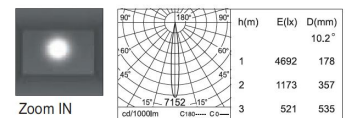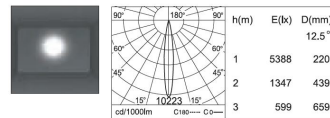

Zoom type model

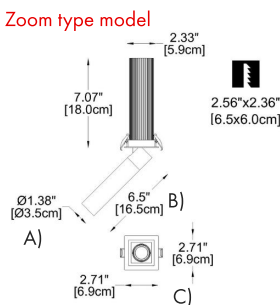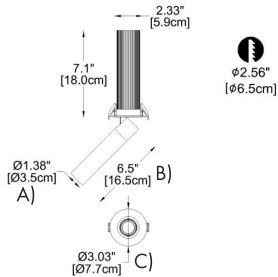

Zoom type model

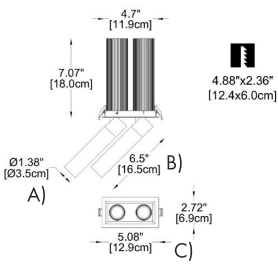

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646