

BYIBA
L I G H T



SILO 120
Direct & Indirect
(cylinders)
BY-51200-CL

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

Our modern and minimalist pendant and ceiling lighting fixtures offer both direct and indirect lighting. Constructed from aluminum die-casting with an electrostatic powder coating and a forging press heat sink with electro deposition coating, these fixtures measure \varnothing 4.7" (12 cm) x H 11" (27.5 cm). Available in dark, black, and grey finishes, they feature COB LEDs for down lighting and SMD LEDs for up lighting, operating at 15W for up lighting and 20W for down lighting. They support a voltage range of 110-277V and offer color temperatures of 3000K, 4000K, and 5000K (for SMD), with CRI options of 80 and 90. Non-dimmable and designed for pendant mounting, these ETL-certified fixtures are ideal for indoor use in residential and commercial spaces.

HOUSING

AL. Die-Casting, Electrostatic Powder Coating

FINISHING:

White, Black, Grey

LIGHTING:

LED (COB or SMD)

INPUT VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C

REFLECTOR:

AL. Anodized Specular Silver

WIRE:

PVC

LED



IP20



2.0 kg

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

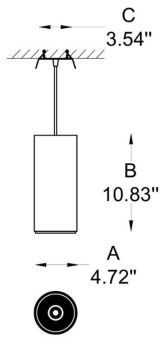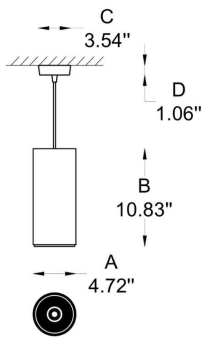

HOW TO ORDER:

CODE:

Example:
CODE: BY-51200-CL-01-K30-80-BL-RE

BY-51200-CL-01-K30-80-BL-RE

1 MODEL:

- 01 A) Diameter- Ø: 4.7" (12 cm)
B) Height - H: 11" (27.5 cm)
C) Canopy Ø: 3.5" (9 cm) x H: 1" (2.5 cm)
- 02 A) Diameter- Ø: 4.7" (12 cm)
B) Height H: 11" (27.5 cm)
C) Canopy Ø: 3.5" (8 cm)

2 LIGHT SOURCE:

UP LIGHTING - LED SMD
15W - 350 mA - 1051 lm

DOWN LIGHTING - LED COB
20W - 500 mA - 2368 lm

3 CCT SPECIFY:

- K30 3000K
- K40 4000K
- K50 5000K - (only for SMD type)

4 CRI:

- 80 CRI 80
- 90 CRI 90

6 FINISH OPTIONS:



- BL Black
- GR Grey
- WH White



PROJECT

SPEC TYPE

NOTES

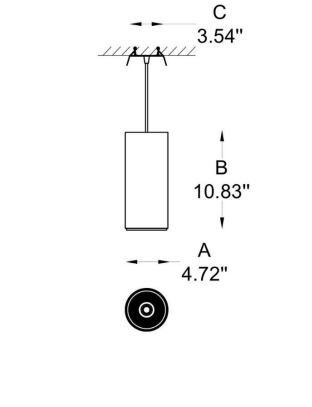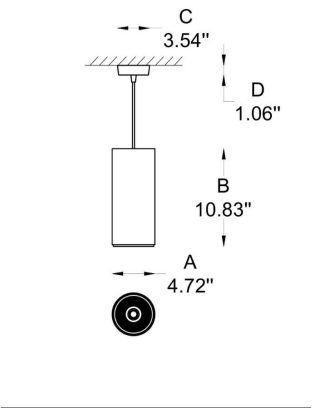

HOW TO ORDER:

CODE:

Example:
CODE: BY-51420-CL-01-K30-80-BL-RE



BY-51200-CL-01-K30-80-BL-RE

7 DRIVER POSITION:

-RE

-RE Remove

8 PHOTOMETRIC:

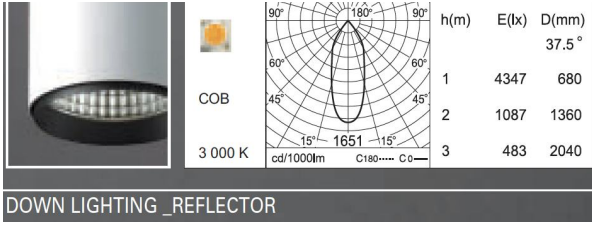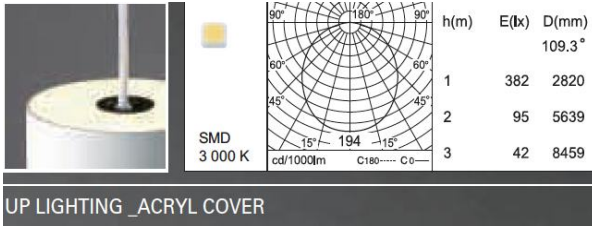

LED 110-277V IP20 2.0 kg

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646