

**BYIBA**  
L I G H T



**SILO 120**  
**(cylinders)**

**BY-51200-CL**

PROJECT

SPEC TYPE

NOTES



### GENERAL INFORMATION:

Our modern and minimalist pendant and ceiling lighting fixtures are crafted from aluminum die-casting with an electrostatic powder coating, measuring  $\varnothing$  4.7" (12 cm) x H 7.9" (20 cm). Available in dark, black, and grey finishes, they use COB or SMD LEDs with wattages of 28W, 27W, and 31W, supporting a voltage range of 110-277V. They offer color temperatures of 3000K, 4000K, and 5000K (only for SMD), with CRI options of 80 and 90. Non-dimmable and suitable for both pendant and ceiling mounting, these ETL-certified fixtures are designed for indoor use, ideal for residential and commercial spaces.

### HOUSING

AL. Die-Casting, Electrostatic Powder Coating

### FINISHING:

White, Black, Grey

### LIGHTING:

LED (COB or SMD)

### INPUT VOLTAGE:

110-277V

### IP RATING:

20

### OPERATING TEMPERATURE RANGE:

-20 to +40 C

### REFLECTOR:

AL. Anodized Specular Silver

### WIRE:

PVC

LED

110-277V



IP20



1.4 kg

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)


[www.byiba.com](http://www.byiba.com)

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

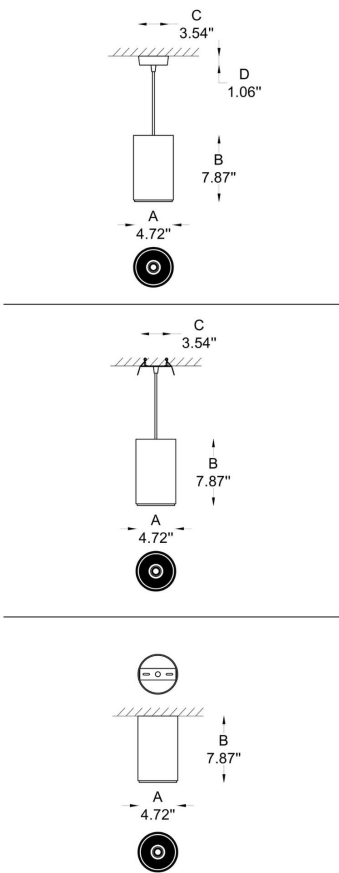

## HOW TO ORDER:

## CODE:

Example:  
CODE: BY-51200-CL-03-28W-B1-K30-80-P-BL-RE

BY-51200-  
CL-03-28W-B1-  
K30-80-P-BL-RE

## 1 MODEL:

- 03 A) Diameter- Ø: 4.7" (12 cm)  
B) Height - H: 7.9" (20 cm)  
C) Canopy Ø: 3.5"(9 cm) x H: 1" (2.5 cm)
- 04 A) Diameter- Ø: 4.7" (12 cm)  
B) Height H: 7.9" (20 cm)  
C) Canopy Ø: 3.5" (8 cm)
- 03-02 A) Diameter- Ø: 4.7" (12 cm)  
B) Height H: 7.9" (20 cm)

## 2 LIGHT SOURCE:

- 28W COB - 28W - 700 mA
- 27W SMD - 27W - 700 mA - 2549 lm
- 31W SMD - 31W - 900 mA - 2867 lm

## 3 BEAM ANGLE - LUMINOUS FLUX:

- B1 11.9° 3147 lm
- B2 20.1° 3118 lm
- B3 37.7° 3095 lm

(only for COB type)

## 4 CCT SPECIFY:

- K30 3000K
- K40 4000K
- K50 5000K - (only for SMD type)

## 5 CRI:

- 80 CRI 80
- 90 CRI 90



PROJECT

SPEC TYPE

NOTES

## HOW TO ORDER:


Example:  
CODE: BY-51200-CL-03-28W-B1-K30-80-P-BL-RE

## CODE:

BY-51200-CL-03-28W-B1-K30-80-P-BL-RE


## 6 INSTALLATION TYPE:

- P Pendant
- C Ceiling
- SM Surface Mounted

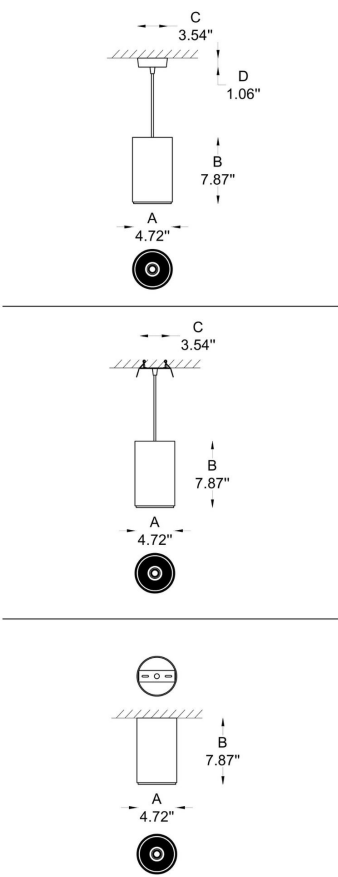

## 9 PHOTOMETRIC:


TYPE OF LED : COB

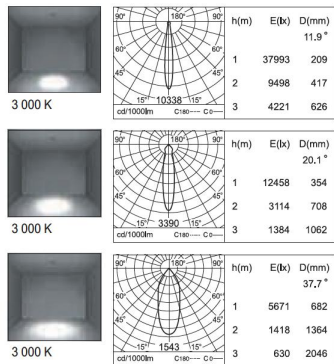

CCT MULTIPLIERS

	CRI 80	CRI 90
3 000 K	x 1.00	x 0.85
4 000 K	x 1.06	x 0.91

TYPE OF LED : SMD



LED 110-277V IP20 1.4 kg

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com  
[www.byiba.com](http://www.byiba.com)  
1 877-964-4646