

BYIBA
L I G H T



SILO 175
COB / SMD
(cylinders)
BY-51021-CL

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

Our modern and minimalist pendant and ceiling lighting fixtures are designed for contemporary indoor spaces, featuring durable aluminum die-casting with electrostatic powder coating and a forging press heat sink with electro deposition coating, measuring Ø 6.9" (17.5 cm) x H 9" (23 cm). Available in dark, black, and grey finishes, they use COB or SMD LEDs with wattages of 27W, 28W, 35W, and 41W, supporting 110-277V and color temperatures of 3000K, 4000K, and 5000K (SMD only), with CRI options of 80 and 90. These non-dimmable fixtures, suitable for both pendant and ceiling mounting, are ETL certified and ideal for residential and commercial indoor environments.

HOUSING

AL. Die-Casting, Electrostatic Powder Coating

FINISHING:

White, Black, Grey

LIGHTING:

LED (COB or SMD)

INPUT VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C

REFLECTOR:

AL. Anodized Specular Silver

WIRE:

PVC



WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS



CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

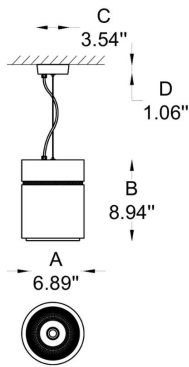

HOW TO ORDER:

CODE:

Example:
CODE: BY-51021-CL-01-28-K30-80-P-BL-A-RE

BY-51021-
CL-01-28-
K30-80-P-BL-A-
RE

1 MODEL:

-01 A) Diameter - Ø: 6.9" (17.5 cm)
 B) Height - H: 9" (23 cm)
 C) Canopy - Ø: 3.5" (9 cm) x H: 1" (2.5 cm)

-01-02 A) Diameter - Ø: 6.9" (17.5 cm)
 B) Height - H: 9" (23 cm)

2 LIGHT SOURCE:

-28W COB - 28W - 700 mA - 2976 lm
-35W COB - 35W - 900 mA - 3518 lm
-27W SMD - 27W - 700 mA - 2720 lm
-41W SMD - 41W - 1050 mA - 3714 lm

3 CCT SPECIFY:

-K30 3000K
-K40 4000K
-K50 5000K - (only for SMD type)

4 CRI:

-80 CRI 80
-90 CRI 90

5 INSTALLATION TYPE:

-P Pendant
-C Ceiling



6 FINISH OPTIONS:

-BL Black
-GR Grey
-WH White

PROJECT

SPEC TYPE

NOTES

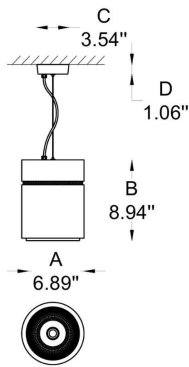


HOW TO ORDER:

CODE:

Example:
CODE: BY-51021-CL-01-28-K30-80-P-BL-A-RE

BY-51021-
CL-01-28-
K30-80-P-BL-A-
RE

7 FLANGE OPTIONS:





8 DRIVER POSITION:

-RE

-RE Remove



9 PHOTOMETRICS:

TYPE OF LED : SMD



TYPE OF LED : COB

CCT MULTIPLIERS
CRI 80 CRI 90
3 000 K x 1.00 x 0.85
4 000 K x 1.06 x 0.91



WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646