

BYIBA
L I G H T



SMOOTH-P
(pendant)

BY-51260-P

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

Our modern and minimalist pendant lighting fixtures are crafted from aluminum die-casting with an electrostatic powder coating, measuring Ø 5.35" (13.6 cm) x H 5.2" (13.2 cm). Available in dark, black, and grey finishes, these fixtures feature 19W LEDs, supporting a voltage range of 110-277V with color temperatures of 3000K, 4000K, and 5000K, and CRI options of 80 or 90. Non-dimmable and designed for pendant mounting, these ETL-certified fixtures are ideal for indoor use in both residential and commercial environments.

HOUSING:

AL. Die-Casting, Electrostatic Powder Coating

FINISHING:

White, Black, Grey

LIGHTING:

SMD (55 LED)

INPUT VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C

COVER:

PC



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

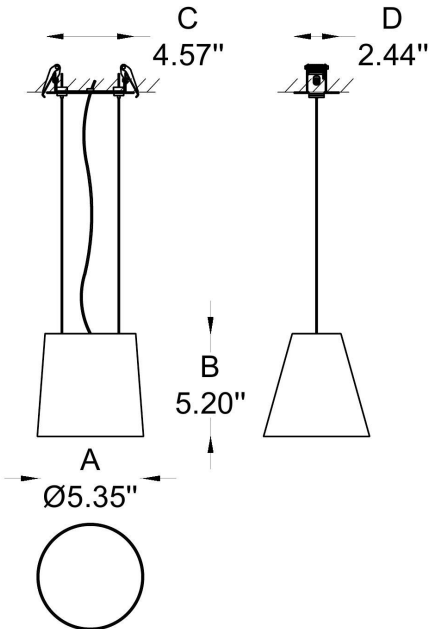

HOW TO ORDER:

CODE:

Example:
CODE: BY-51260-P-K30-90-BL-RE

BY-51260-P-
K30-90-BL-RE

1 DIMENSIONS:

A) Diameter- Ø: 5.35" (13.6 cm)
B) Height - H: 5.2" (13.2 cm)
C/D) Canopy L: 4.5"(11.6 cm) x W: 2.4" (6.2 cm)

2 LIGHT SOURCE:

LED - 19W - 500 mA - 1 469 lm

3 CCT SPECIFY:

-K30 3000K
-K40 4000K
-K50 5000K

4 CRI:

-80 CRI 80
-90 CRI 90


5 FINISH OPTIONS:

-BL Black
-GR Grey
-WH White

6 DRIVER POSITION:

-RE Remove

7 PHOTOMETRICS:

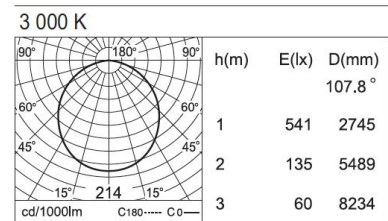

LED 110-277V IP20 1.6 kg

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS