

**FLAREX**  
**(cylinders)**

**BY-MM35-CL**

PROJECT

SPEC TYPE

NOTES



LED

110-277V



### GENERAL INFORMATION:

The Vistix pendant cylinder lighting fixture offers a sleek and modern design, perfect for indoor environments. Made from aluminum and available in sand white or matte black finishes, it features a compact size of  $\varnothing$  2.44" x H 8.66". Powered by a 20W LED (500 mA) with 1400 lm output and CRI 80, it delivers a beam angle ranging from 18° to 60°. With CCT options of 2700K, 3000K, and 4000K, this fixture supports 0-10V dimming or non-dimmable settings. Rated IP20, it operates on 110-277V and is ETL certified for safety and quality. Ideal for pendant mounting in modern interiors.

### MATERIAL:

Aluminum

### FINISHING:

White

### LIGHTING:

LED

### INPUT VOLTAGE:

110-277V

### DRIVER POSITION:

Remove

### IP RATING:

20

### OPERATING TEMPERATURE RANGE:

-10 to +45 C

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)


[www.byiba.com](http://www.byiba.com)

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

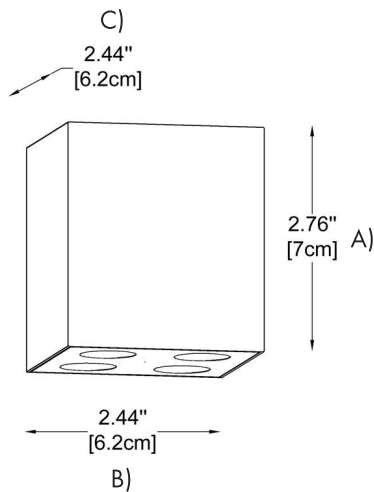

### HOW TO ORDER:

### CODE:

Example:  
CODE: BY-MM35-CL-B1-K30-DIM

BY-MM35-  
CL-B1-K30-  
DIM

### 1 DIMENSIONS:

A) Height - H: 2.75" (7 cm)  
B) Width - W: 2.44" (6.2 cm)  
C) Depth - D: 2.44" (6.2 cm)

### 2 LIGHT SOURCE:

LED / 10W / 68lm/w / CRI 90

### 3 BEAM ANGLE:

-B1 30°  
-B2 45°

### 4 CCT:

-K27 2700K  
-K35 3500K  
-K30 3000K  
-K40 4000K  
-K50 5000K

### 5 DIMMING OPTIONS:

-DIM 0-10V  
-NON Non-Dimmable  
-DALI DALI

LED



[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)

[www.byiba.com](http://www.byiba.com)

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

## HOW TO ORDER:


CODE:

Example:  
CODE: BY-MM35-CL-B1-K30-DIM

BY-MM35-CL-B1-K30-DIM


## 6 PHOTOMETRICS

Beam angle : 30°

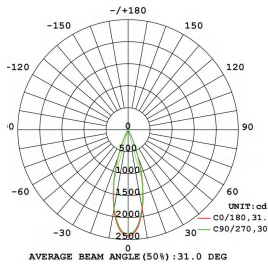


Height	Beam Diameter	Beam Diameter
1m	1411.24141x	54.39cm
2m	407.7403.51x	109.17cm
3m	179.2244.21x	163.76cm
4m	100.7130.93x	218.35cm
5m	64.44.94.571x	272.94cm
6m	44.75.67.061x	327.52cm
7m	32.48.43.271x	382.11cm
8m	25.17.37.721x	436.70cm
9m	19.49.29.801x	491.29cm
10m	14.11.24.141x	545.87cm

Beam angle : 45°

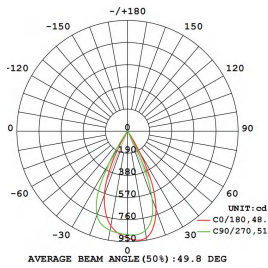

Height	Beam Diameter	Beam Diameter
1m	620.2.929.61x	89.82cm
2m	155.1.230.41x	179.64cm
3m	69.92.103.31x	269.46cm
4m	38.77.58.101x	359.27cm
5m	24.61.37.181x	449.09cm
6m	17.23.25.821x	538.91cm
7m	12.66.18.911x	628.73cm
8m	9.691.14.521x	718.54cm
9m	7.457.11.441x	808.35cm
10m	6.202.9.2951x	898.16cm

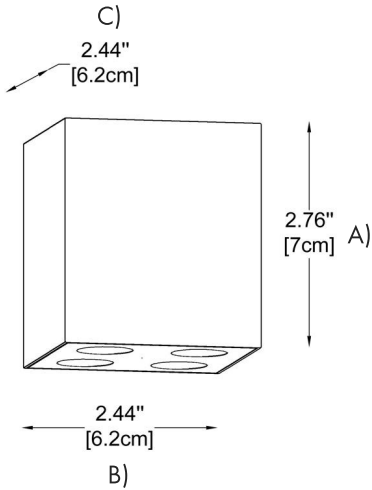

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com  
[www.byiba.com](http://www.byiba.com)  
1 877-964-4646