

**BYIBA**  
L I G H T



**NOLARA**  
(cylinders)

BY-HS40I-50-CL

PROJECT

SPEC TYPE

NOTES



**GENERAL INFORMATION:**

The Nolara pendant light combines modern minimalism with a sleek aluminum design. With a diameter of Ø 1.96" (5 cm) and a height of 11.8" (30 cm), it's perfect for contemporary spaces. Available in White, Black, or custom finishes, Nolara features energy-efficient LED lighting (6W, CRI 90) and operates at DC48V. Mounting options include suspension, with dimming choices of 0-10V, Non-Dimmable, and DALI. Offering CCT options of 2700K, 3000K, and 4000K, the fixture is ETL certified and ideal for indoor environments.

**MATERIAL:**

Aluminum

**FINISHING:**

Black, White, Custom on request\*

**LIGHTING:**

LED

**INPUT VOLTAGE:**

DC48V

**DRIVER POSITION:**

Remove

**IP RATING:**

20

**OPERATING TEMPERATURE RANGE:**

-10 to +45 C

LED



[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)

[www.byiba.com](http://www.byiba.com)

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

**HOW TO ORDER:**

**CODE:**

Example:  
CODE: BY-HS40I-50-CL-B1-K30-BL-DIM

BY-HS40I-50-CL-B1-K30-DIM

**1 DIMENSIONS:**

- A) Diameter - Ø: 1.96" (5 cm)
- B) Height - H: 11.8" (30 cm)
- C) Canopy - Ø: 5.5" (14 cm)

**2 LIGHT SOURCE:**

LED / 6W / CRI 90

**3 BEAM ANGLE:**

- B1 24°
- B2 36°

**4 CCT and LUMINOUS FLUX:**


- K27 2700K = 360 lm
- K30 3000K = 370 lm
- K40 4000K = 390 lm

**5 FINISH OPTIONS:**

- BL Black
- WH White
- CUS Custom on request\*

**6 DIMMING OPTIONS:**

- DIM 0-10V
- NON Non-Dimmable
- DALI DALI

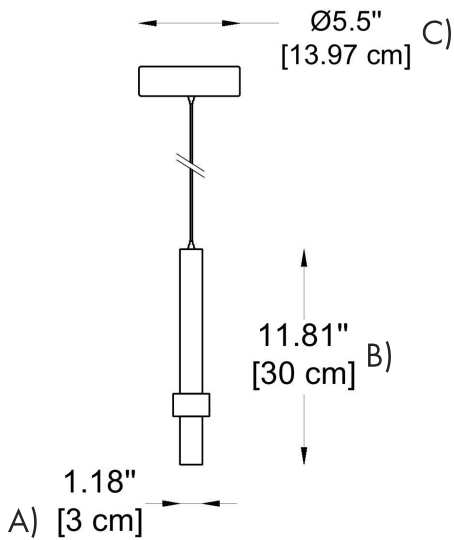

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com  
[www.byiba.com](http://www.byiba.com)  
1 877-964-4646