

BYIBA
L I G H T



STIGE P
(cylinders)

BY-3258-CL

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The Stige P pendant light offers a modern, minimalist design with an aluminum structure. With a diameter of \varnothing 2.36" (6 cm) and a height of 7.87" (20 cm), it includes a 59" (150 cm) adjustable cable and a canopy measuring \varnothing 5.5" (14 cm). Available in White and Black finishes, this fixture features a 6.7W LED light source with a CRI of 90, delivering focused lighting with beam angle options of 20°, 40°, and 60°. Operating at 110-277V, the Stige P offers dimming options including 0-10V or Non-Dimmable, with CCT choices of 2700K, 3000K, and 4000K. ETL certified for quality, it's designed for indoor use.

MATERIAL:

Varnished aluminum alloy body and frontal glass.

FINISHING:

White, Black

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

IP RATING:

40

DRIVER POSITION:

Remote

OPERATING TEMPERATURE RANGE:

-20 to +40 C

LED



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

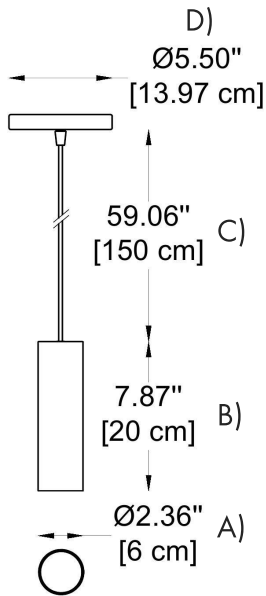

HOW TO ORDER:

CODE:

Example:
CODE: BY-3258-CL-K27-B1-BM-DIM

BY-3258-CL-
K27-B1-BM-
DIM

1 DIMENSIONS:

- A) Diameter - Ø: 2.36" (6 cm)
- B) Height - H: 7.87" (20 cm)
- C) Cable - H: 59" (150 cm)
- D) Canopy - Ø: 5.5" (14 cm)

2 LIGHT SOURCE:

LED / 6,7W / CRI 90

3 CCT and LUMINOUS FLUX:

- K27 2700K = 510 lm
- K30 3000K = 650 lm
- K40 4000K = 680 lm

4 BEAM ANGLE:

- B1 20°
- B2 40°
- B3 60°

5 FINISH OPTIONS:

- BM Black
- WH White

6 DIMMING OPTIONS:

- DIM 0-10V
- NON Non-Dimmable



WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646