


BYIBA
L I G H T

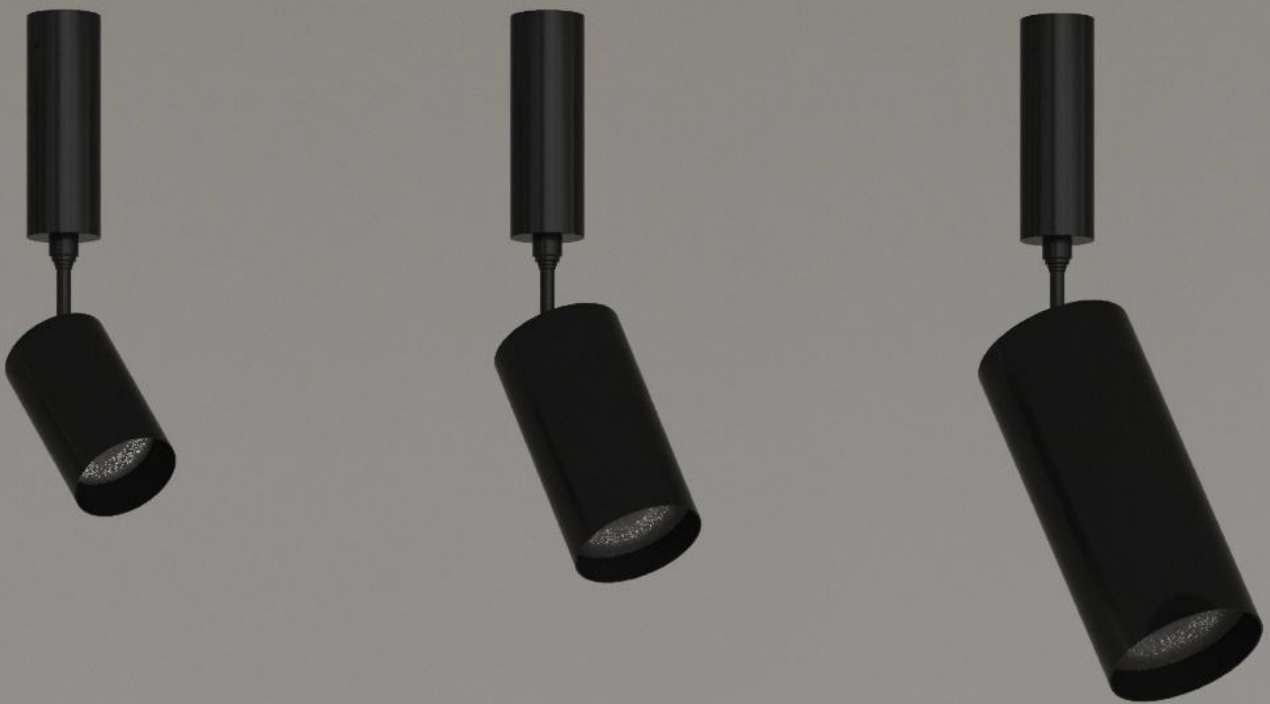

SHYLO 3CCT
(cylinders)

BY-HM40S-CL

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The Shylo Cylinders offer a modern, minimalist lighting solution made from high-quality aluminum. Available in three sizes—Medium (Ø 1.65" x H 2.68"), Large (Ø 2.05" x H 3.75"), and Extra Large (Ø 2.44" x H 5.7")—these surface-mounted fixtures seamlessly blend with various interior styles. Available finishes include White, Black, and customizable options upon request. Powered by DC48V LED technology, the Shylo features a 3CCT dial switch (2700K, 3000K, 4000K) for adjustable color temperature. Dimming options include 0-10V, Non-Dimmable, and DALI. ETL certified, making it a reliable choice for indoor applications.

MATERIAL:

Aluminum

FINISHING:

White, Black, Custom on request*

LIGHTING:

LED

INPUT VOLTAGE:

DC48V

DRIVER POSITION:

Remove

BEAM ANGLE:

15°, 20°, 24°, 30°, 36°, 45°, 50°

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-10 to +45 C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com




www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

CODE:

Example:
CODE: BY-HM40S-CL-42C-K30-B30-1-BL-DIM

BY-HM40S-
CL-42C-K30-
B30-1-BL-DIM

1 MODEL:

- 42C A) Diameter - Ø: 1.65" (4.2 cm)
 B) Height - H: 2.68" (6.8 cm)
 C) Canopy - Ø: 1.14" (2.9 cm) x H: 3.4" (8.6")
- 52C A) Diameter - Ø: 2.05" (5.2 cm)
 B) Height - H: 3.75" (9.5 cm)
 C) Canopy - Ø: 1.14" (2.9 cm) x H: 3.4" (8.6")
- 62C A) Diameter - Ø: 2.44" (6.2 cm)
 B) Height - H: 5.7" (14.5 cm)
 C) Canopy - Ø: 1.14" (2.9 cm) x H: 3.4" (8.6")

2 LIGHT SOURCE:

- LED / 6.6W / 445 lm / CRI 90 for 42 model
- LED / 13.2W / 950 lm / CRI 90 for 52 model
- LED / 16.5W / 1170 lm / CRI 90 for 62 model

3 3CCT Dial switch

3000K / 3800K / 5000K

4 BEAM ANGLE - LUMINOUS FLUX:

- B42-1 28°
- B42-2 36° for 42 model
- B42-3 50°
- B52-1 24°
- B52-2 38° for 52 model
- B52-3 50°
- B62-1 15°
- B62-2 24° for 62 model
- B62-3 36°
- B62-4 50°

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE:

Example:
CODE: BY-HM40S-CL-42C-K30-B30-1-BL-DIM




BY-HM40S-CL-42C-K30-B30-1-BL-DIM

5 FINISH OPTIONS:

- BL Black
- WH White
- CUS Custom on request*

6 DIMMING OPTIONS:

- DIM 0-10V
- NON Non-Dimmable
- DALI DALI



LED

IP20

355°

90°

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



CONTACT US:


sales@gordonbullard.com
www.byiba.com
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS

7 PHOTOMETRICS:


For 42 model

Beam angle : 28°

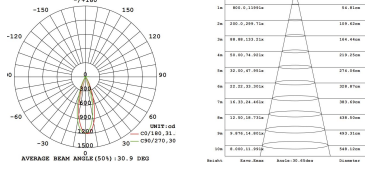


For 54 model

Beam angle : 24°

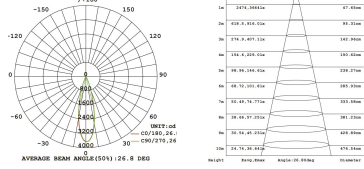


For 62 model


Beam angle : 15°

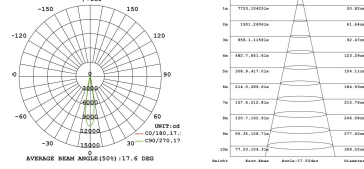


Beam angle : 36°

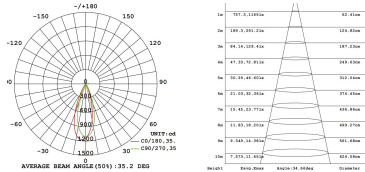


Beam angle : 38°

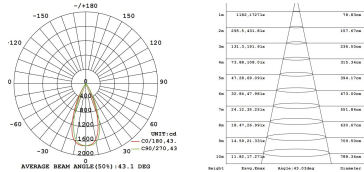


Beam angle : 24°

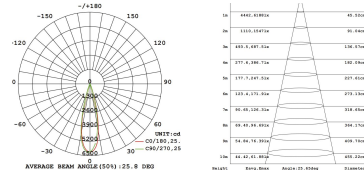


Beam angle : 50°

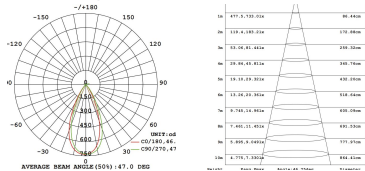


Beam angle : 50°

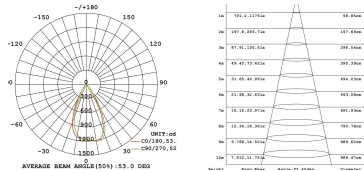

Beam angle : 36°

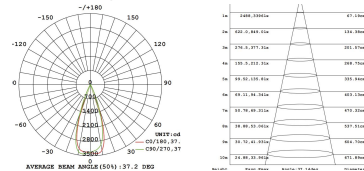

Beam angle : 50°

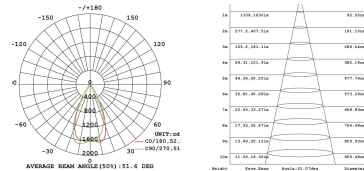

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
 1 877-964-4646