

BYIBA
L I G H T



SHYLO
(cylinders)

BY-HM40S-CL

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The Shylo Cylinders lighting fixtures feature a modern, minimalist design, crafted from durable aluminum. Available in four sizes—Small (Ø 1.18" x H 2.17"), Medium (Ø 1.65" x H 2.68"), Large (Ø 2.05" x H 3.75"), and Extra Large (Ø 2.44" x H 5.7")—this versatile fixture is perfect for surface mounting in indoor environments. Offered in White, Black, and customizable finishes upon request, the Shylo Cylinders utilize LED lighting technology with DC48V power and multiple CCT options (2700K, 3000K, 4000K). Dimming options include 0-10V, Non-Dimmable, and DALI. Certified to ETL standards for quality and safety.

MATERIAL:

Aluminum

FINISHING:

White, Black, Custom on request*

LIGHTING:

LED

INPUT VOLTAGE:

DC48V

DRIVER POSITION:

Remove

BEAM ANGLE:

12°, 15°, 20°, 24°, 30°, 36°, 45°, 50°

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-10 to +45 C

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE:

Example:
CODE: BY-HM40S-CL-30-K30-B30-1-BL-DIM

BY-HM40S-CL-30-K30-B30-1-BL-DIM

1 MODEL:


- 30 A) Diameter - Ø: 1.18" (3 cm)
B) Height - H: 2.17" (5.5 cm)
C) Canopy - Ø: 1.14" (2.9 cm) x H: 3.4" (8.6")
- 42 A) Diameter - Ø: 1.65" (4.2 cm)
B) Height - H: 2.68" (6.8 cm)
C) Canopy - Ø: 1.14" (2.9 cm) x H: 3.4" (8.6")
- 52 A) Diameter - Ø: 2.05" (5.2 cm)
B) Height - H: 3.75" (9.5 cm)
C) Canopy - Ø: 1.14" (2.9 cm) x H: 3.4" (8.6")
- 62 A) Diameter - Ø: 2.44" (6.2 cm)
B) Height - H: 5.7" (14.5 cm)
C) Canopy - Ø: 1.14" (2.9 cm) x H: 3.4" (8.6")

2 LIGHT SOURCE:

- LED / 4.4W / 285 lm / CRI 90 for 30 model
- LED / 6.6W / 445 lm / CRI 90 for 42 model
- LED / 13.2W / 930 lm / CRI 90 for 52 model
- LED / 16.5W / 1020 lm / CRI 90 for 62 model

3 CCT and

- K27 2700K
- K30 3000K
- K40 4000K

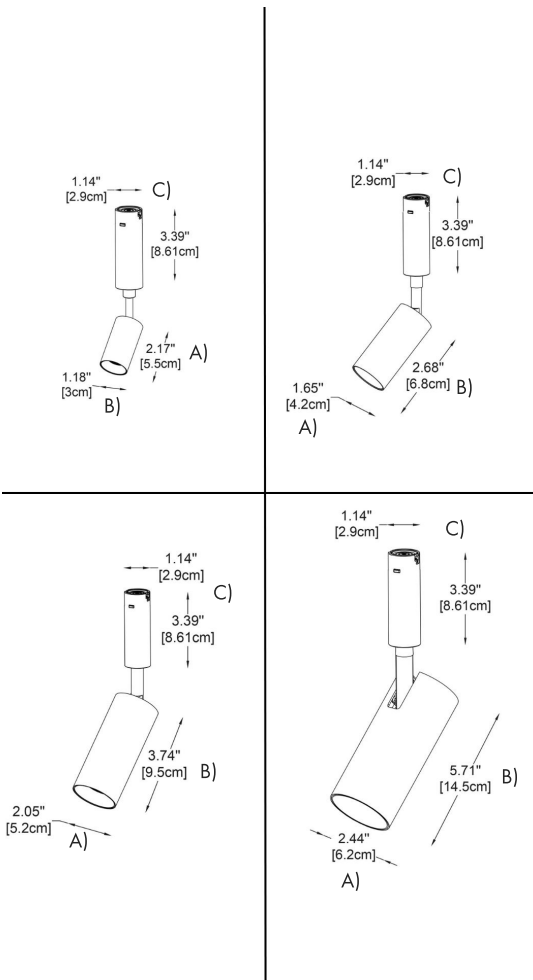

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE:

Example:
CODE: BY-HM40S-CL-30-K30-B30-1-BL-DIM

BY-HM40S-CL-30-K30-B30-1-BL-DIM

4 BEAM ANGLE - LUMINOUS FLUX:


-B30-1	18°	270 lm	
-B30-2	24°	285 lm	for 30 model
-B30-3	36°	310 lm	
-B30-4	50°	335 lm	
-B42-1	15°	420 lm	
-B42-2	24°	445 lm	for 42 model
-B42-3	36°	480 lm	
-B42-4	50°	515 lm	
-B52-1	15°	885 lm	
-B52-2	20°	930 lm	for 52 model
-B52-3	36°	1000 lm	
-B52-4	50°	1090 lm	
-B62-1	12°	965 lm	
-B62-2	20°	1020 lm	for 62 model
-B62-3	30°	1095 lm	
-B62-4	45°	1160 lm	

5 FINISH OPTIONS:

- BL Black
- WH White
- CUS Custom on request*

6 DIMMING OPTIONS:

- DIM 0-10V
- NON Non-Dimmable
- DALI DALI

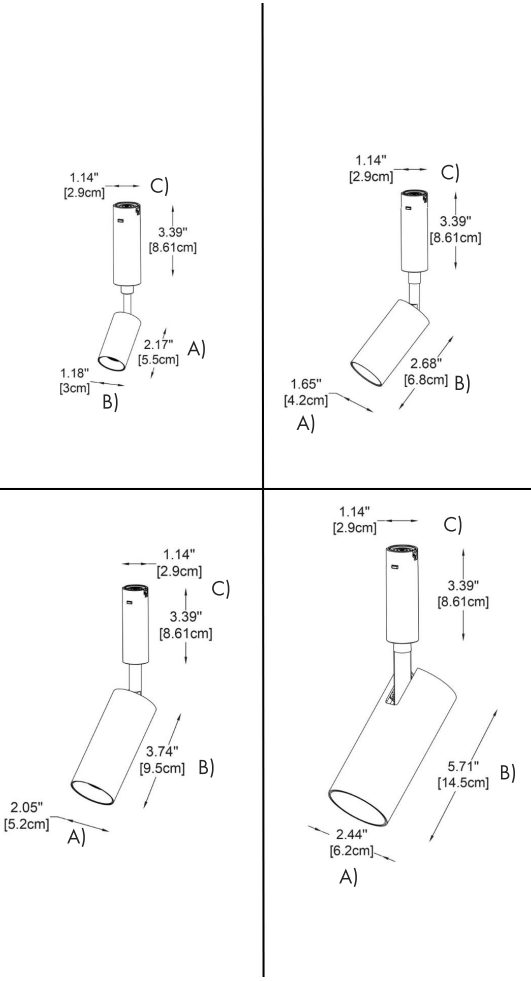

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS


CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

7 PHOTOMETRICS:


For 30 model

Beam angle : 18°

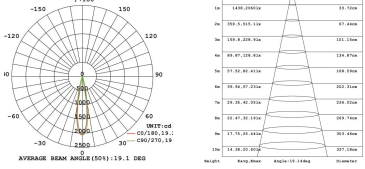


For 42 model

Beam angle : 15°

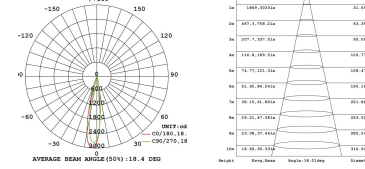


For 54 model

Beam angle : 15°

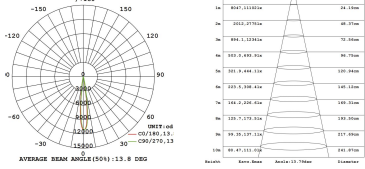


For 62 model


Beam angle : 12°

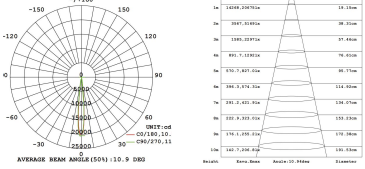


Beam angle : 24°

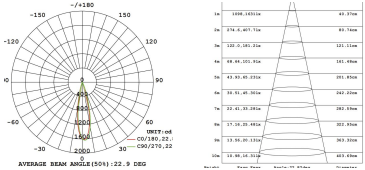


Beam angle : 24°

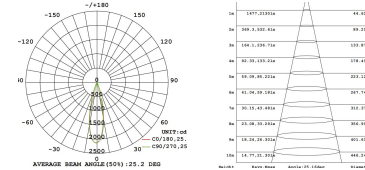


Beam angle : 20°

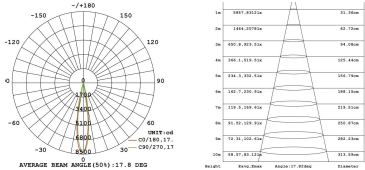


Beam angle : 20°

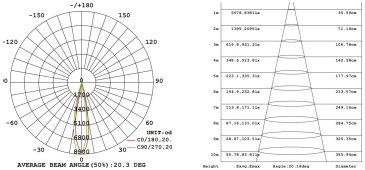


Beam angle : 36°

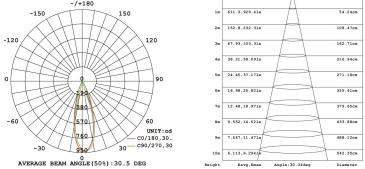


Beam angle : 36°

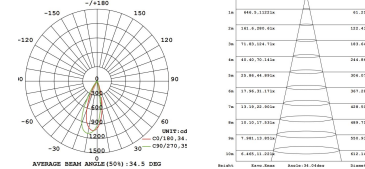


Beam angle : 36°

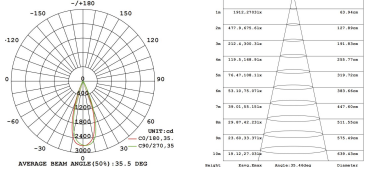


Beam angle : 30°

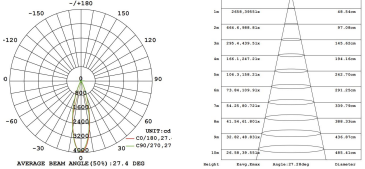


Beam angle : 50°

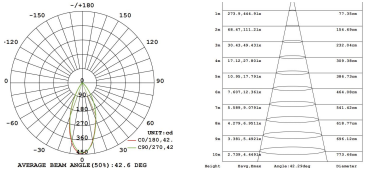

Beam angle : 50°

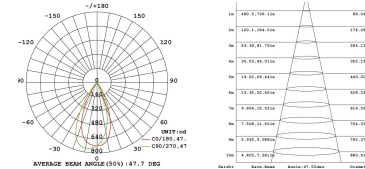

Beam angle : 50°

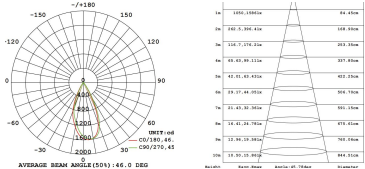

Beam angle : 45°

